BFP840ESD

SiGe:C NPN RF bipolar transistor

Order now | Technical documents | Simulation | Support

Product description

The BFP840ESD is a discrete RF heterojunction bipolar transistor (HBT) with an integrated ESD protection suitable for 5 GHz band applications.

Feature list

- Unique combination of high end RF performance and robustness: 20 dBm maximum RF input power, 1.5 kV HBM ESD hardness
- High transition frequency f_T = 80 GHz to enable low noise figure at high frequencies: NF_{min} = 0.85 dB at 5.5 GHz, 1.8 V, 5 mA
- High gain G_{ms} = 22.5 dB at 5.5 GHz, 1.8 V, 10 mA
- OIP_3 = 22 dBm at 5.5 GHz, 1.8 V, 10 mA
- Suitable for low voltage applications e.g. V_{CC} = 1.2 V and 1.8 V (2.85 V, 3.3 V, 3.6 V require a corresponding collector resistor)

Product validation

Qualified for industrial applications according to the relevant tests of JEDEC47/20/22.

Potential applications

- Mobile and fixed connectivity applications: WLAN, WiMAX and UWB
- Satellite communication systems: satellite radio (SDARs, DAB), navigation systems (e.g. GPS, GLONASS, BeiDou, Galileo)

Device information

Table 1 Part information

Product name / Ordering code	Package	Pin configuration				Marking	Pieces / Reel
BFP840ESD / BFP840ESDH6327XTSA1	SOT343	1 = B	2 = E	3 = C	4 = E	T8s	3000

***Attention*: ESD (Electrostatic discharge) sensitive device, observe handling precautions**

Table of contents

Product description 1
Feature list 1
Product validation 1
Potential applications 1
Device information 1
Table of contents 2
1 Absolute maximum ratings 3
2 Thermal characteristics 4
3 Electrical characteristics 5
3.1 DC characteristics 5
3.2 General AC characteristics 5
3.3 Frequency dependent AC characteristics 6
3.4 Characteristic DC diagrams 10
3.5 Characteristic AC diagrams 13
4 Package information SOT343 20
Revision history 21
Disclaimer 22

1 Absolute maximum ratings

Table 2 Absolute maximum ratings at T_A = 25 °C (unless otherwise specified)

Parameter	Symbol	Values		Unit	Note or test condition
		Min.	Max.		
Collector emitter voltage	V_{CEO}	–	2.25	V	Open base
			2.0		T_A = -55 °C, open base
Collector base voltage [1]	V_{CBO}		2.9		Open emitter
			2.6		T_A = -55 °C, open emitter
Collector emitter voltage [2]	V_{CES}		2.25		E-B short circuited
			2.0		T_A = -55 °C, E-B short circuited
Base current	I_B	-5	3	mA	–
Collector current	I_C	–	35		
RF input power	P_{RFin}	–	20	dBm	
ESD stress pulse	V_{ESD}	-1.5	1.5	kV	HBM, all pins, acc. to JESD22-A114
Total power dissipation [3]	P_{tot}	–	75	mW	$T_S \leq$ 108 °C
Junction temperature	T_J	–	150	°C	–
Storage temperature	T_{Stg}	-55			

Attention**: **Stresses above the max. values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Exceeding only one of these values may cause irreversible damage to the integrated circuit.

1 V_{CBO} is similar to V_{CEO} due to design.
2 V_{CES} is identical to V_{CEO} due to design.
3 T_S is the soldering point temperature. T_S is measured on the emitter lead at the soldering point of the PCB.

2 Thermal characteristics

Table 3 Thermal resistance

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Junction - soldering point	R_{thJS}	–	551	–	K/W	–

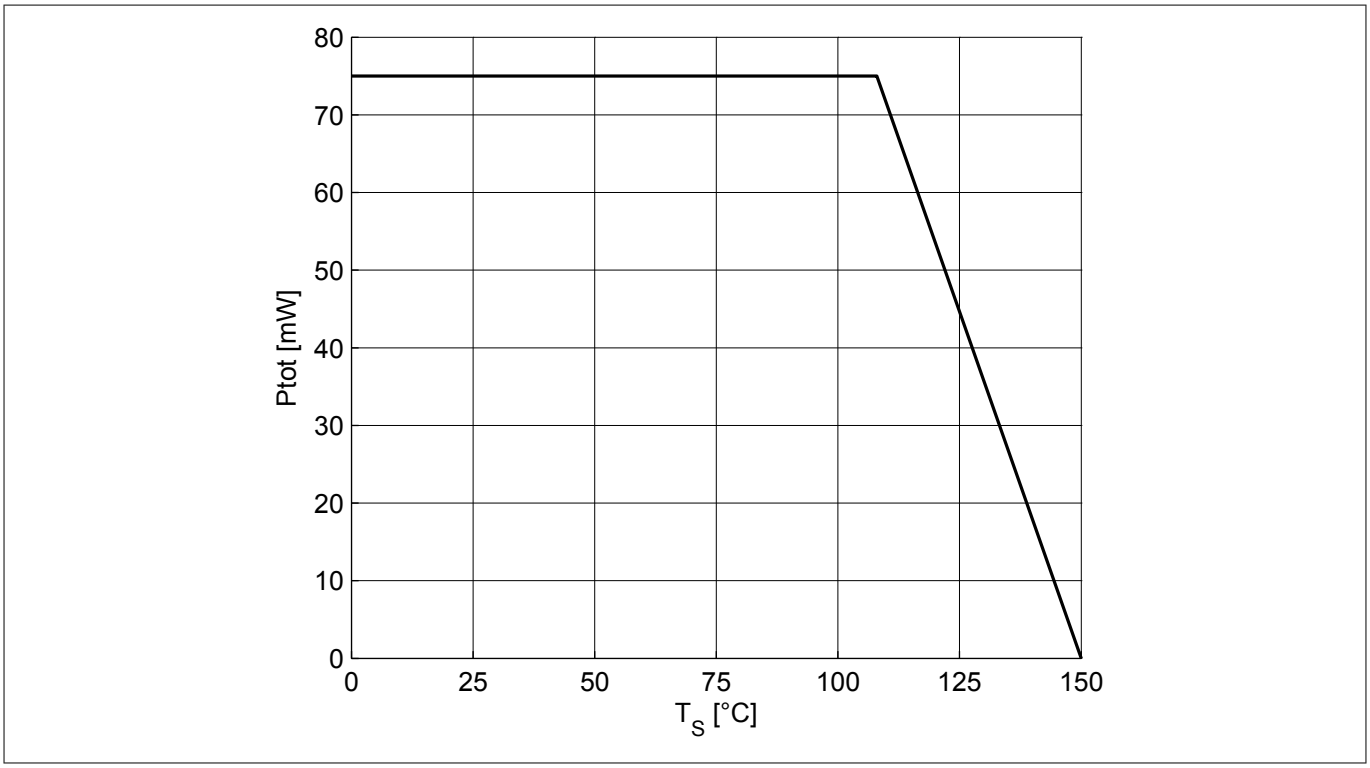

Figure 1 Total power dissipation P_{tot} = f(T_S)

3 Electrical characteristics

3.1 DC characteristics

Table 4 DC characteristics at T_A = 25 °C

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Collector emitter breakdown voltage	$V_{(BR)CEO}$	2.25	2.6	–	V	I_C = 1 mA, I_B = 0, open base
Collector emitter leakage current	I_{CES}	–	–	400 [1)]	nA	V_{CE} = 1.5 V, V_{BE} = 0, E-B short circuited
Collector base leakage current	I_{CBO}			400 [1)]		V_{CB} = 1.5 V, I_E = 0, open emitter
Emitter base leakage current	I_{EBO}			10 [1)]	µA	V_{EB} = 0.5 V, I_C = 0, open collector
DC current gain	h_{FE}	150	260	450		V_{CE} = 1.8 V, I_C = 10 mA, pulse measured

3.2 General AC characteristics

Table 5 General AC characteristics at T_A = 25 °C

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Transition frequency	f_T	–	80	–	GHz	V_{CE} = 1.8 V, I_C = 25 mA, f = 2 GHz
Collector base capacitance	C_{CB}		37		fF	V_{CB} = 1.8 V, V_{BE} = 0, f = 1 MHz, emitter grounded
Collector emitter capacitance	C_{CE}		0.40		pF	V_{CE} = 1.8 V, V_{BE} = 0, f = 1 MHz, base grounded
Emitter base capacitance	C_{EB}		0.41			V_{EB} = 0.4 V, V_{CB} = 0, f = 1 MHz, collector grounded

1 Maximum values not limited by the device but by the short cycle time of the 100% test

3.3 Frequency dependent AC characteristics

Measurement setup is a test fixture with Bias-T's in a 50 Ω system, T_A = 25 °C.

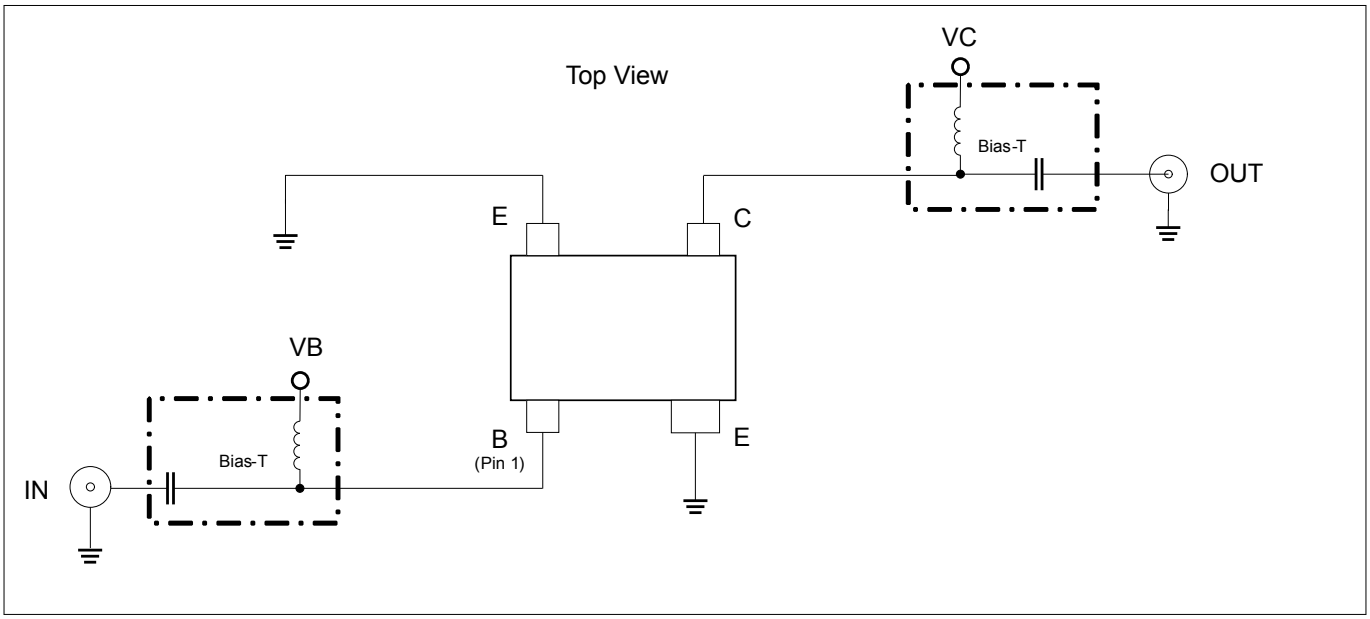

Figure 2 Testing circuit

Table 6 AC characteristics, V_{CE} = 1.8 V, f = 0.45 GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	–	33.5	–	dB	I_C = 10 mA
• Transducer gain	$\|S_{21}\|^2$		27.5			
Noise figure						
• Minimum noise figure	NF_{min}	–	0.6	–	dB	I_C = 5 mA
• Associated gain	G_{ass}		26.5			
Linearity						
• 3rd order intercept point at output	OIP_3	–	19.5	–	dBm	$Z_S = Z_L$ = 50 Ω, I_C = 10 mA
• 1 dB gain compression point at output	OP_{1dB}		4			

Electrical characteristics

Table 7 AC characteristics, V_{CE} = 1.8 V, f = 0.9 GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	–	30	–	dB	I_C = 10 mA
• Transducer gain	$\|S_{21}\|^2$		27			
Noise figure					dB	
• Minimum noise figure	NF_{min}	–	0.6	–		I_C = 5 mA
• Associated gain	G_{ass}		25.5			
Linearity						
• 3rd order intercept point at output	OIP_3	–	19.5	–	dBm	$Z_S = Z_L$ = 50 Ω, I_C = 10 mA
• 1 dB gain compression point at output	OP_{1dB}		4			

Table 8 AC characteristics, V_{CE} = 1.8 V, f = 1.5 GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	–	28	–	dB	I_C = 10 mA
• Transducer gain	$\|S_{21}\|^2$		25.5			
Noise figure					dB	
• Minimum noise figure	NF_{min}	–	0.65	–		I_C = 5 mA
• Associated gain	G_{ass}		24			
Linearity						
• 3rd order intercept point at output	OIP_3	–	19.5	–	dBm	$Z_S = Z_L$ = 50 Ω, I_C = 10 mA
• 1 dB gain compression point at output	OP_{1dB}		4			

Table 9 AC characteristics, V_{CE} = 1.8 V, f = 1.9 GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	–	27	–	dB	I_C = 10 mA
• Transducer gain	$\|S_{21}\|^2$		25			
Noise figure					dB	
• Minimum noise figure	NF_{min}	–	0.65	–		I_C = 5 mA
• Associated gain	G_{ass}		23			
Linearity						
• 3rd order intercept point at output	OIP_3	–	21	–	dBm	$Z_S = Z_L$ = 50 Ω, I_C = 10 mA
• 1 dB gain compression point at output	OP_{1dB}		4.5			

Table 10 AC characteristics, V_{CE} = 1.8 V, f = 2.4 GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	–	26	–	dB	I_C = 10 mA
• Transducer gain	$\|S_{21}\|^2$		24			
Noise figure					dB	
• Minimum noise figure	NF_{min}	–	0.7	–		I_C = 5 mA
• Associated gain	G_{ass}		22			
Linearity						
• 3rd order intercept point at output	OIP_3	–	21	–	dBm	$Z_S = Z_L$ = 50 Ω, I_C = 10 mA
• 1 dB gain compression point at output	OP_{1dB}		4			

Table 11 AC characteristics, V_{CE} = 1.8 V, f = 3.5 GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	–	24.5	–	dB	I_C = 10 mA
• Transducer gain	$\|S_{21}\|^2$		22			
Noise figure					dB	
• Minimum noise figure	NF_{min}	–	0.7	–		I_C = 5 mA
• Associated gain	G_{ass}		20			
Linearity						
• 3rd order intercept point at output	OIP_3	–	22.5	–	dBm	$Z_S = Z_L$ = 50 Ω, I_C = 10 mA
• 1 dB gain compression point at output	OP_{1dB}		5			

Table 12 AC characteristics, V_{CE} = 1.8 V, f = 5.5 GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	–	22.5	–	dB	I_C = 10 mA
• Transducer gain	$\|S_{21}\|^2$		18.5			
Noise figure					dB	
• Minimum noise figure	NF_{min}	–	0.85	–		I_C = 5 mA
• Associated gain	G_{ass}		17			
Linearity						
• 3rd order intercept point at output	OIP_3	–	22	–	dBm	$Z_S = Z_L$ = 50 Ω, I_C = 10 mA
• 1 dB gain compression point at output	OP_{1dB}		5			

Table 13 AC characteristics, V_{CE} = 1.8 V, f = 10 GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	–	17	–	dB	I_C = 10 mA
• Transducer gain	$\|S_{21}\|^2$		12			
Noise figure					dB	
• Minimum noise figure	NF_{min}	–	1.2	–		I_C = 5 mA
• Associated gain	G_{ass}		12.5			
Linearity						
• 3rd order intercept point at output	OIP_3	–	19.5	–	dBm	$Z_S = Z_L$ = 50 Ω, I_C = 10 mA
• 1 dB gain compression point at output	OP_{1dB}		2.5			

Table 14 AC characteristics, V_{CE} = 1.8 V, f = 12 GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	–	15.5	–	dB	I_C = 10 mA
• Transducer gain	$\|S_{21}\|^2$		9.5			
Noise figure					dB	
• Minimum noise figure	NF_{min}	–	1.45	–		I_C = 5 mA
• Associated gain	G_{ass}		11			
Linearity						
• 3rd order intercept point at output	OIP_3	–	18.5	–	dBm	$Z_S = Z_L$ = 50 Ω, I_C = 10 mA
• 1 dB gain compression point at output	OP_{1dB}		1.5			

Note: $G_{ms} = IS_{21} / S_{12}I$ for $k < 1$; $G_{ma} = IS_{21} / S_{12}\, I(k-(k^2-1)^{1/2})$ for $k > 1$. In order to get the NF_{min} values stated in this chapter, the test fixture losses have been subtracted from all measured results. OIP_3 value depends on termination of all intermodulation frequency components. Termination used for this measurement is 50 Ω from 0.2 MHz to 12 GHz.

3.4 Characteristic DC diagrams

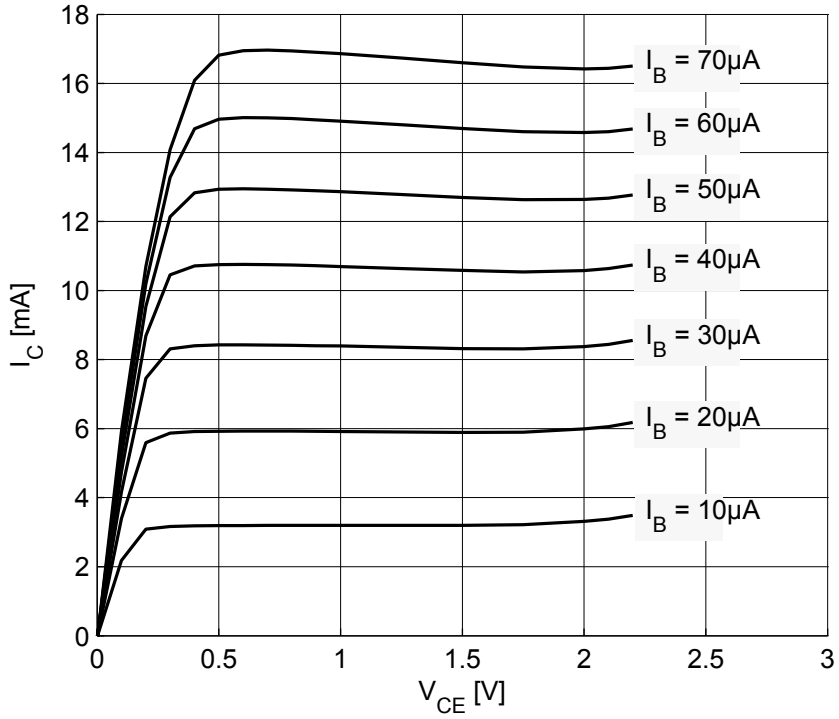

Figure 3 **Collector current vs. collector emitter voltage $I_C = f(V_{CE})$, I_B = parameter**

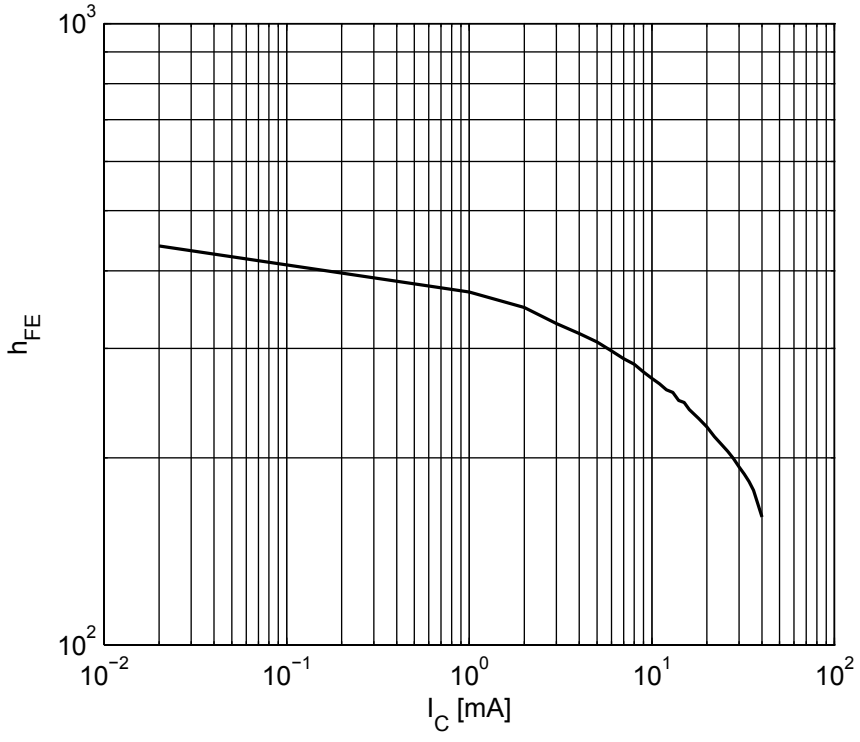

Figure 4 **DC current gain $h_{FE} = f(I_C)$, V_{CE} = 1.8 V**

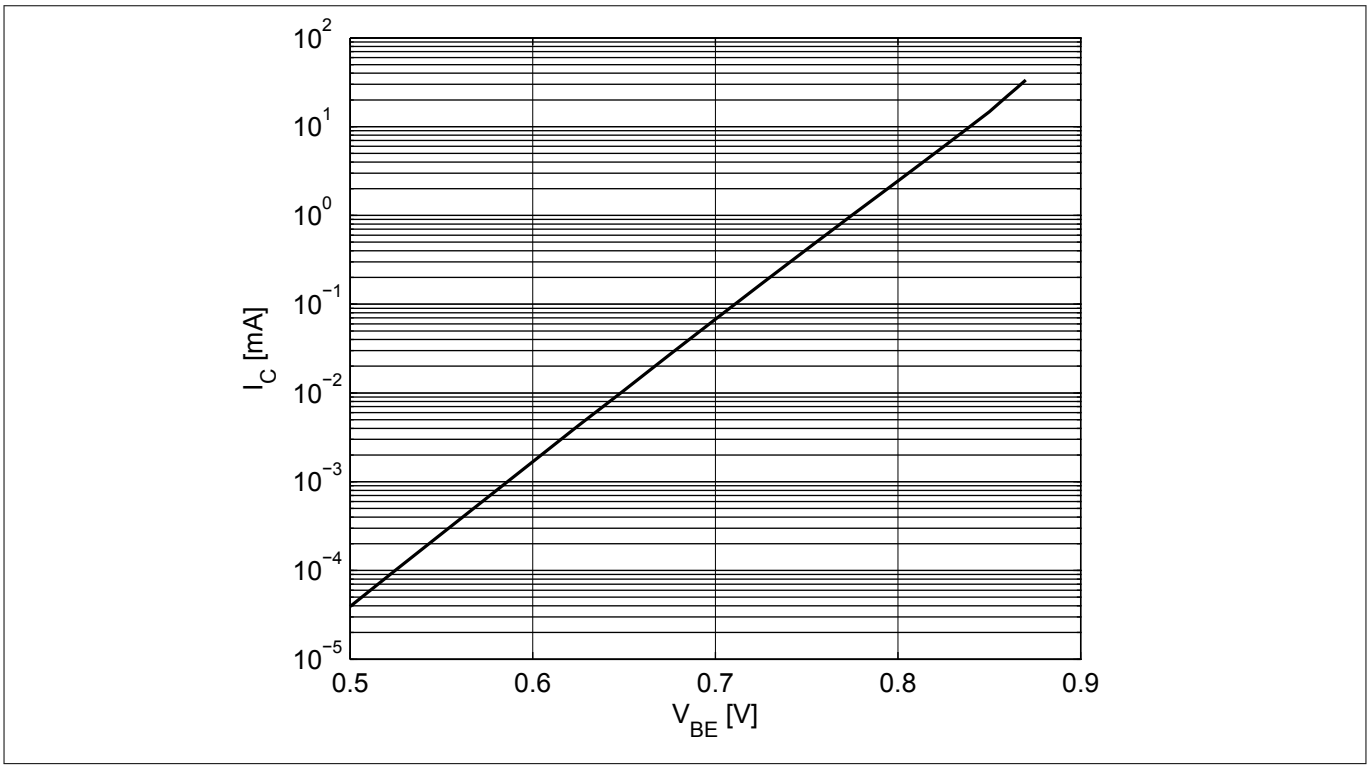

Figure 5 **Collector current vs. base emitter forward voltage $I_C = f(V_{BE})$, $V_{CE} = 1.8$ V**

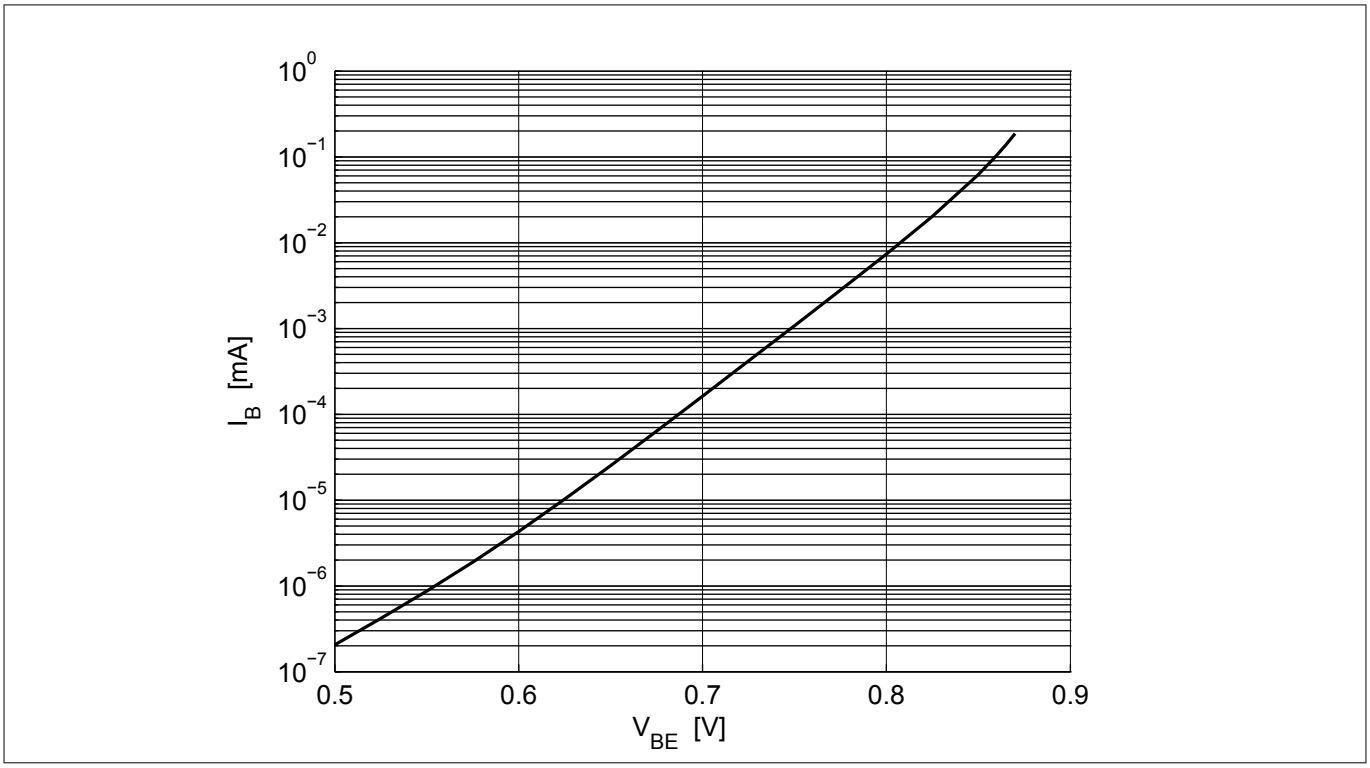

Figure 6 **Base current vs. base emitter forward voltage $I_B = f(V_{BE})$, $V_{CE} = 1.8$ V**

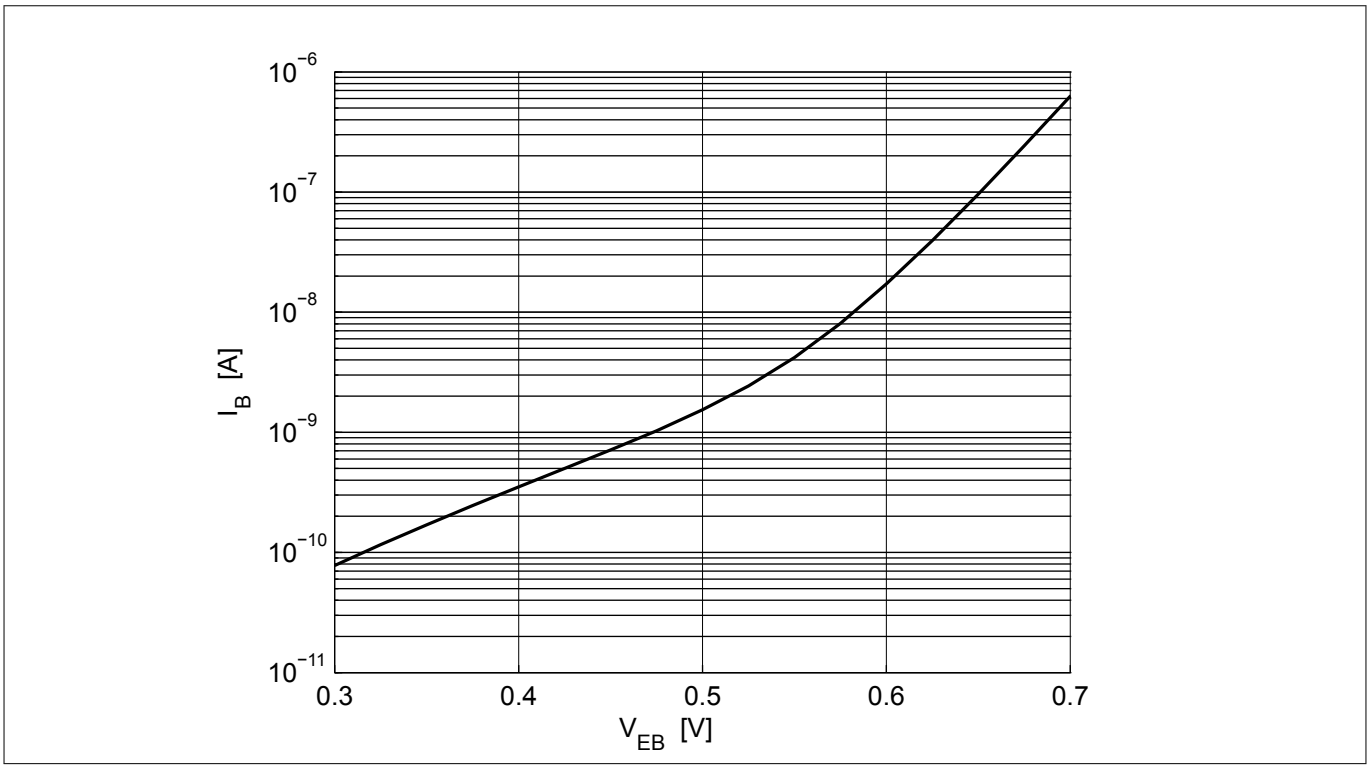

Figure 7 **Base current vs. base emitter reverse voltage $I_B = f(V_{EB})$, $V_{CE} = 1.8$ V**

3.5 Characteristic AC diagrams

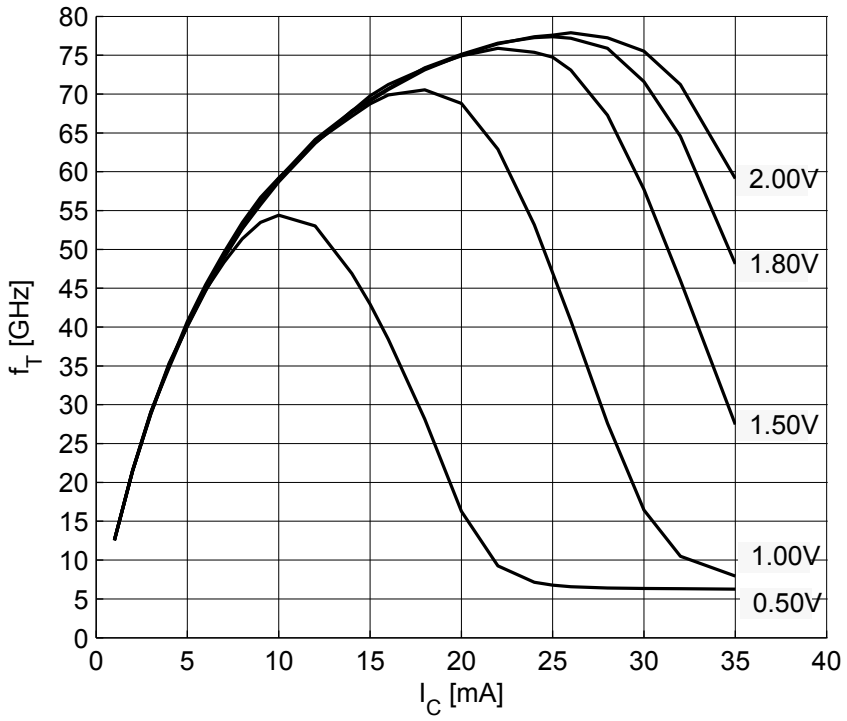

Figure 8 **Transition frequency $f_T = f(I_C)$, $f = 2$ GHz, V_{CE} = parameter**

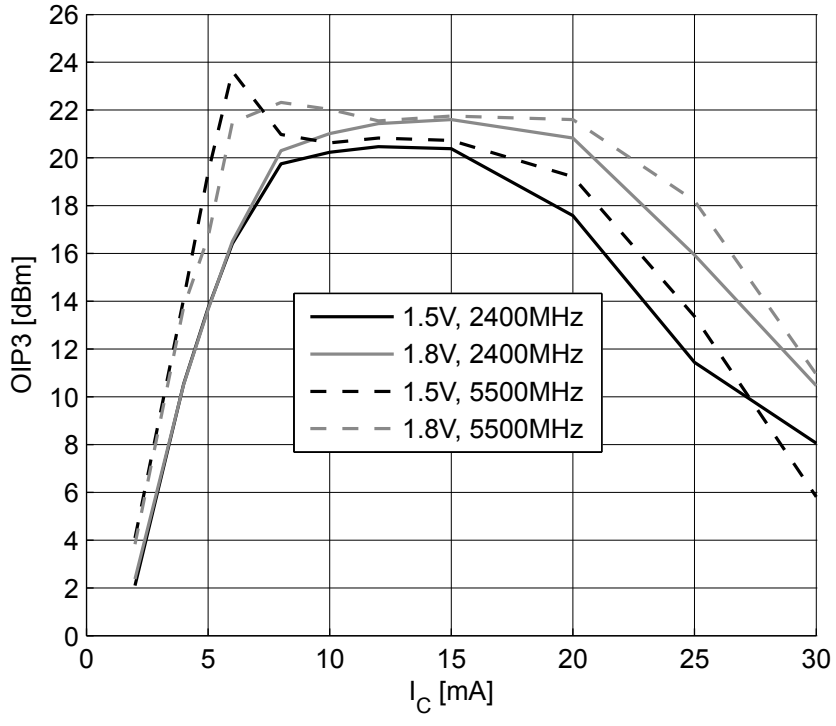

Figure 9 **3rd order intercept point at output $OIP_3 = f(I_C)$, $Z_S = Z_L = 50\ \Omega$, V_{CE}, f = parameters**

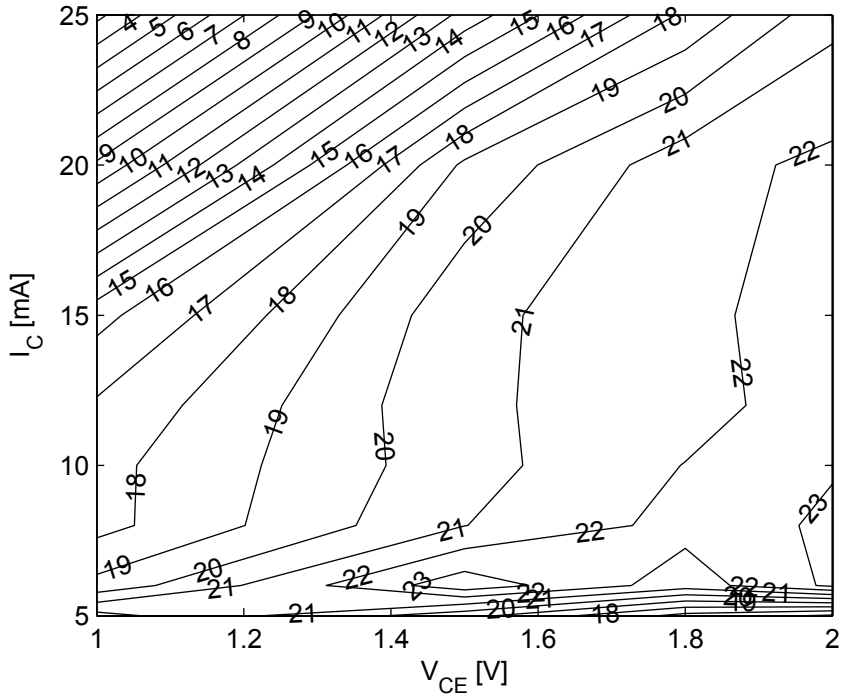

Figure 10 **3rd order intercept point at output OIP_3 [dBm] = f(I_C, V_{CE}), Z_S = Z_L= 50 Ω, f = 5.5 GHz**

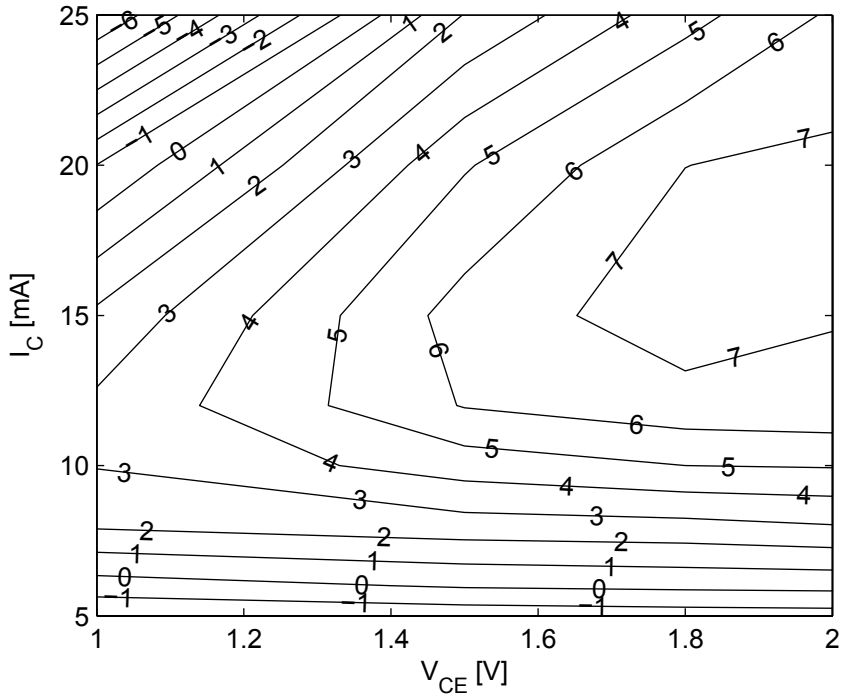

Figure 11 **Compression point at output OP_{1dB} [dBm] = f(I_C, V_{CE}), Z_S = Z_L= 50 Ω, f = 5.5 GHz**

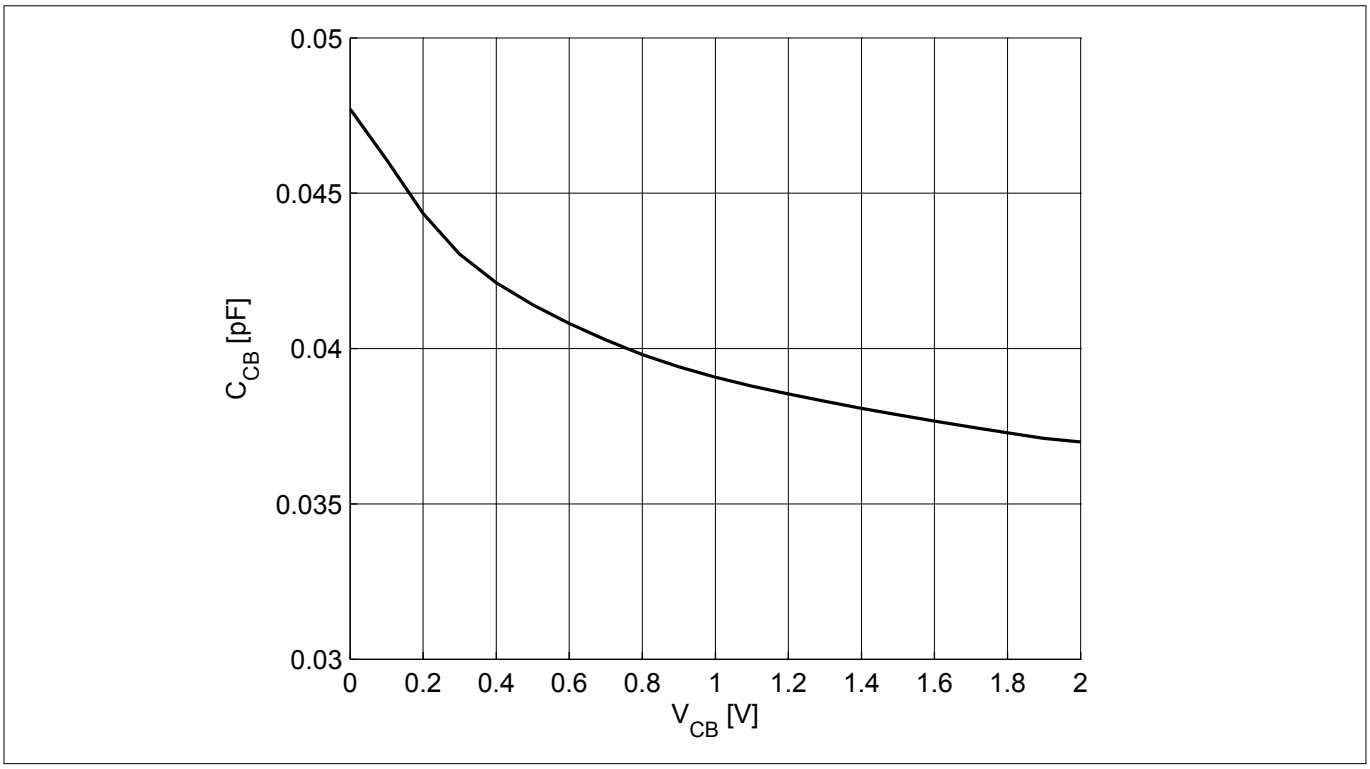

Figure 12 **Collector base capacitance C_{CB} = f(V_{CB}), f = 1 MHz**

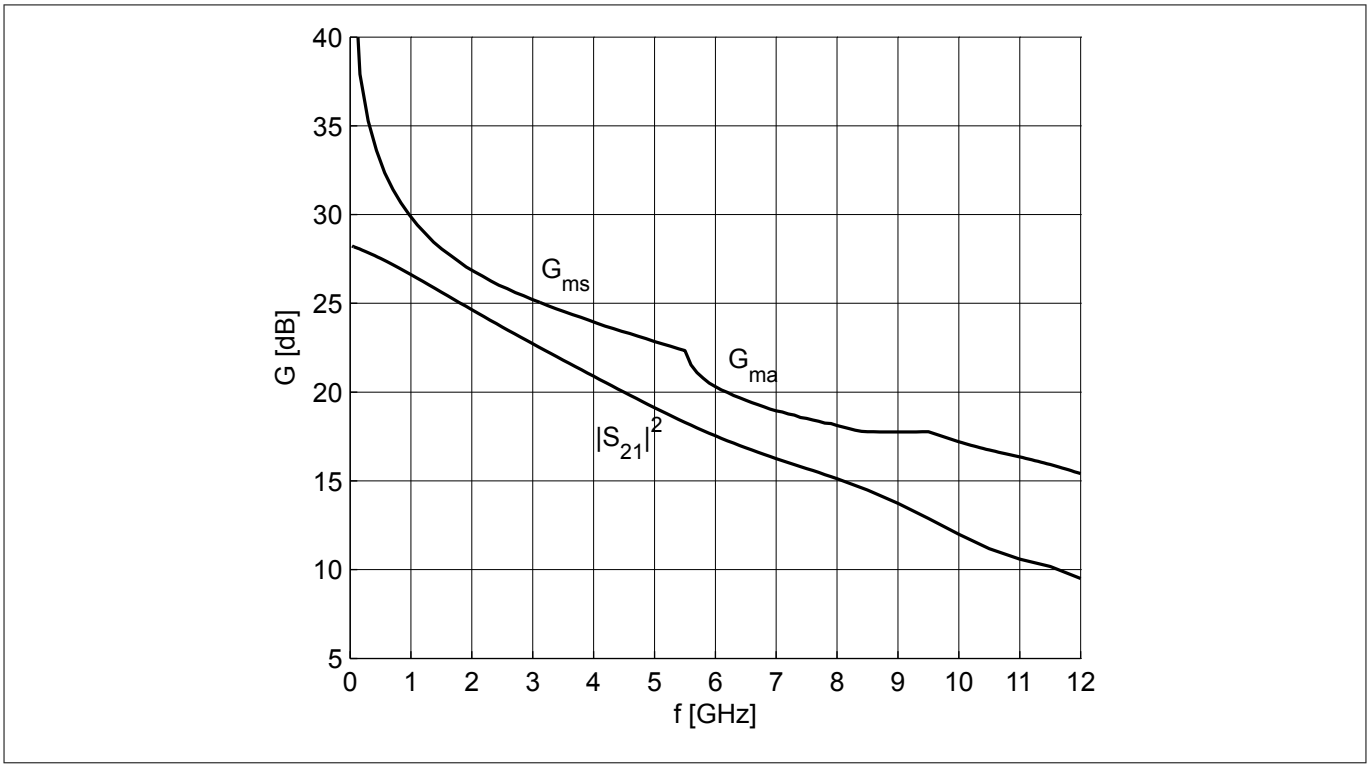

Figure 13 **Gain G_{ma}, G_{ms}, $|S_{21}|^2$ = f(f), V_{CE} = 1.8 V, I_C = 10 mA**

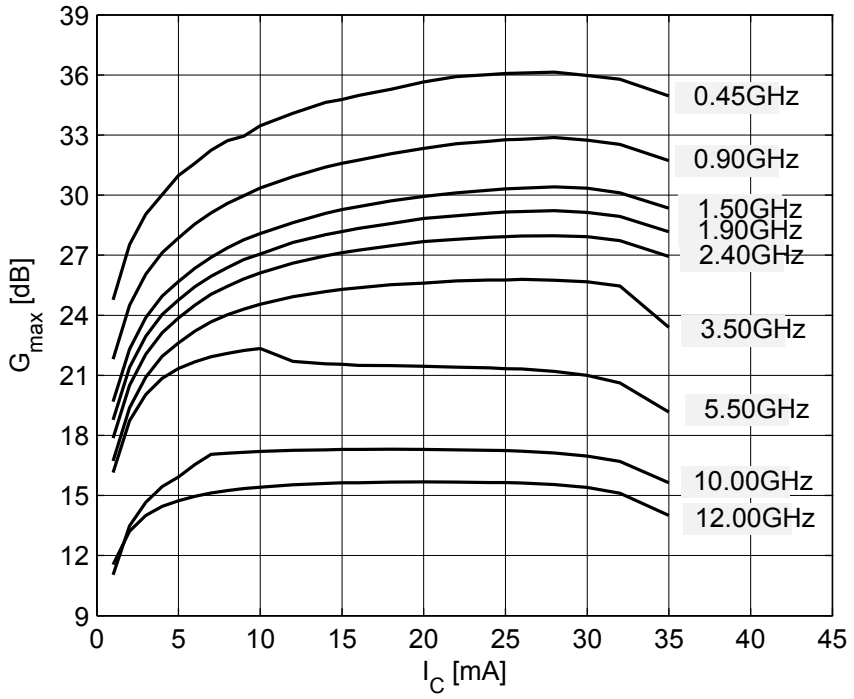

Figure 14 **Maximum power gain G_{max} = f(I_C), V_{CE} = 1.8 V, f = parameter in GHz**

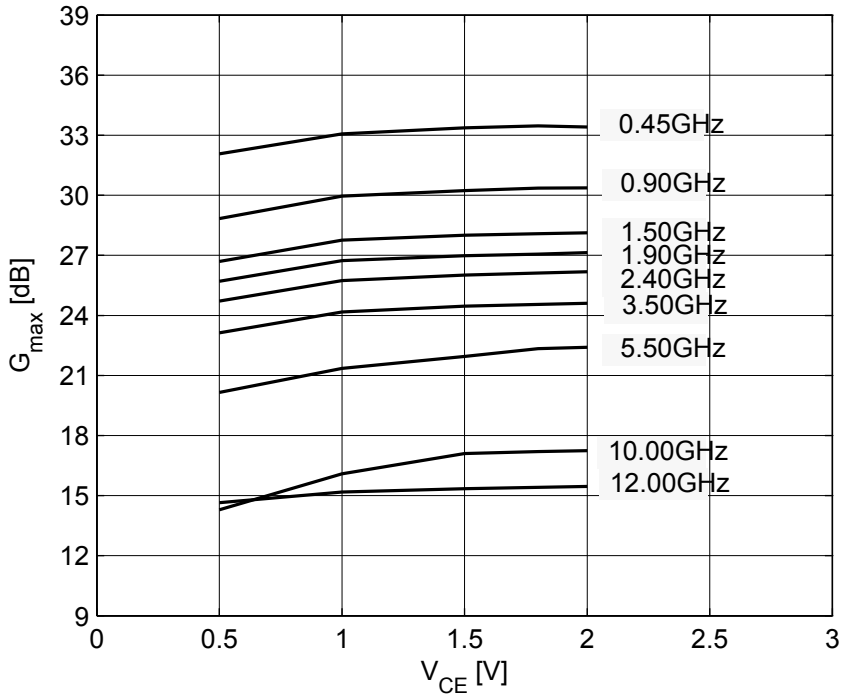

Figure 15 **Maximum power gain G_{max} = f(V_{CE}), I_C = 10 mA, f = parameter in GHz**

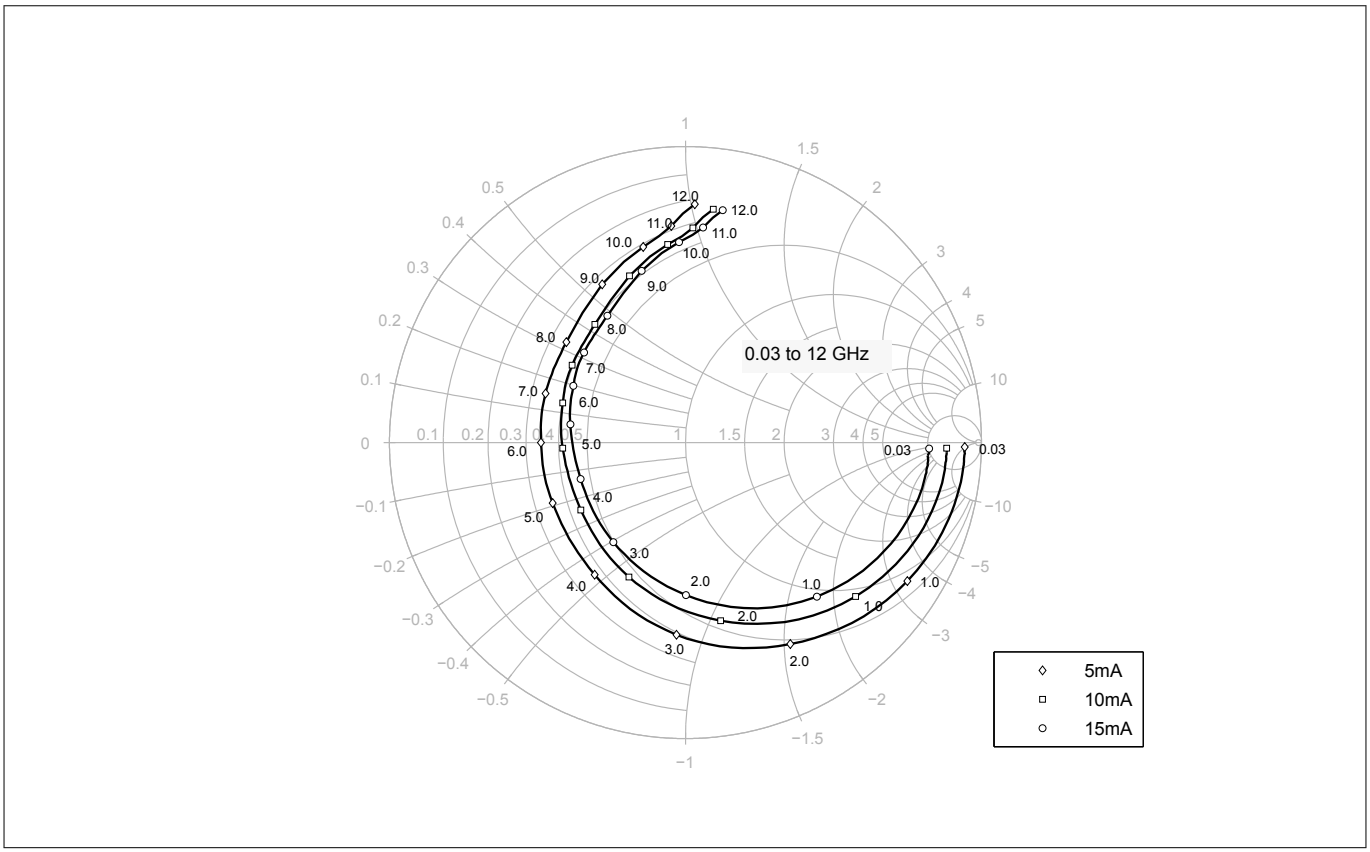

Figure 16 **Input reflection coefficient S_{11} = f(f), V_{CE} = 1.8 V, I_C = 5 / 10 / 15 mA**

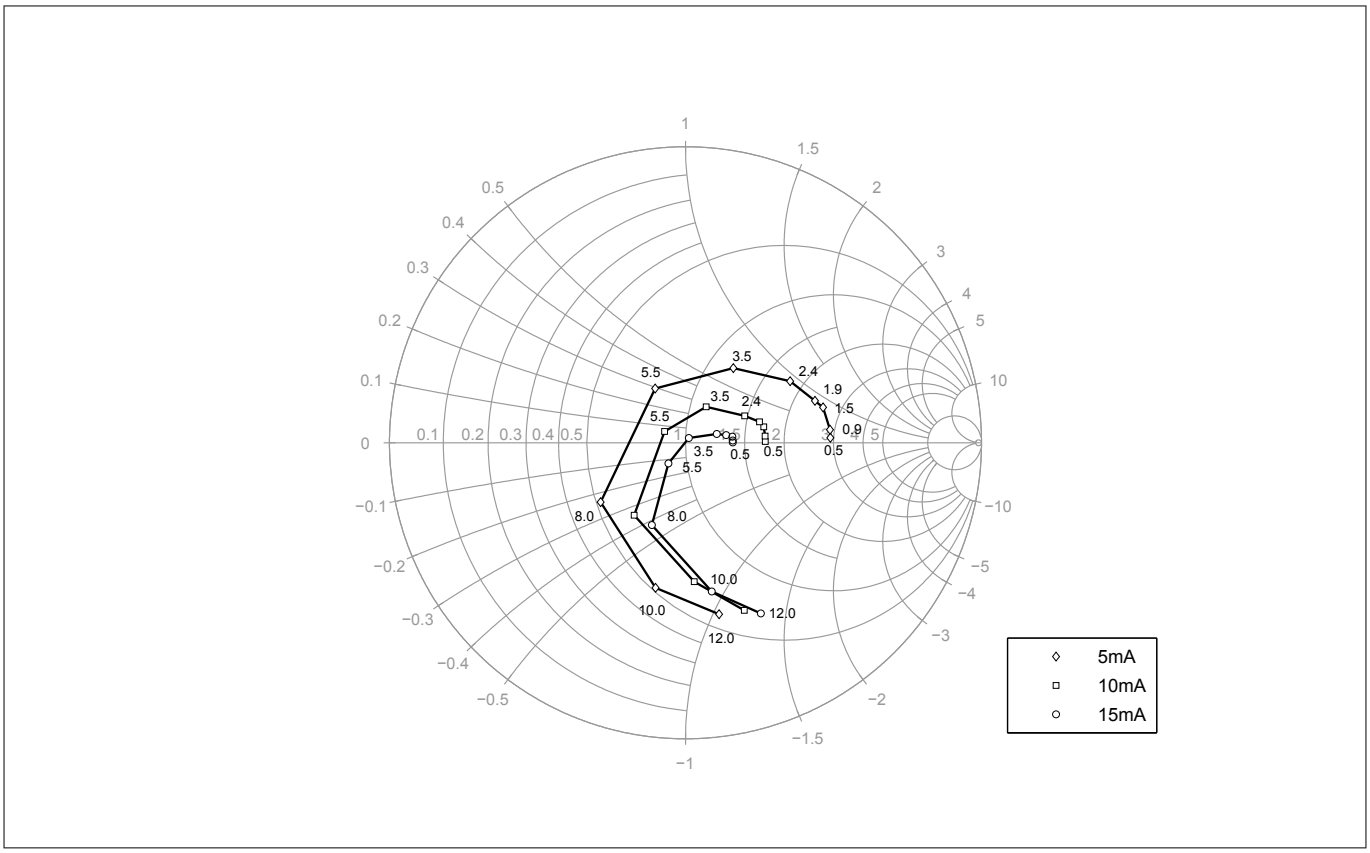

Figure 17 **Source impedance for minimum noise figure $Z_{S,opt}$ = f(f), V_{CE} = 1.8 V, I_C = 5 / 10 / 15 mA**

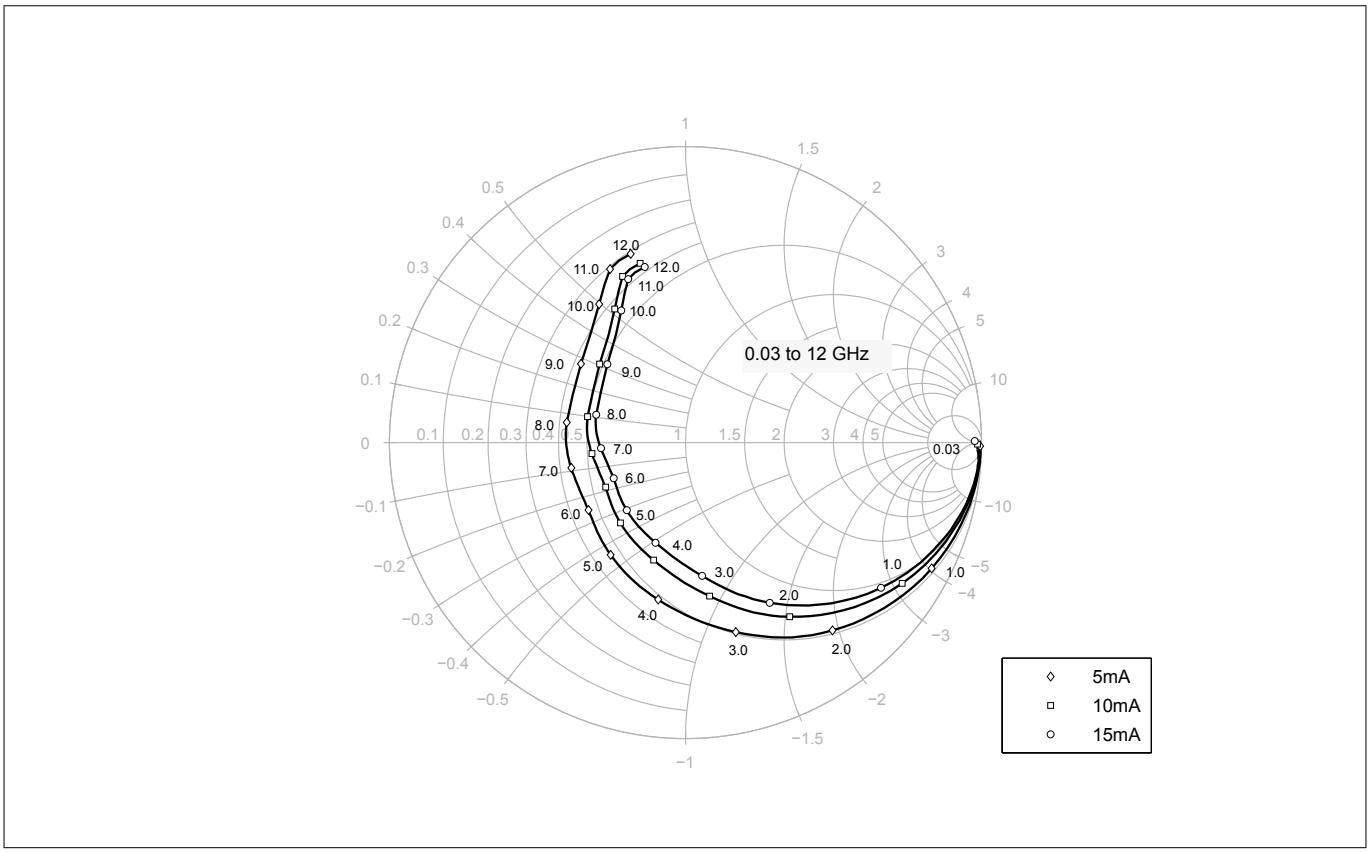

Figure 18 **Output reflection coefficient S_{22} = f(f), V_{CE} = 1.8 V, I_C = 5 / 10 / 15 mA**

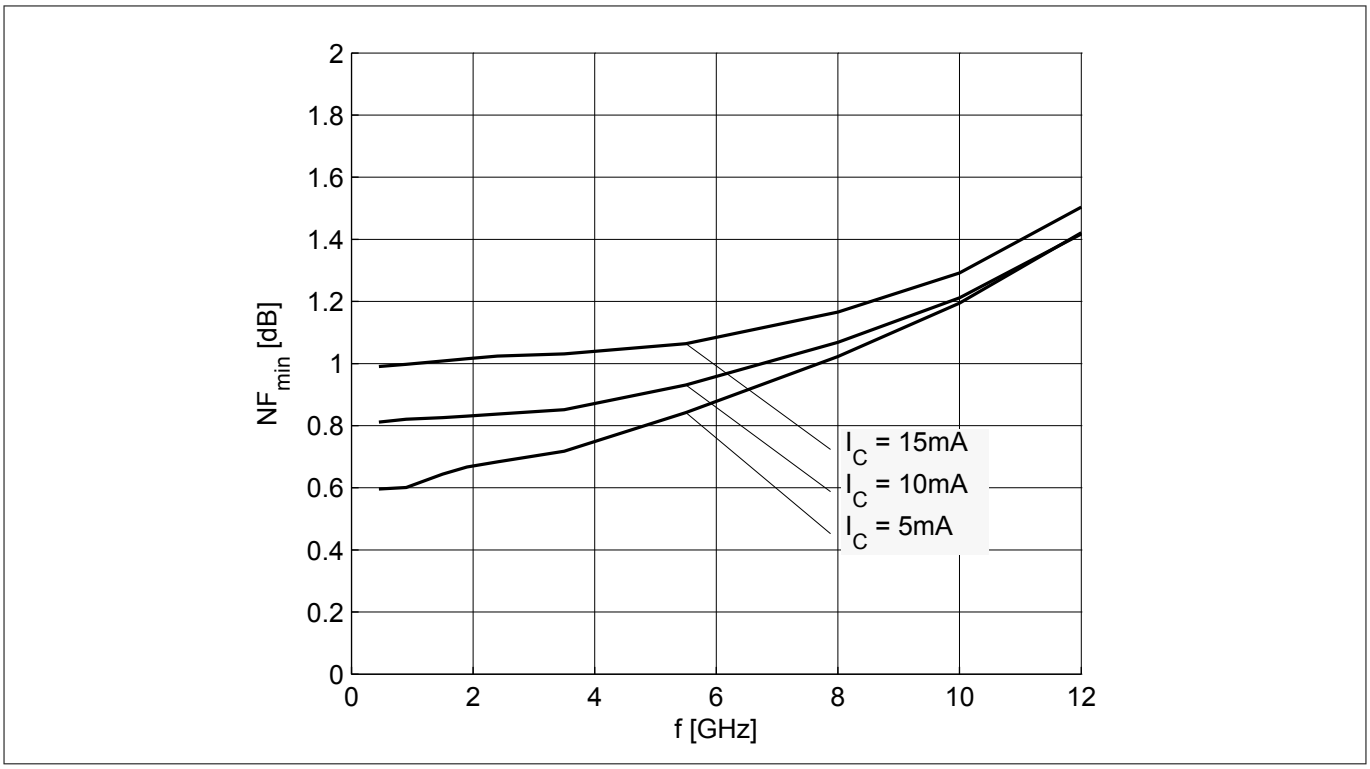

Figure 19 **Noise figure NF_{min} = f(f), V_{CE} = 1.8 V, Z_S = $Z_{S,opt}$, I_C = 5 / 10 / 15 mA**

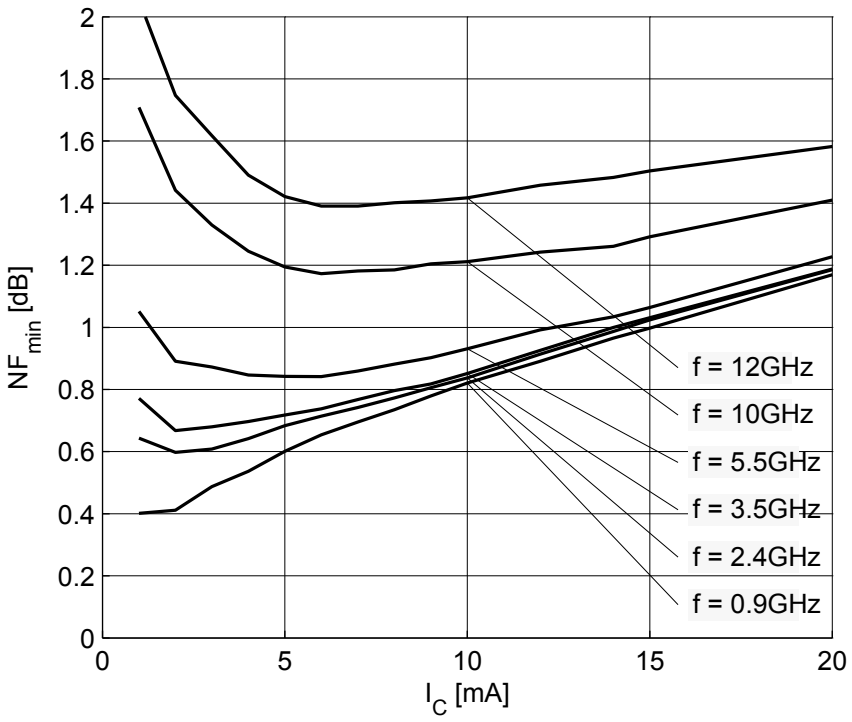

Figure 20 **Noise figure NF_{min} = f(I_C), V_{CE} = 1.8 V, Z_S = Z_{opt}, f = parameter in GHz**

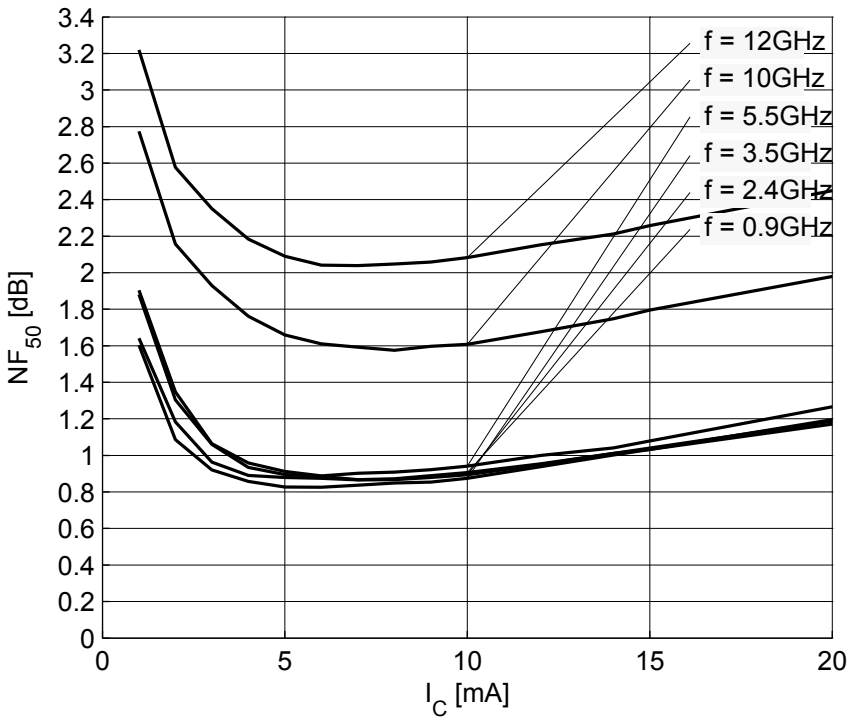

Figure 21 **Noise figure NF_{50} = f(I_C), V_{CE} = 1.8 V, Z_S = 50 Ω, f = parameter in GHz**

Note: The curves shown in this chapter have been generated using typical devices but shall not be considered as a guarantee that all devices have identical characteristic curves. T_A = 25 °C.

4 Package information SOT343

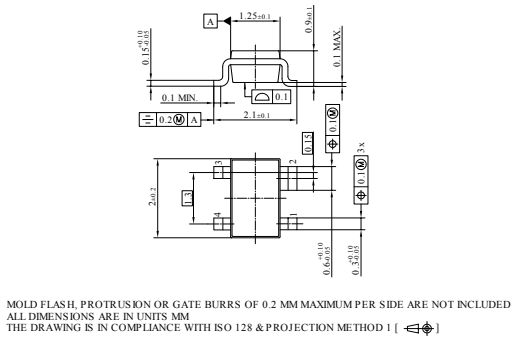

Figure 22 Package outline

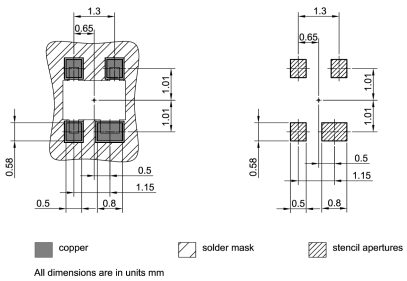

Figure 23 Foot print

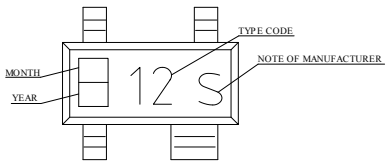

Figure 24 Marking layout example

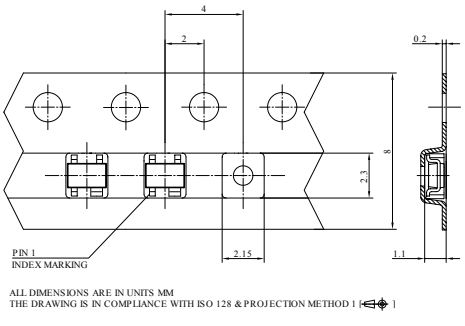

Figure 25 Tape dimensions

Revision history

Document version	Date of release	Description of changes
2.0	2018-09-26	New datasheet layout.

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2018-09-26

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2018 Infineon Technologies AG

All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-kyv1515503149194

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffenheitsgarantie”) .

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer’s compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer’s products and any use of the product of Infineon Technologies in customer’s applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer’s technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies’ products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Bipolar Transistors ***category:***

Click to view products by Infineon ***manufacturer:***

Other Similar products are found below :

MAPRST0912-50 MCH4016-TL-H MMBT5551-G MRF10120 15GN01CA-TB-E PH1214-25M MAPRST0912-350 MMBTH10-TP BFP 640F H6327 BFR 360F H6765 MRF10031 NSVF4009SG4T1G BFP 182R E7764 BFP405H6740XTSA1 MRF10350 ASMA201 BFR360FH6765XTSA1 BFP410H6327XTSA1 BFP620FH7764XTSA1 BFP720ESDH6327XTSA1 BFP720FH6327XTSA1 BFR360L3E6765XTMA1 BFP420H6433XTMA1 BFP420H6740XTSA1 BFP420H6801XTSA1 MCH4015-TL-H BF888H6327XTSA1 MMBT2222A-G BFP196WH6327XTSA1 BFP405FH6327XTSA1 BFP640ESDH6327XTSA1 BFR193L3E6327XTMA1 BFS483H6327XTSA1 NSVF4020SG4T1G NSVF6003SB6T1G MRF10005 BFP420FH6327XTSA1 BFP740FESDH6327XTSA1 BFR181E6327HTSA1 BFR181WH6327XTSA1 BFR182E6327HTSA1 BFR193E6327HTSA1 BFP181E7764HTSA1 BFP183WH6327XTSA1 BFP720H6327XTSA1 BFR182WH6327XTSA1 BFU590GX MAPR-000912-500S00 BFR340FH6327XTSA1 STGWT30HP65FB