

Data Sheet

Total Power: 3 W
Input Voltage: 12, 24 or 48 V
of Outputs: Single and Dual

SPECIAL FEATURES

- Ultra compact DIP and SMD package
23.8 x 13.7 x 8.0 mm
(0.94 x 0.54 x 0.31 inches)
- Efficiency up to 80%
- I/O-isolation 1500 VDC
- Ultra-wide 4:1 input range
- Operating temperature range
-40 °C to +85 °C
- Remote ON/OFF control
- Input filter meets EN 55022, class A
and FCC, level A
- 3 year product warranty
- CSA/UL/IEC/EN 60950-1 Safety
Approval
- Qualified for lead-free reflow solder
process according to IPC/JEDEC
J-STD-020D (for SMD Package)

SAFETY

- UL/cUL 60950-1 recognition (CSA
certificate)
- IEC/EN 60950-1 (CB-scheme)



Electrical Specifications

Input	
Input range	9 - 36 Vdc, 18 - 75 Vdc
Efficiency	80% @ 24 Vo
Output	
Voltage tolerance	±2.0%
Line regulation	1.0%
Load regulation	1.2%
Noise/ripple	100 mV
Overload protection	150% typ of Io max, foldback
Short circuit protection	Hiccup mode
Switching frequency	350 KHz
Isolation	
I/O isolation	I/O: 1500 Vdc
Insulation resistance	1000 Mohm
Insulation capacitance	500 pF

Environmental Specifications


Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-50 °C to +125 °C
Humidity	5% to 95% non-condensing
MTBF	300 Khrs calculated

Ordering Information

Part Number	Input Voltage	Output Voltage	Output Current	Efficiency	Power
ATA00F18-L	9-36 Vdc	3.3 V	600 mA	75%	2 W
ATA00A18-L	9-36 Vdc	5 V	600 mA	78%	3 W
ATA00B18-L	9-36 Vdc	12 V	250 mA	80%	3 W
ATA00C18-L	9-36 Vdc	15 V	200 mA	80%	3 W
ATA00H18-L	9-36 Vdc	24 V	125 mA	80%	3 W
ATA00AA18-L	9-36 Vdc	+/-5 V	300 mA	77%	3 W
ATA00BB18-L	9-36 Vdc	+/-12 V	125 mA	80%	3 W
ATA00CC18-L	9-36 Vdc	+/-15 V	100 mA	80%	3 W
ATA00F36-L	18-75 Vdc	3.3 V	600 mA	75%	2 W
ATA00A36-L	18-75 Vdc	5 V	600 mA	78%	3 W
ATA00B36-L	18-75 Vdc	12 V	250 mA	80%	3 W
ATA00C36-L	18-75 Vdc	15 V	200 mA	80%	3 W
ATA00H36-L	18-75 Vdc	24 V	125 mA	80%	3 W
ATA00AA36-L	18-75 Vdc	+/-5 V	300 mA	77%	3 W
ATA00BB36-L	18-75 Vdc	+/-12 V	125 mA	80%	3 W
ATA00CC36-L	18-75 Vdc	+/-15 V	100 mA	80%	3 W
ATA00F18S-L	9-36 Vdc	3.3 V	600 mA	75%	2 W
ATA00A18S-L	9-36 Vdc	5 V	600 mA	78%	3 W
ATA00B18S-L	9-36 Vdc	12 V	250 mA	80%	3 W
ATA00C18S-L	9-36 Vdc	15 V	200 mA	80%	3 W
ATA00H18S-L	9-36 Vdc	24 V	125 mA	80%	3 W
ATA00AA18S-L	9-36 Vdc	+/-5 V	300 mA	77%	3 W
ATA00BB18S-L	9-36 Vdc	+/-12 V	125 mA	80%	3 W
ATA00CC18S-L	9-36 Vdc	+/-15 V	100 mA	80%	3 W
ATA00F36S-L	18-75 Vdc	3.3 V	600 mA	75%	2 W
ATA00A36S-L	18-75 Vdc	5 V	600 mA	78%	3 W
ATA00B36S-L	18-75 Vdc	12 V	250 mA	80%	3 W
ATA00C36S-L	18-75 Vdc	15 V	200 mA	80%	3 W
ATA00H36S-L	18-75 Vdc	24 V	125 mA	80%	3 W
ATA00AA36S-L	18-75 Vdc	+/-5 V	300 mA	77%	3 W
ATA00BB36S-L	18-75 Vdc	+/-12 V	125 mA	80%	3 W
ATA00CC36S-L	18-75 Vdc	+/-15 V	100 mA	80%	3 W


Mechanical Dimensions

ATAxxx-L (DIP)

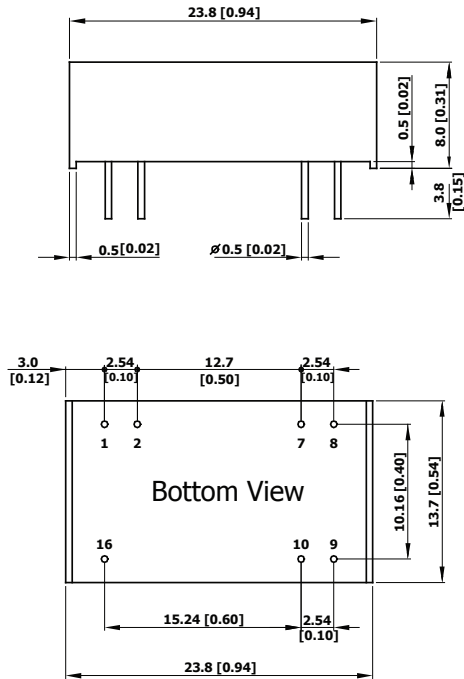

- All dimensions in mm (inches)
- Tolerance: X.X±0.25 (X.XX±0.01)
X.XX±0.13 (X.XXX±0.005)
- Pin pitch tolerance: ±0.25 (±0.01)
- Pin dimension tolerance: ±0.1 (±0.004)

ATAxxxS-L (SMD)

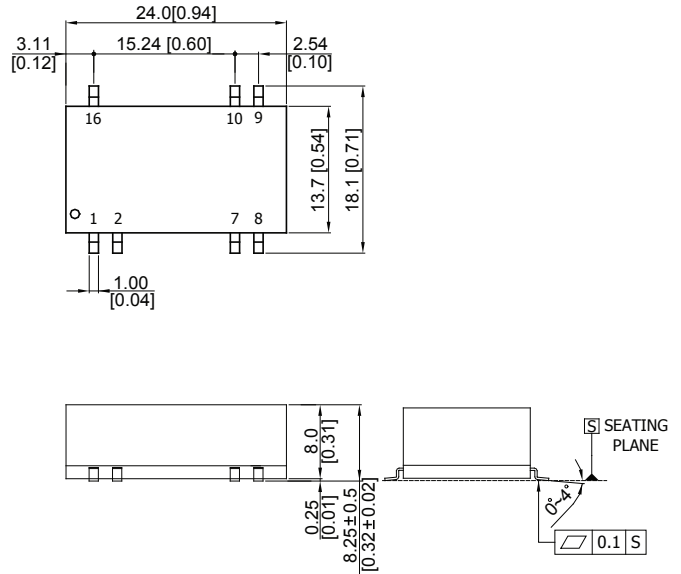

Pin Connections		
Pin	Single Output	Dual Output
1	-Vin	-Vin
2	Remote On/Off	Remote On/Off
7	NC	NC
8	NC	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN
EMBEDDED TECHNOLOGIES

www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2015 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Artesyn Embedded Technologies](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [PSR152.5-7IR](#) [Q48T30020-NBB0](#) [AVO240-48S12B-6L](#) [AVO250-48S28B-6L](#) [NAN-0505](#) [HW-L16D](#) [JAHW100Y1](#) [217-1617-001](#) [22827](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#) [CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [PSE1000DCDC-12V](#) [RDS180245](#) [MAU228](#) [419-2065-201](#) [449-2075-101](#) [TME 0303S](#) [TME 0505S](#) [TME 1205S](#) [TME 1212S](#) [TME 2405S](#) [TME 2412S](#) [J80-0041NL](#) [V300C24C150BG](#) [419-2062-200](#) [419-2063-401](#) [419-2067-101](#) [419-2067-501](#) [419-2068-001](#) [DCG40-5G](#) [DFC15U48D15](#) [449-2067-000](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [033456](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#)