

BFP843F

SiGe:C NPN RF bipolar transistor



Order now



Technical documents



Simulation



Support

Product description

The BFP843F is a robust low noise broadband pre-matched RF heterojunction bipolar transistor (HBT).



Feature list

- Unique combination of high end RF performance and robustness: 20 dBm maximum RF input power, 1.5 kV HBM ESD hardness
- High transition frequency to enable best in class noise performance at high frequencies:
 $NF_{min} = 1.1$ dB at 5.5 GHz, 1.8 V, 8 mA
- High gain $G_{ma} = 18$ dB at 5.5 GHz, 1.8 V, 15 mA
- $OIP_3 = 19.5$ dBm at 5.5 GHz, 1.8 V, 15 mA
- Suitable for low voltage applications e.g. $V_{CC} = 1.2$ V and 1.8 V (2.85 V, 3.3 V, 3.6 V require a corresponding collector resistor)

Product validation

Qualified for industrial applications according to the relevant tests of JEDEC47/20/22.

Potential applications

- WLAN, WiMAX and UWB
- Satellite communication systems: satellite radio (SDARs, DAB) and navigation systems (e.g. GPS, GLONASS, BeiDou, Galileo)

Device information

Table 1 Part information

| Product name / Ordering code | Package | Pin configuration | | | | Marking | Pieces / Reel |
|------------------------------|----------|-------------------|-------|-------|-------|---------|---------------|
| BFP843F / BFP843FH6327XTSA1 | TSFP-4-1 | 1 = B | 2 = E | 3 = C | 4 = E | T2s | 3000 |

Attention: ESD (Electrostatic discharge) sensitive device, observe handling precautions

Table of contents

| | | |
|----------|--|----|
| | Product description | 1 |
| | Feature list | 1 |
| | Product validation | 1 |
| | Potential applications | 1 |
| | Device information | 1 |
| | Table of contents | 2 |
| 1 | Absolute maximum ratings | 3 |
| 2 | Thermal characteristics | 4 |
| 3 | Electrical characteristics | 5 |
| 3.1 | DC characteristics | 5 |
| 3.2 | General AC characteristics | 5 |
| 3.3 | Frequency dependent AC characteristics | 6 |
| 3.4 | Characteristic DC diagrams | 10 |
| 3.5 | Characteristic AC diagrams | 13 |
| 4 | Package information TSFP-4-1 | 19 |
| | Revision history | 20 |
| | Disclaimer | 21 |

Absolute maximum ratings

1 Absolute maximum ratings

Table 2 Absolute maximum ratings at $T_A = 25\text{ °C}$ (unless otherwise specified)

| Parameter | Symbol | Values | | Unit | Note or test condition |
|---|------------|--------|------|------|--|
| | | Min. | Max. | | |
| Collector emitter voltage | V_{CEO} | - | 2.25 | V | Open base |
| | | | 2.0 | | $T_A = -55\text{ °C}$, open base |
| Collector emitter voltage ¹⁾ | V_{CES} | | 2.25 | | E-B short circuited |
| | | | 2.0 | | $T_A = -55\text{ °C}$, E-B short circuited |
| Collector base voltage ²⁾ | V_{CBO} | | 2.9 | | Open emitter |
| | | | 2.6 | | $T_A = -55\text{ °C}$, open emitter |
| Base current | I_B | -5 | 5 | mA | - |
| Collector current | I_C | - | 55 | | |
| RF input power | P_{RFIn} | | 20 | dBm | |
| ESD stress pulse | V_{ESD} | -1.5 | 1.5 | kV | HBM, all pins, acc. to JESD22-A114 |
| Total power dissipation ³⁾ | P_{tot} | - | 125 | mW | $T_S \leq 100\text{ °C}$ |
| Junction temperature | T_J | | 150 | °C | - |
| Storage temperature | T_{Stg} | -55 | | | |

Attention: Stresses above the max. values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Exceeding only one of these values may cause irreversible damage to the integrated circuit.

¹ V_{CES} is identical to V_{CEO} due to design.

² V_{CBO} is similar to V_{CEO} due to design.

³ T_S is the soldering point temperature. T_S is measured on the emitter lead at the soldering point of the PCB.

Thermal characteristics

2 Thermal characteristics

Table 3 Thermal resistance

| Parameter | Symbol | Values | | | Unit | Note or test condition |
|----------------------------|------------|--------|------|------|------|------------------------|
| | | Min. | Typ. | Max. | | |
| Junction - soldering point | R_{thJS} | - | 395 | - | K/W | - |

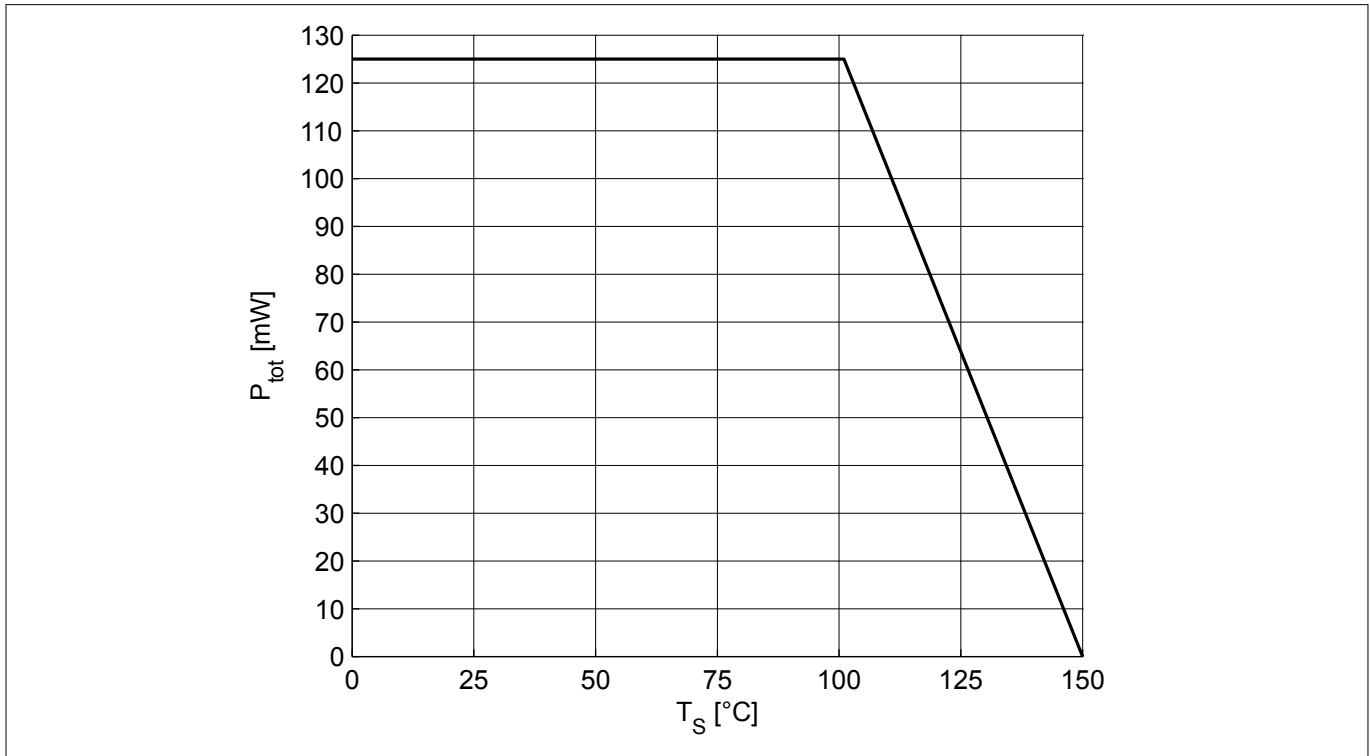


Figure 1 Total power dissipation $P_{tot} = f(T_S)$

Electrical characteristics

3 Electrical characteristics

3.1 DC characteristics

Table 4 DC characteristics at $T_A = 25\text{ °C}$

| Parameter | Symbol | Values | | | Unit | Note or test condition |
|-------------------------------------|---------------|--------|------|-------------------|---------------|---|
| | | Min. | Typ. | Max. | | |
| Collector emitter breakdown voltage | $V_{(BR)CEO}$ | 2.25 | 2.6 | – | V | $I_C = 1\text{ mA}$, $I_B = 0$, open base |
| Collector emitter leakage current | I_{CES} | – | – | 400 ¹⁾ | nA | $V_{CE} = 1.5\text{ V}$, $V_{BE} = 0$, E-B short circuited |
| Collector base leakage current | I_{CBO} | – | – | 400 ¹⁾ | nA | $V_{CB} = 1.5\text{ V}$, $I_E = 0$, open emitter |
| Emitter base leakage current | I_{EBO} | – | – | 10 ¹⁾ | μA | $V_{EB} = 0.5\text{ V}$, $I_C = 0$, open collector |
| DC current gain | h_{FE} | 150 | 260 | 450 | | $V_{CE} = 1.8\text{ V}$, $I_C = 15\text{ mA}$, pulse measured |

3.2 General AC characteristics

Table 5 General AC characteristics at $T_A = 25\text{ °C}$

| Parameter | Symbol | Values | | | Unit | Note or test condition |
|--|----------|--------|--------------|------|------|---|
| | | Min. | Typ. | Max. | | |
| Collector base capacitance ²⁾ | C_{CB} | – | 5.23 0.06 | – | pF | $f = 1\text{ MHz}$ $f = 1\text{ GHz}$ $V_{CB} = 1.8\text{ V}$, $V_{BE} = 0$, emitter grounded |
| Collector emitter capacitance | C_{CE} | – | 0.46 | – | pF | $f = 1\text{ MHz}$, $V_{CE} = 1.8\text{ V}$, $V_{BE} = 0$, base grounded |
| Emitter base capacitance | C_{EB} | – | 0.7 | – | pF | $f = 1\text{ MHz}$, $V_{EB} = 0.4\text{ V}$, $V_{CB} = 0$, collector grounded |

¹ Maximum values not limited by the device but by the short cycle time of the 100% test

² Including integrated feedback capacitance

Electrical characteristics

3.3 Frequency dependent AC characteristics

Measurement setup is a test fixture with Bias-T's in a 50 Ω system, $T_A = 25\text{ °C}$.

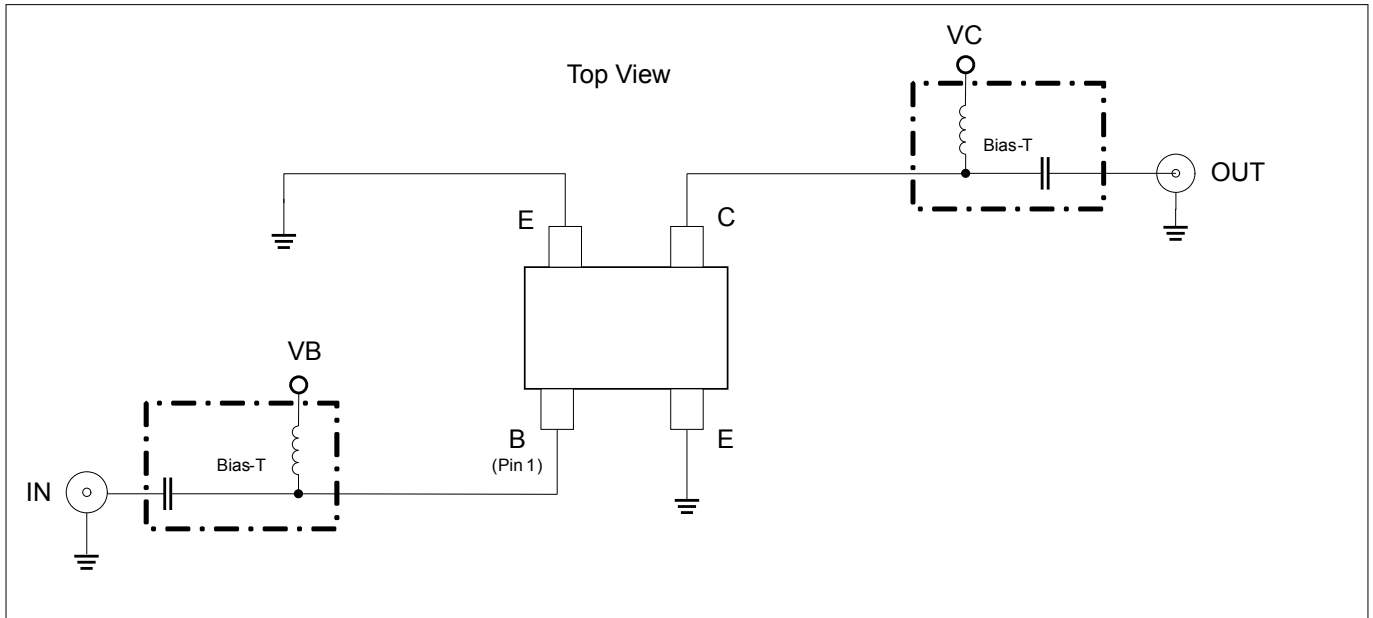


Figure 2 Testing circuit

Table 6 AC characteristics, $V_{CE} = 1.8\text{ V}$, $f = 450\text{ MHz}$

| Parameter | Symbol | Values | | | Unit | Note or test condition |
|--|--------------------------|--------|-------------|------|------|---|
| | | Min. | Typ. | Max. | | |
| Power gain | | - | | - | dB | $I_C = 15\text{ mA}$ |
| <ul style="list-style-type: none"> Maximum power gain Transducer gain | G_{ma} $ S_{21} ^2$ | | 25 24.5 | | | |
| Noise figure | | | | | dBm | $I_C = 8\text{ mA}$ |
| <ul style="list-style-type: none"> Minimum noise figure Associated gain | NF_{min} G_{ass} | | 0.8 22.5 | | | |
| Linearity | | | | | dBm | $Z_S = Z_L = 50\text{ }\Omega$, $I_C = 15\text{ mA}$ |
| <ul style="list-style-type: none"> 3rd order intercept point at output 1 dB gain compression point at output | OIP_3 OP_{1dB} | | 24.5 7 | | | |

Electrical characteristics

Table 7 AC characteristics, $V_{CE} = 1.8\text{ V}$, $f = 900\text{ MHz}$

| Parameter | Symbol | Values | | | Unit | Note or test condition |
|--|--------------------------|--------|----------------|------|------|---|
| | | Min. | Typ. | Max. | | |
| Power gain | | - | | - | dB | $I_C = 15\text{ mA}$ |
| <ul style="list-style-type: none"> Maximum power gain Transducer gain | G_{ma} $ S_{21} ^2$ | | 24.5 24 | | | |
| Noise figure | | | | | | $I_C = 8\text{ mA}$ |
| <ul style="list-style-type: none"> Minimum noise figure Associated gain | NF_{min} G_{ass} | | 0.8 22 | | | |
| Linearity | | | | | dBm | $Z_S = Z_L = 50\ \Omega$, $I_C = 15\text{ mA}$ |
| <ul style="list-style-type: none"> 3rd order intercept point at output 1 dB gain compression point at output | OIP_3 OP_{1dB} | | 24 8 | | | |

Table 8 AC characteristics, $V_{CE} = 1.8\text{ V}$, $f = 1.5\text{ GHz}$

| Parameter | Symbol | Values | | | Unit | Note or test condition |
|--|--------------------------|--------|----------------|------|------|---|
| | | Min. | Typ. | Max. | | |
| Power gain | | - | | - | dB | $I_C = 15\text{ mA}$ |
| <ul style="list-style-type: none"> Maximum power gain Transducer gain | G_{ma} $ S_{21} ^2$ | | 24 23 | | | |
| Noise figure | | | | | | $I_C = 8\text{ mA}$ |
| <ul style="list-style-type: none"> Minimum noise figure Associated gain | NF_{min} G_{ass} | | 0.85 21 | | | |
| Linearity | | | | | dBm | $Z_S = Z_L = 50\ \Omega$, $I_C = 15\text{ mA}$ |
| <ul style="list-style-type: none"> 3rd order intercept point at output 1 dB gain compression point at output | OIP_3 OP_{1dB} | | 23 7 | | | |

Table 9 AC characteristics, $V_{CE} = 1.8\text{ V}$, $f = 1.9\text{ GHz}$

| Parameter | Symbol | Values | | | Unit | Note or test condition |
|--|--------------------------|--------|------------------|------|------|---|
| | | Min. | Typ. | Max. | | |
| Power gain | | - | | - | dB | $I_C = 15\text{ mA}$ |
| <ul style="list-style-type: none"> Maximum power gain Transducer gain | G_{ma} $ S_{21} ^2$ | | 23.5 22.5 | | | |
| Noise figure | | | | | | $I_C = 8\text{ mA}$ |
| <ul style="list-style-type: none"> Minimum noise figure Associated gain | NF_{min} G_{ass} | | 0.9 20.5 | | | |
| Linearity | | | | | dBm | $Z_S = Z_L = 50\ \Omega$, $I_C = 15\text{ mA}$ |
| <ul style="list-style-type: none"> 3rd order intercept point at output 1 dB gain compression point at output | OIP_3 OP_{1dB} | | 23.5 7.5 | | | |

Electrical characteristics

Table 10 AC characteristics, $V_{CE} = 1.8\text{ V}$, $f = 2.4\text{ GHz}$

| Parameter | Symbol | Values | | | Unit | Note or test condition |
|--|--------------------------|--------|------------------|------|------|---|
| | | Min. | Typ. | Max. | | |
| Power gain | | - | | - | dB | $I_C = 15\text{ mA}$ |
| <ul style="list-style-type: none"> Maximum power gain Transducer gain | G_{ma} $ S_{21} ^2$ | | 22.5 21.5 | | | |
| Noise figure | | | | | | $I_C = 8\text{ mA}$ |
| <ul style="list-style-type: none"> Minimum noise figure Associated gain | NF_{min} G_{ass} | | 0.95 20 | | | |
| Linearity | | | | | dBm | $Z_S = Z_L = 50\ \Omega$, $I_C = 15\text{ mA}$ |
| <ul style="list-style-type: none"> 3rd order intercept point at output 1 dB gain compression point at output | OIP_3 OP_{1dB} | | 22.5 6.5 | | | |

Table 11 AC characteristics, $V_{CE} = 1.8\text{ V}$, $f = 3.5\text{ GHz}$

| Parameter | Symbol | Values | | | Unit | Note or test condition |
|--|--------------------------|--------|----------------|------|------|---|
| | | Min. | Typ. | Max. | | |
| Power gain | | - | | - | dB | $I_C = 15\text{ mA}$ |
| <ul style="list-style-type: none"> Maximum power gain Transducer gain | G_{ma} $ S_{21} ^2$ | | 21 19.5 | | | |
| Noise figure | | | | | | $I_C = 8\text{ mA}$ |
| <ul style="list-style-type: none"> Minimum noise figure Associated gain | NF_{min} G_{ass} | | 1.0 18 | | | |
| Linearity | | | | | dBm | $Z_S = Z_L = 50\ \Omega$, $I_C = 15\text{ mA}$ |
| <ul style="list-style-type: none"> 3rd order intercept point at output 1 dB gain compression point at output | OIP_3 OP_{1dB} | | 22 6 | | | |

Table 12 AC characteristics, $V_{CE} = 1.8\text{ V}$, $f = 5.5\text{ GHz}$

| Parameter | Symbol | Values | | | Unit | Note or test condition |
|--|--------------------------|--------|-----------------|------|------|---|
| | | Min. | Typ. | Max. | | |
| Power gain | | - | | - | dB | $I_C = 15\text{ mA}$ |
| <ul style="list-style-type: none"> Maximum power gain Transducer gain | G_{ma} $ S_{21} ^2$ | | 18 16.5 | | | |
| Noise figure | | | | | | $I_C = 8\text{ mA}$ |
| <ul style="list-style-type: none"> Minimum noise figure Associated gain | NF_{min} G_{ass} | | 1.1 15.5 | | | |
| Linearity | | | | | dBm | $Z_S = Z_L = 50\ \Omega$, $I_C = 15\text{ mA}$ |
| <ul style="list-style-type: none"> 3rd order intercept point at output 1 dB gain compression point at output | OIP_3 OP_{1dB} | | 19.5 4.5 | | | |

Electrical characteristics

Table 13 AC characteristics, $V_{CE} = 1.8\text{ V}$, $f = 10\text{ GHz}$

| Parameter | Symbol | Values | | | Unit | Note or test condition | | |
|--|--------------------------|-------------|------------|------|-----------|---|----|---------------------|
| | | Min. | Typ. | Max. | | | | |
| Power gain | | - | | - | dB | $I_C = 15\text{ mA}$ | | |
| <ul style="list-style-type: none"> Maximum power gain Transducer gain | G_{ma} $ S_{21} ^2$ | | 13.5 10 | | | | | |
| Noise figure | | | - | | | - | dB | $I_C = 8\text{ mA}$ |
| <ul style="list-style-type: none"> Minimum noise figure Associated gain | NF_{min} G_{ass} | | | | 1.7 10 | | | |
| Linearity | | | | | dBm | $Z_S = Z_L = 50\ \Omega$, $I_C = 15\text{ mA}$ | | |
| <ul style="list-style-type: none"> 3rd order intercept point at output 1 dB gain compression point at output | OIP_3 OP_{1dB} | 16.5 0.5 | | | | | | |

Note: $G_{ms} = |S_{21}/S_{12}|$ for $k < 1$; $G_{ma} = |S_{21}/S_{12}|(k-(k^2-1)^{1/2})$ for $k > 1$. In order to get the NF_{min} values, stated in this chapter the test fixture losses have been subtracted from all measured results. OIP_3 value depends on termination of all intermodulation frequency components. Termination used for this measurement is $50\ \Omega$ from 0.2 MHz to 12 GHz.

Electrical characteristics

3.4 Characteristic DC diagrams

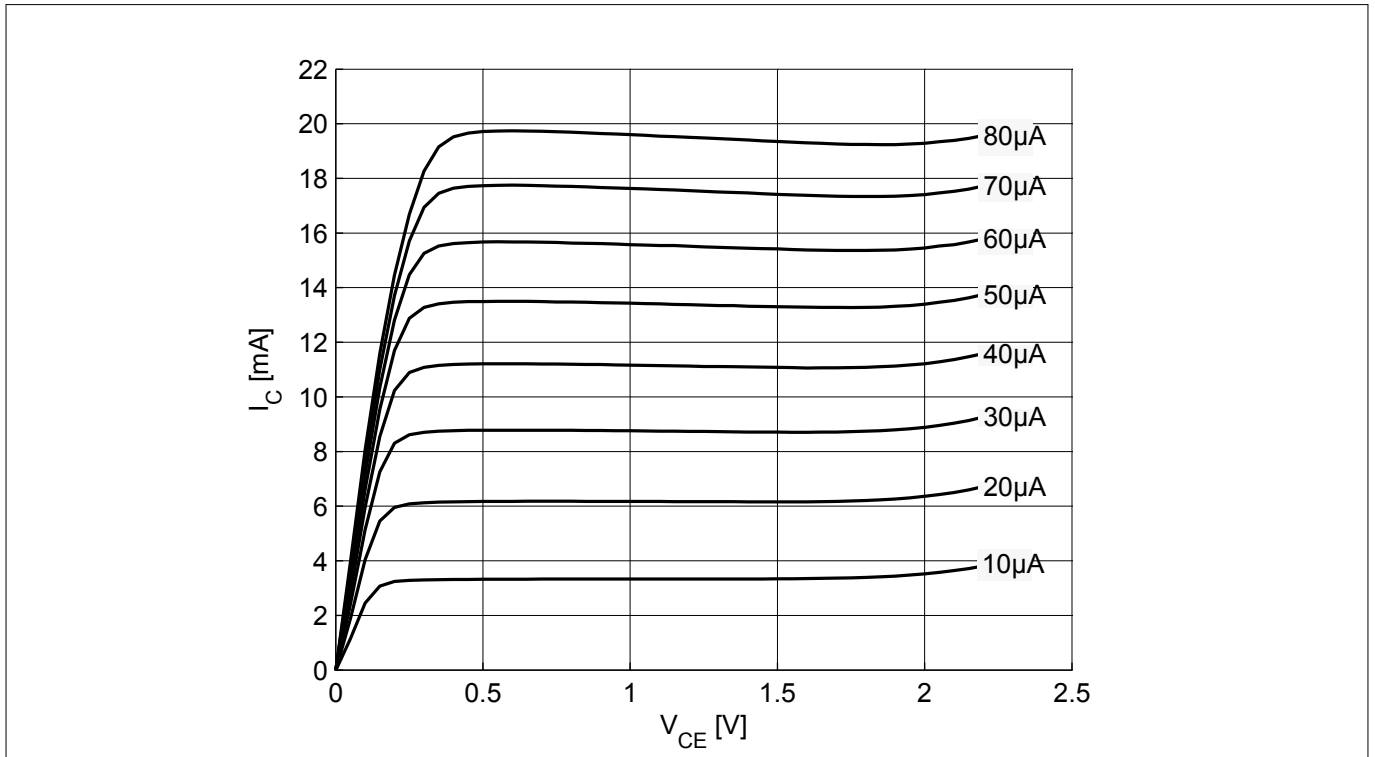


Figure 3 Collector current vs. collector emitter voltage $I_C = f(V_{CE})$, $I_B = \text{parameter}$

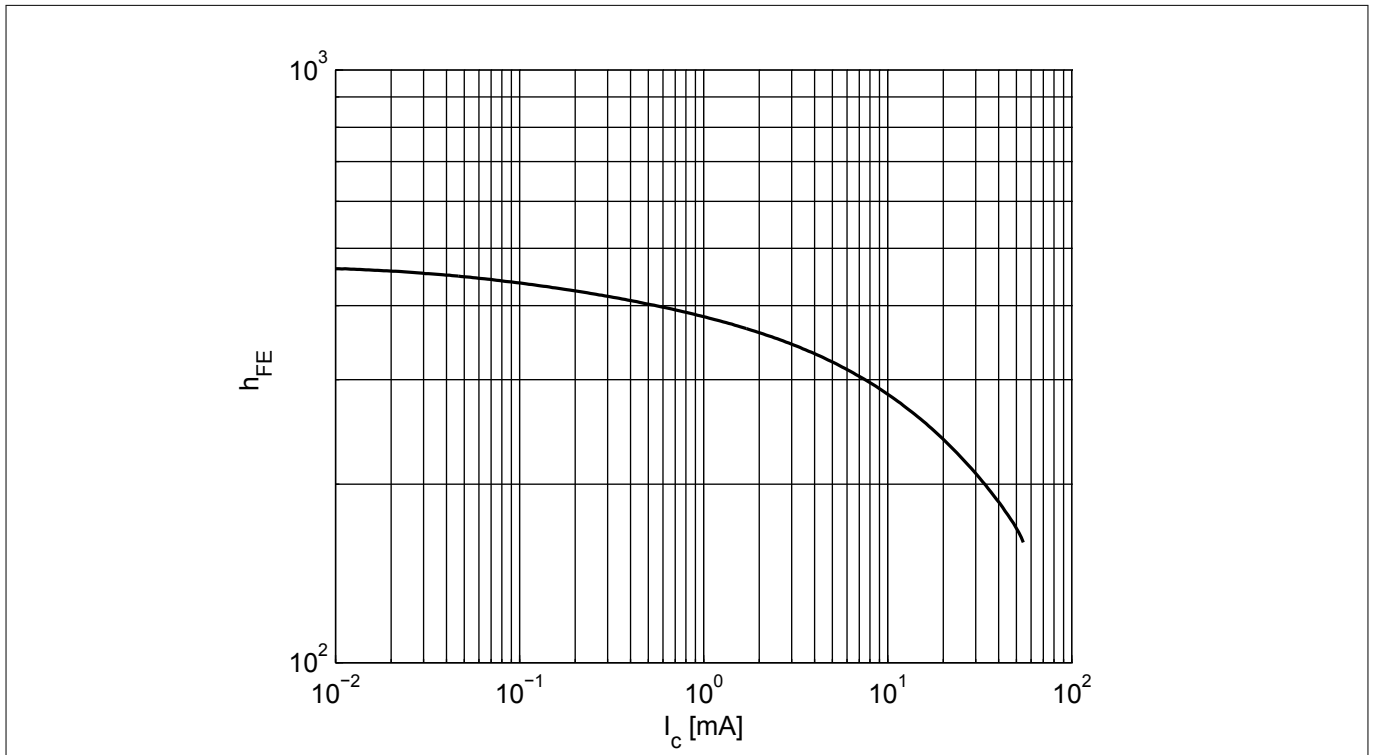


Figure 4 DC current gain $h_{FE} = f(I_C)$, $V_{CE} = 1.8 V$

Electrical characteristics

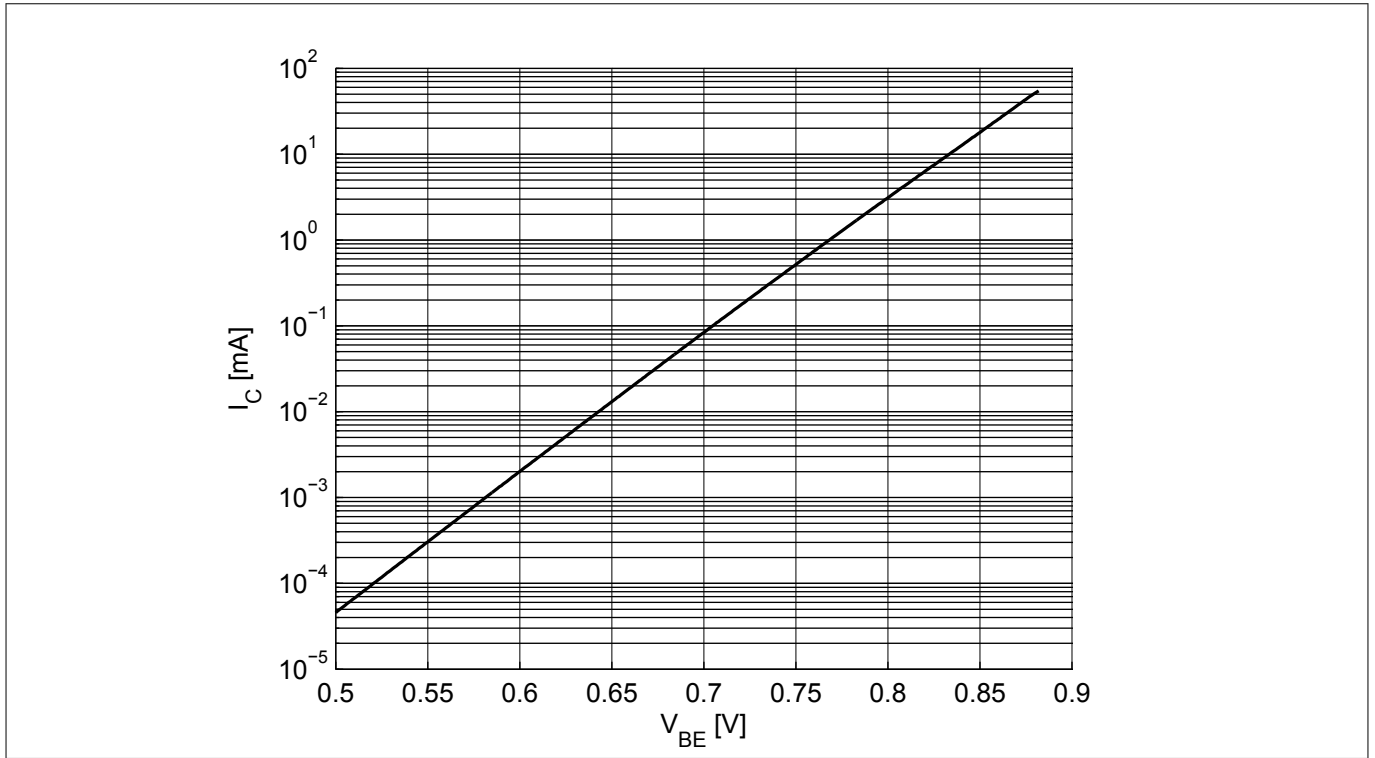


Figure 5 Collector current vs. base emitter forward voltage $I_C = f(V_{BE})$, $V_{CE} = 1.8$ V

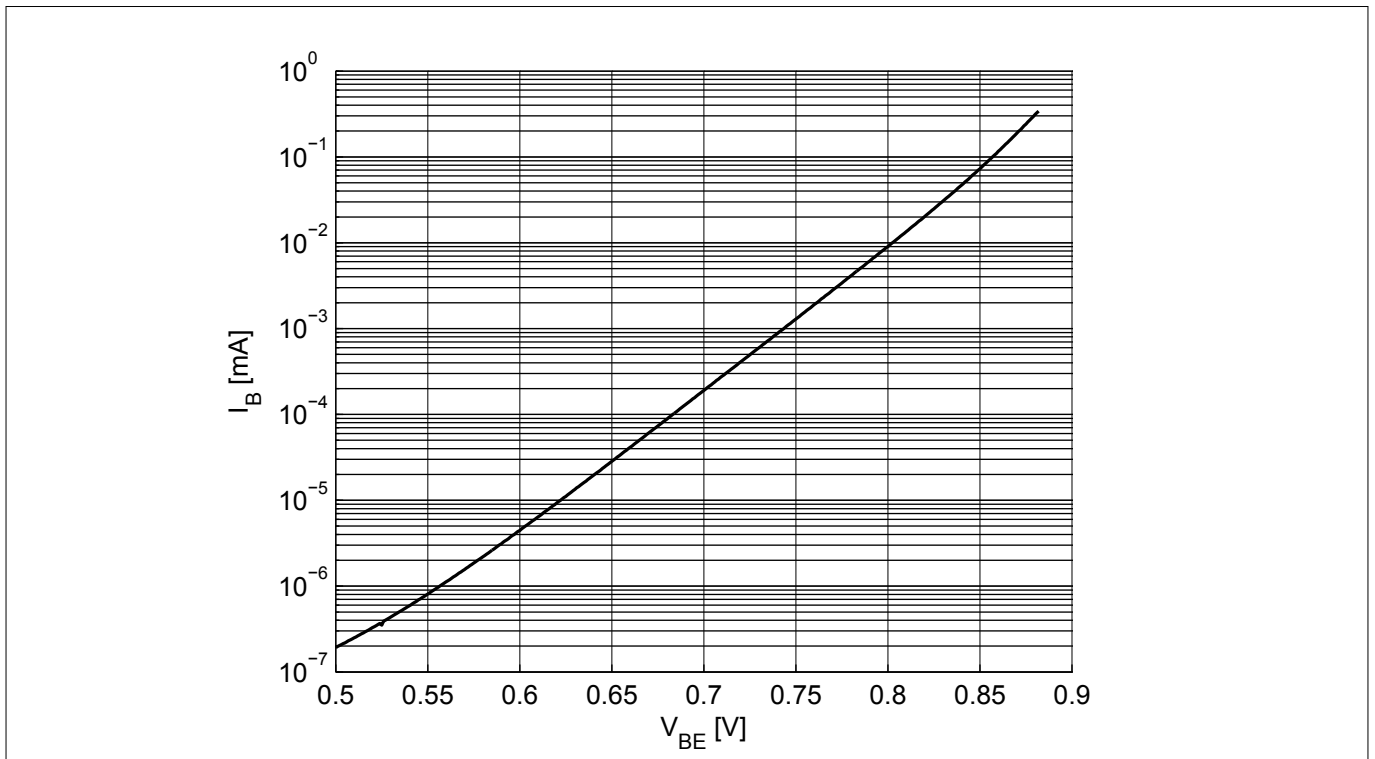


Figure 6 Base current vs. base emitter forward voltage $I_B = f(V_{BE})$, $V_{CE} = 1.8$ V

Electrical characteristics

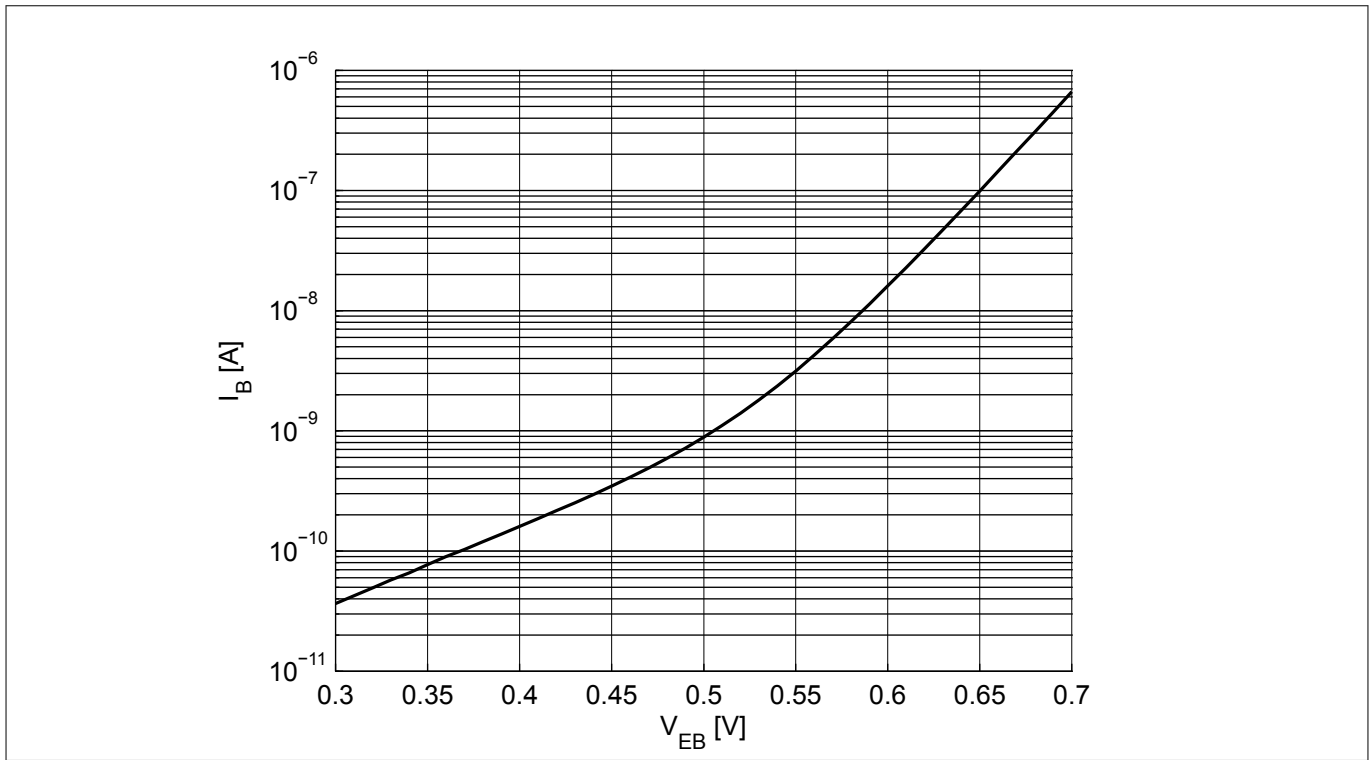


Figure 7 Base current vs. base emitter reverse voltage $I_B = f(V_{EB}), V_{CE} = 1.8 \text{ V}$

Electrical characteristics

3.5 Characteristic AC diagrams

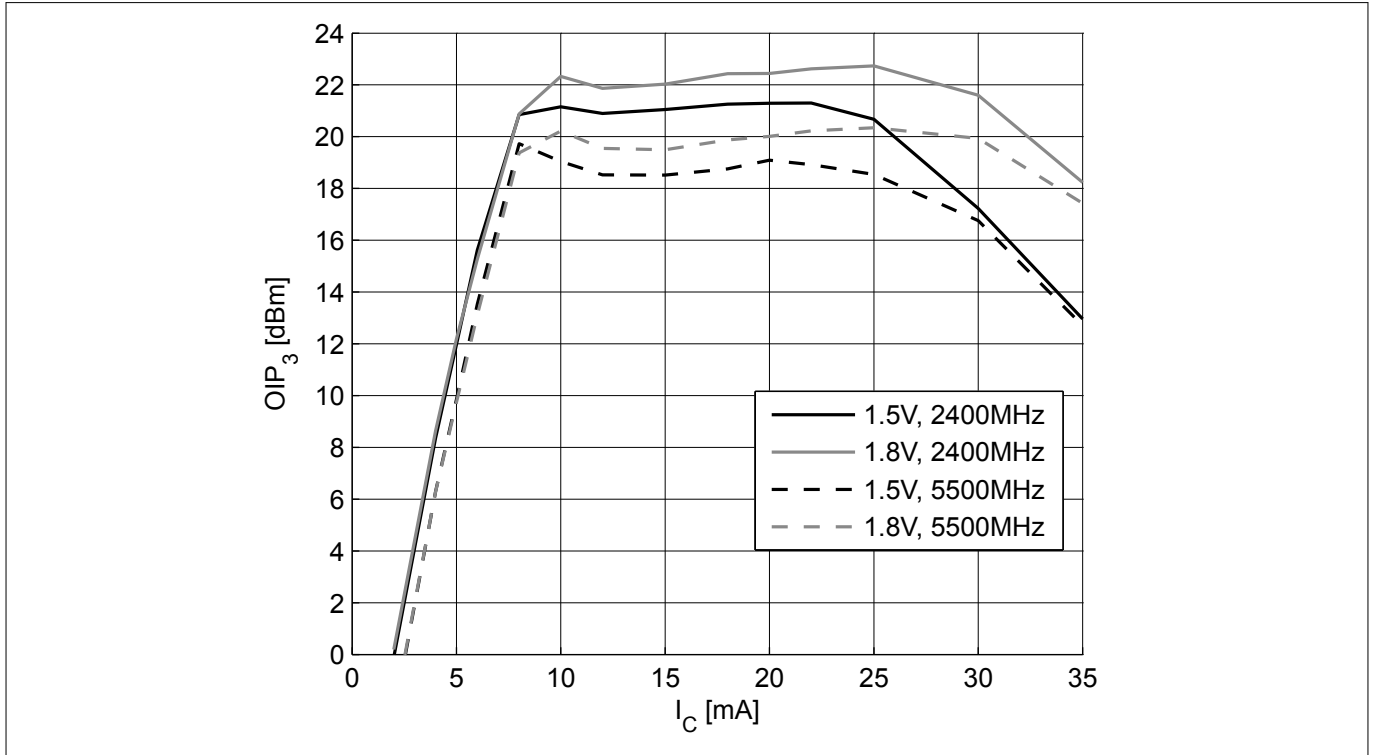


Figure 8 3rd order intercept point at output $OIP_3 = f(I_C)$, $Z_S = Z_L = 50 \Omega$, V_{CE} , $f =$ parameters

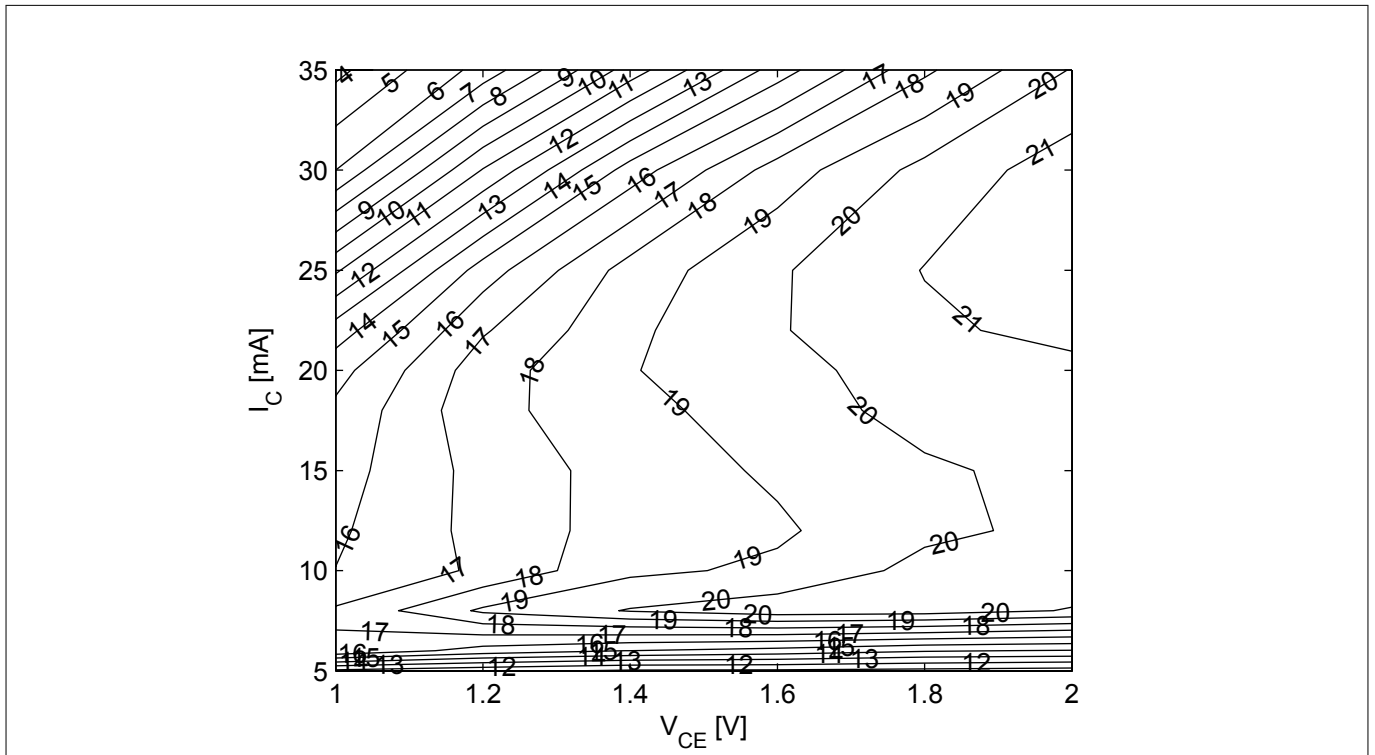


Figure 9 3rd order intercept point at output $OIP_3 [dBm] = f(I_C, V_{CE})$, $Z_S = Z_L = 50 \Omega$, $f = 5.5 GHz$

Electrical characteristics

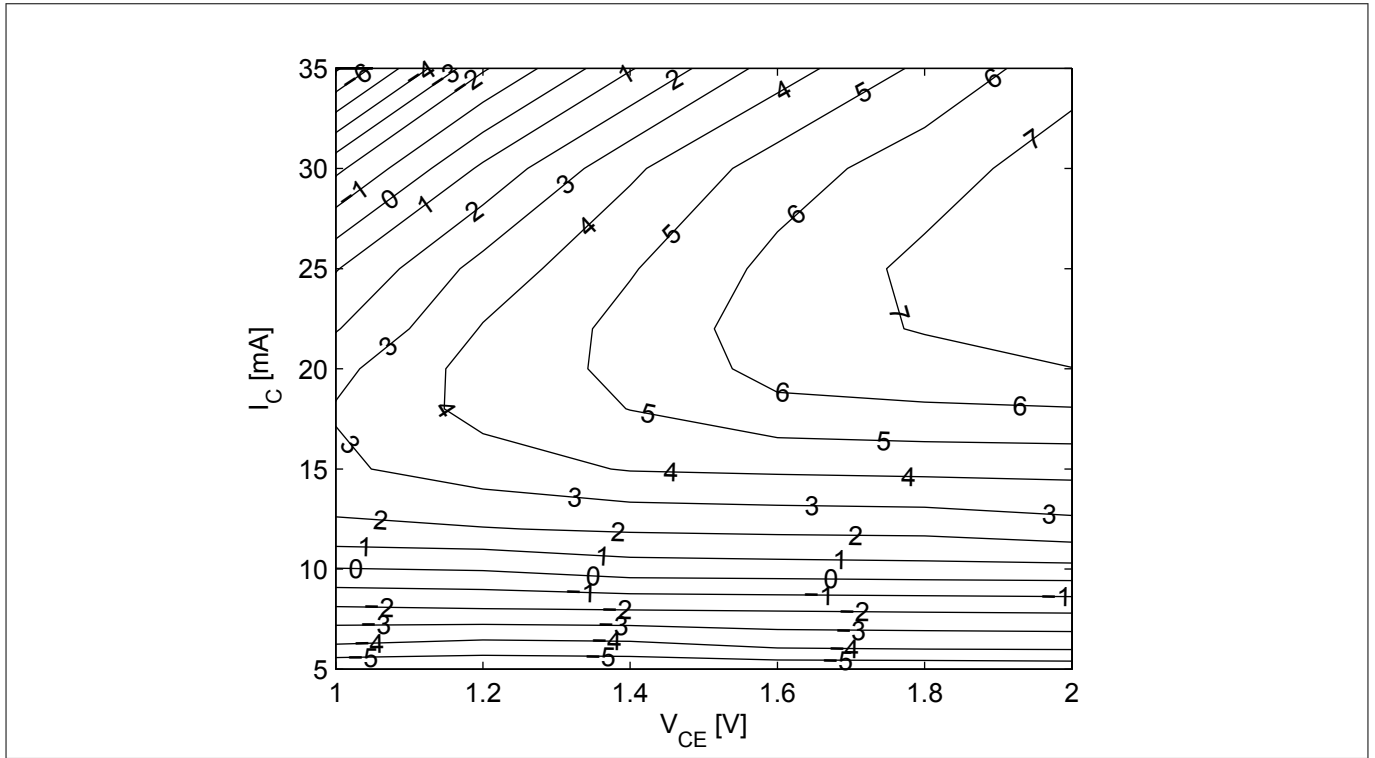


Figure 10 Compression point at output $OP_{1dB} [dBm] = f(I_C, V_{CE}), Z_S = Z_L = 50 \Omega, f = 5.5 \text{ GHz}$

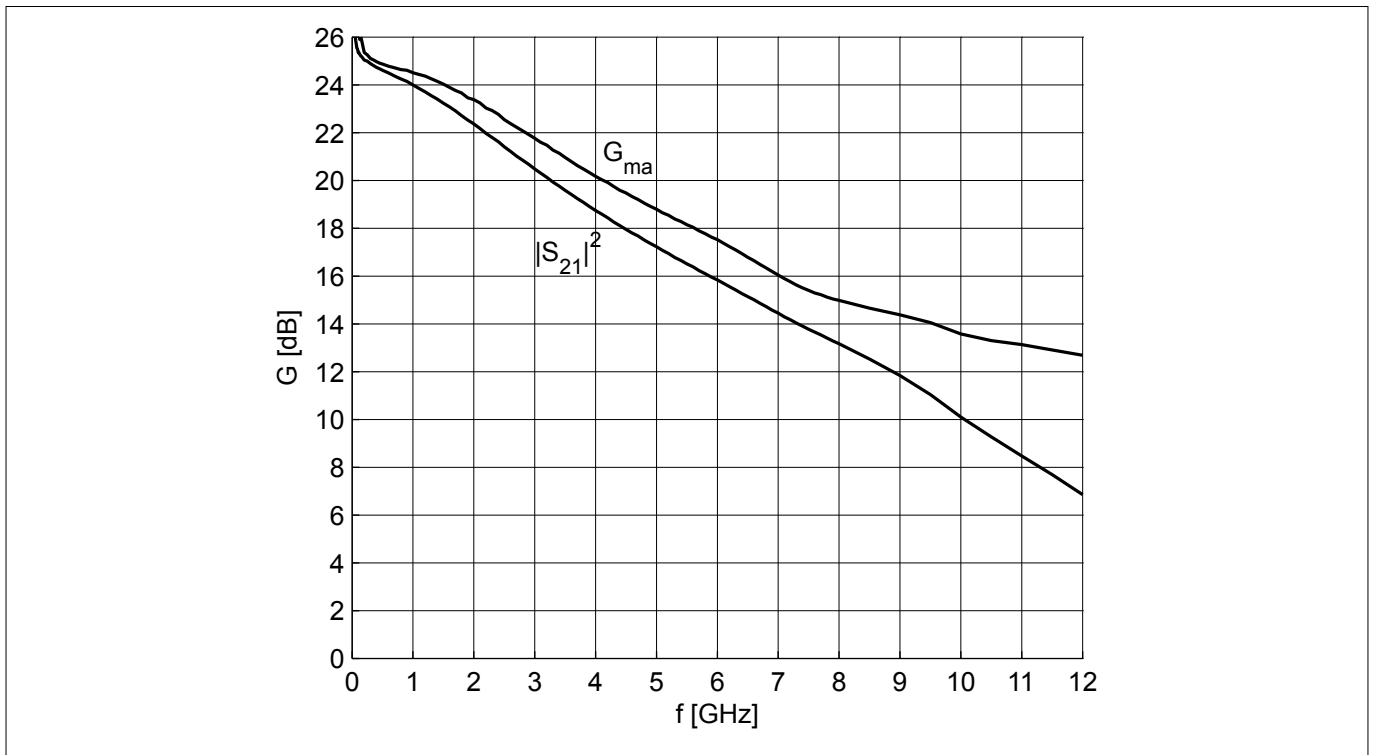


Figure 11 Gain $G_{ma}, G_{ms}, |S_{21}|^2 = f(f), V_{CE} = 1.8 \text{ V}, I_C = 15 \text{ mA}$

Electrical characteristics

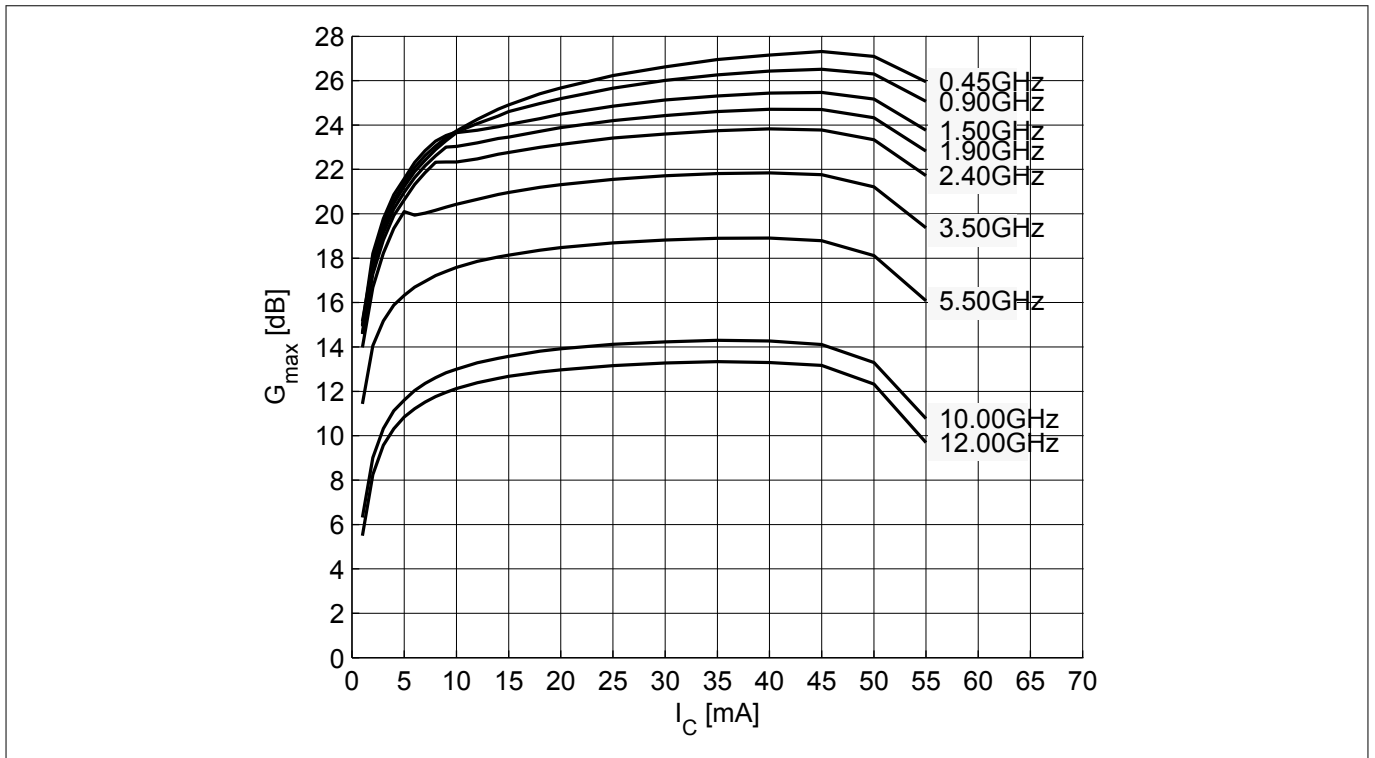


Figure 12 Maximum power gain $G_{max} = f(I_C)$, $V_{CE} = 1.8\text{ V}$, $f =$ parameter in GHz

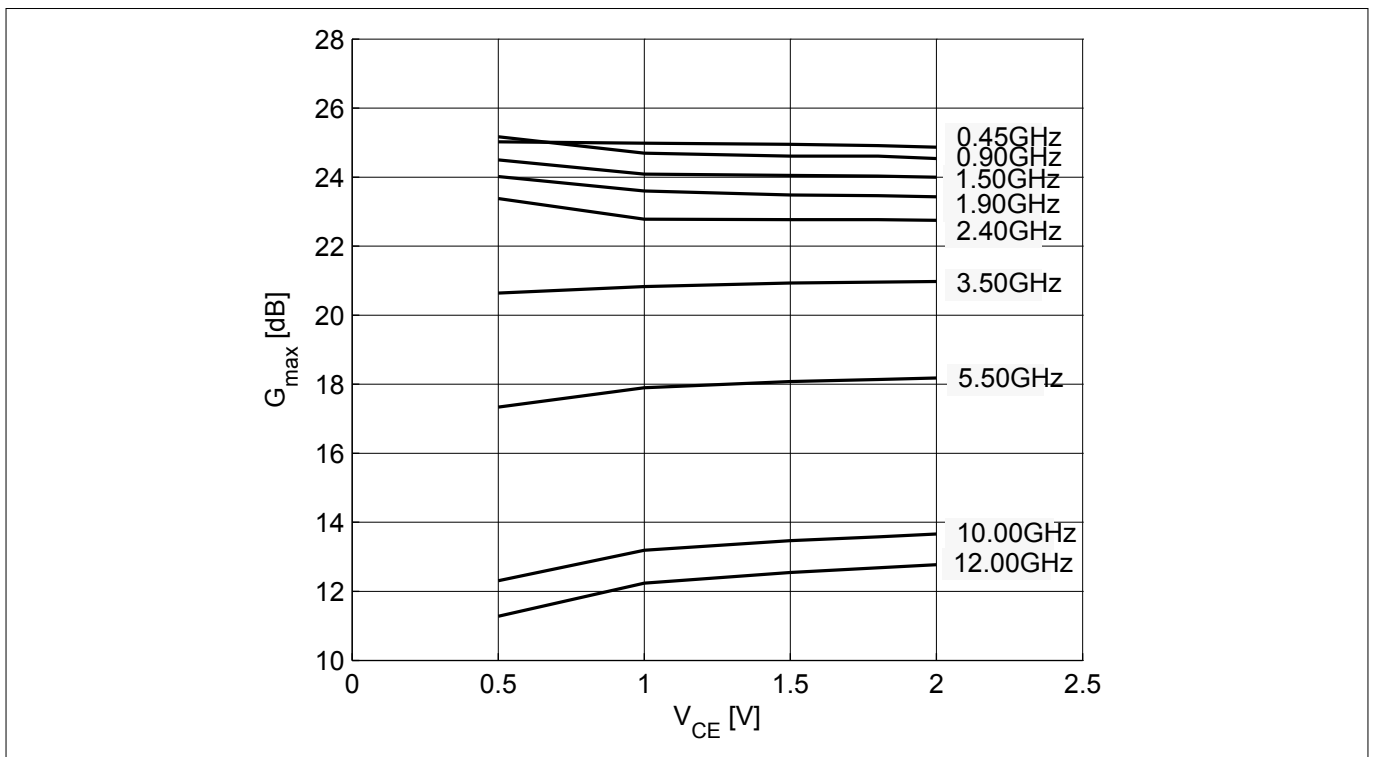


Figure 13 Maximum power gain $G_{max} = f(V_{CE})$, $I_C = 15\text{ mA}$, $f =$ parameter in GHz

Electrical characteristics

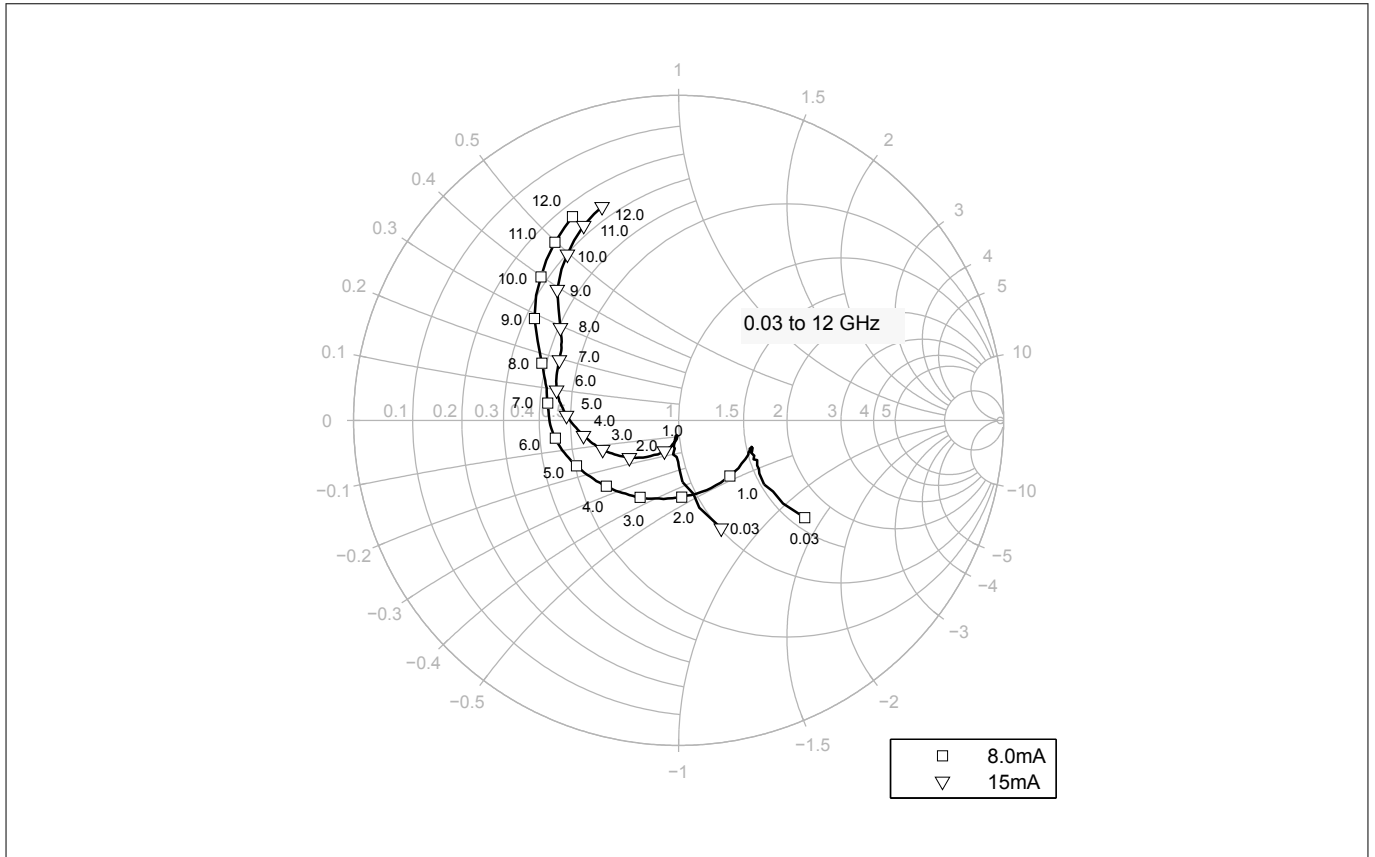


Figure 14 Input reflection coefficient $S_{11} = f(f)$, $V_{CE} = 1.8\text{ V}$, $I_C = 8 / 15\text{ mA}$

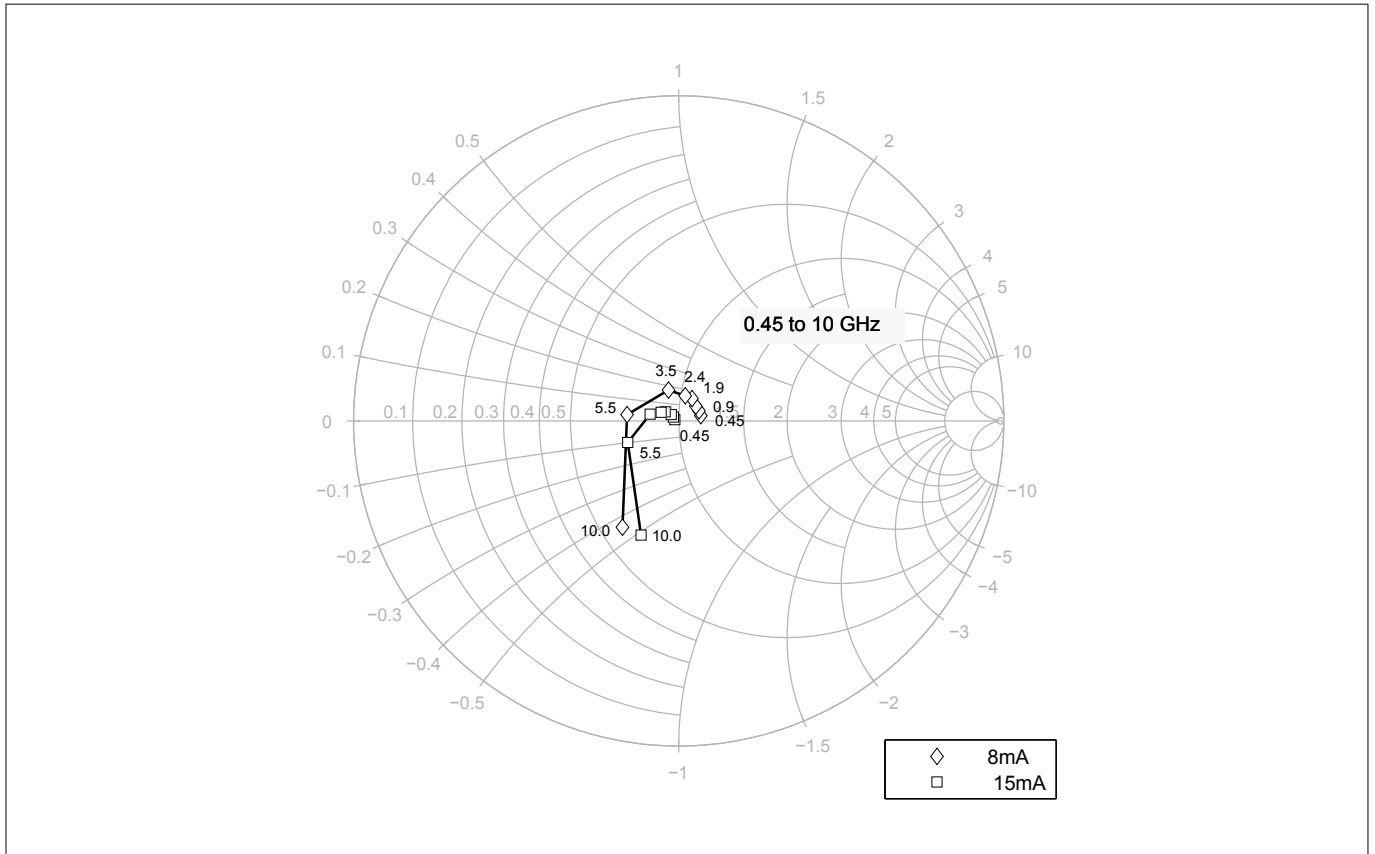


Figure 15 Source impedance for minimum noise figure $Z_{s,opt} = f(f)$, $V_{CE} = 1.8\text{ V}$, $I_C = 8 / 15\text{ mA}$

Electrical characteristics

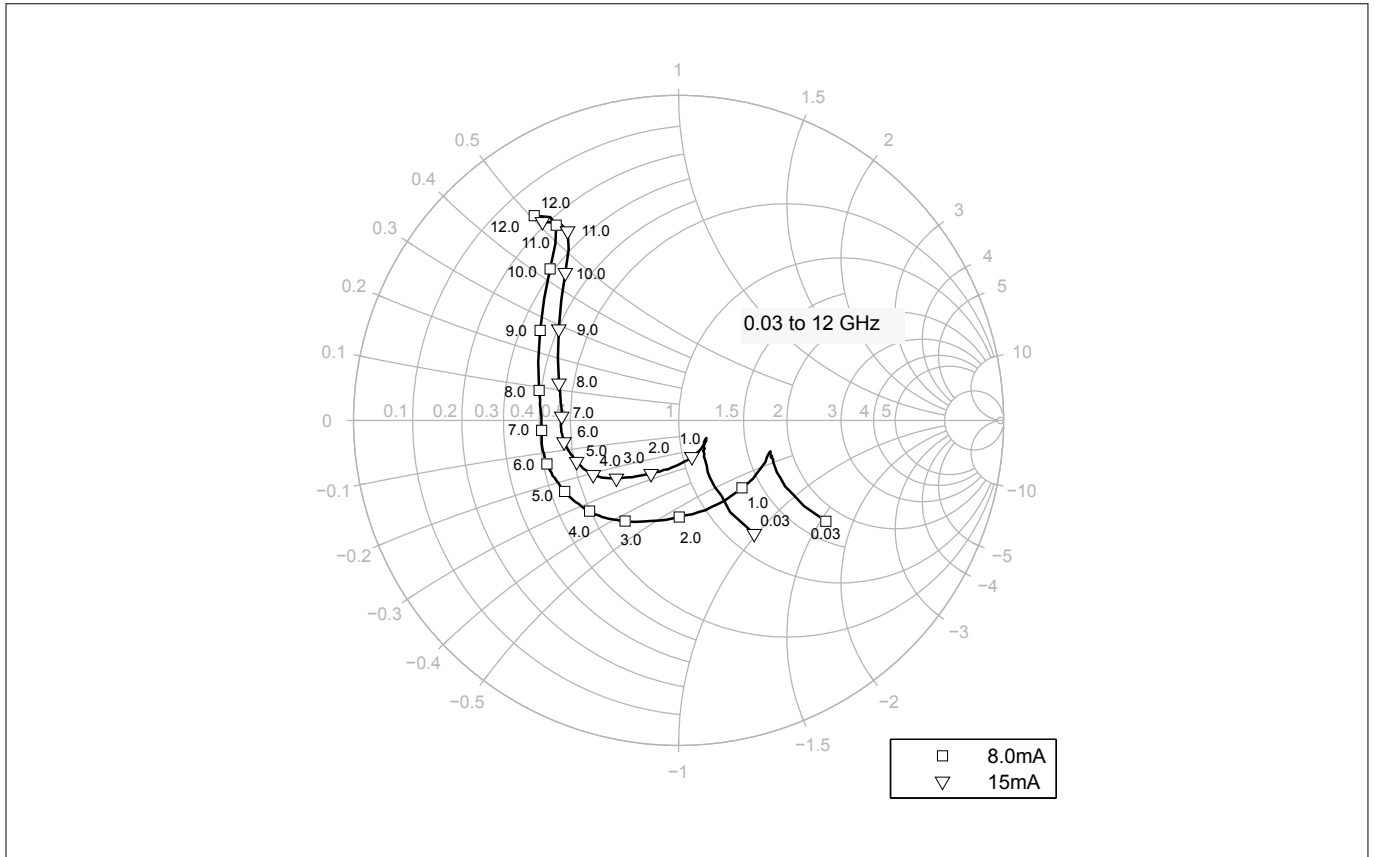


Figure 16 Output reflection coefficient $S_{22} = f(f)$, $V_{CE} = 1.8 \text{ V}$, $I_C = 8 / 15 \text{ mA}$

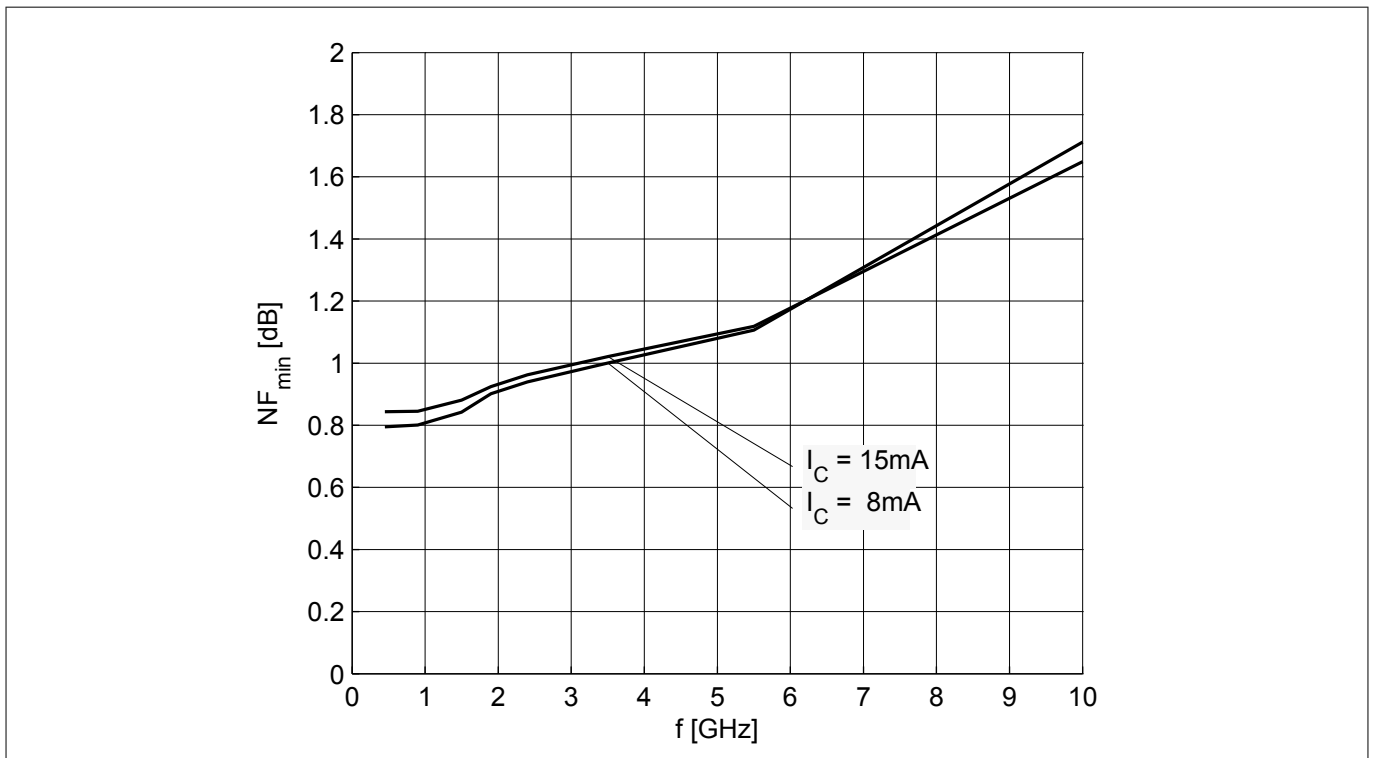


Figure 17 Noise figure $NF_{min} = f(f)$, $V_{CE} = 1.8 \text{ V}$, $Z_S = Z_{S,opt}$, $I_C = 8 / 15 \text{ mA}$

Electrical characteristics

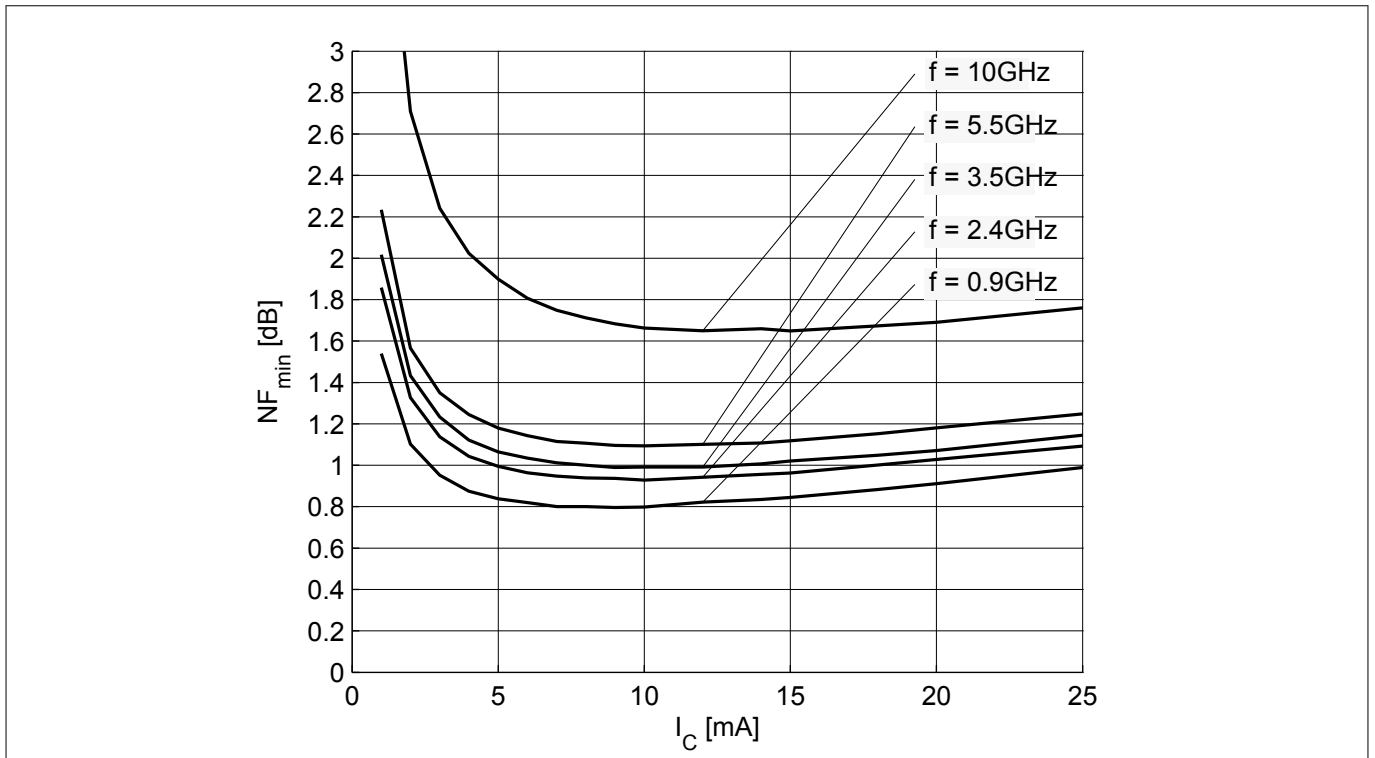


Figure 18 Noise figure $NF_{min} = f(I_C)$, $V_{CE} = 1.8\text{ V}$, $Z_S = Z_{S,opt}$, $f = \text{parameter in GHz}$

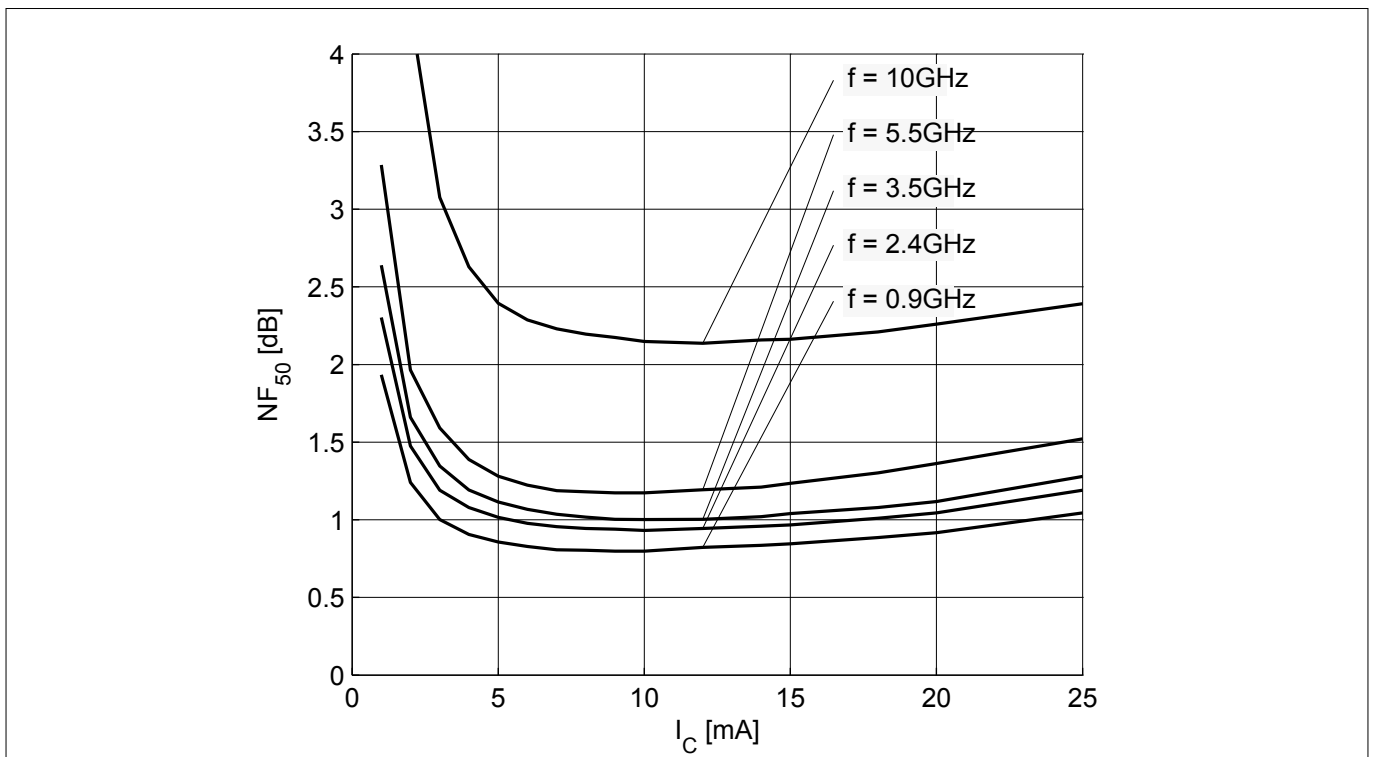


Figure 19 Noise figure $NF_{50} = f(I_C)$, $V_{CE} = 1.8\text{ V}$, $Z_S = 50\ \Omega$, $f = \text{parameter in GHz}$

Note: The curves shown in this chapter have been generated using typical devices but shall not be considered as a guarantee that all devices have identical characteristic curves. $T_A = 25\text{ }^\circ\text{C}$.

Package information TSFP-4-1

4 Package information TSFP-4-1

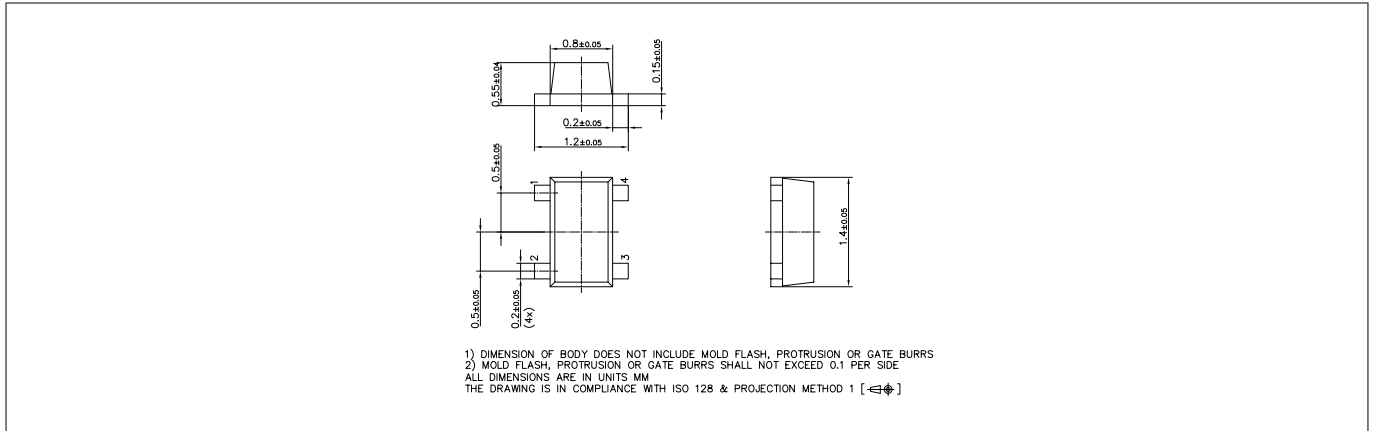


Figure 20 Package outline

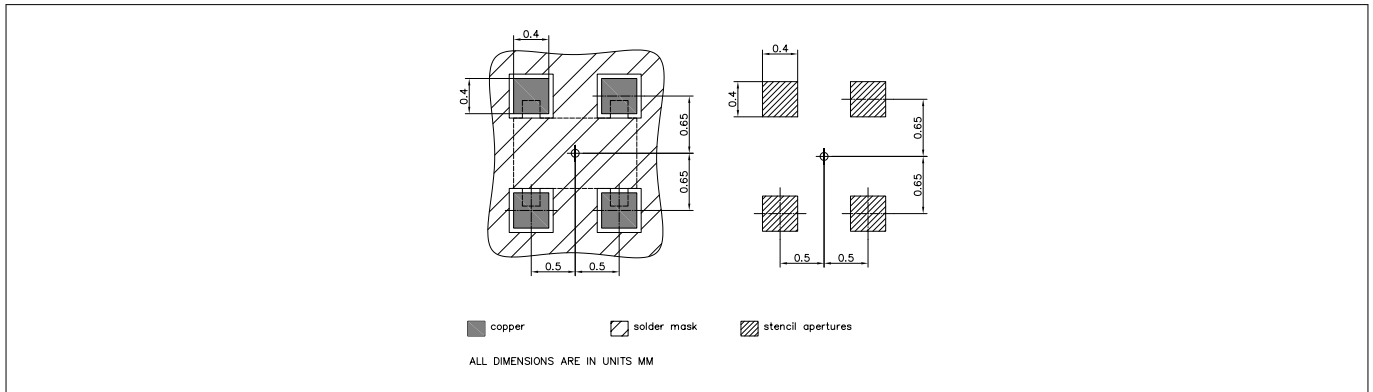


Figure 21 Foot print

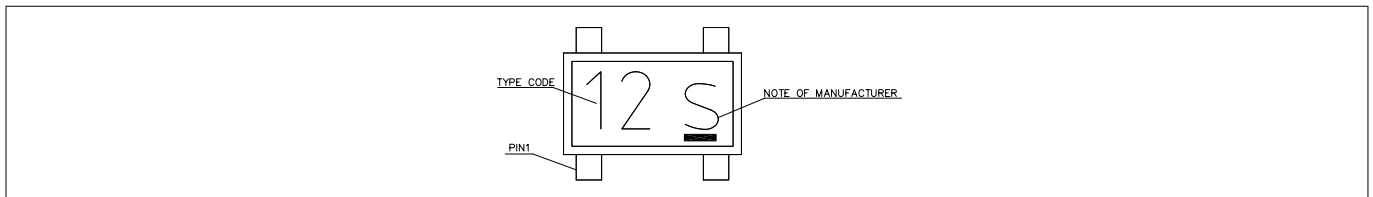


Figure 22 Marking layout example

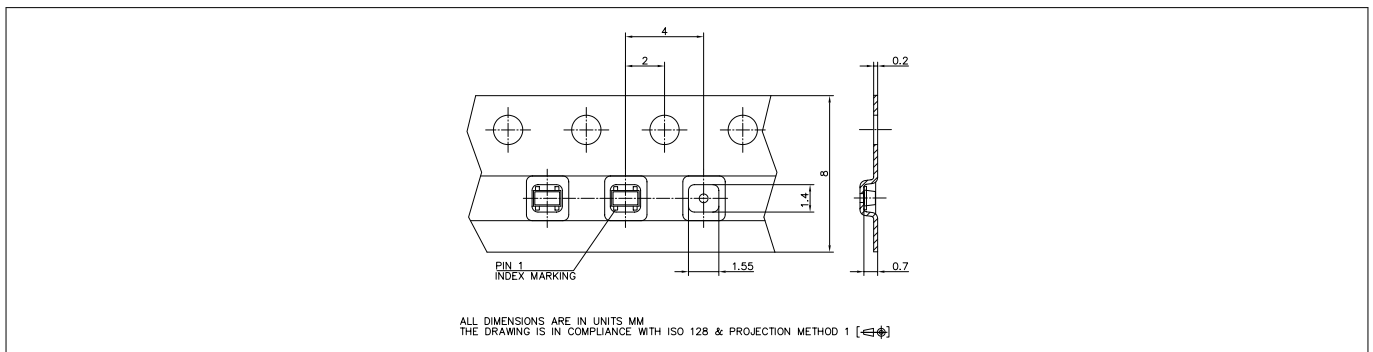


Figure 23 Tape dimensions

Revision history

Revision history

| Document version | Date of release | Description of changes |
|------------------|-----------------|------------------------|
| 2.0 | 2018-09-26 | New datasheet layout. |

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2018-09-26

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2018 Infineon Technologies AG
All Rights Reserved.

Do you have a question about any aspect of this document?
Email: erratum@infineon.com

Document reference
IFX-apw1519121554586

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Bipolar Transistors](#) category:

Click to view products by [Infineon](#) manufacturer:

Other Similar products are found below :

[MAPRST0912-50](#) [MCH4016-TL-H](#) [MMBT5551-G](#) [MRF10120](#) [15GN01CA-TB-E](#) [PH1214-25M](#) [MAPRST0912-350](#) [MMBTH10-TP](#) [BFP640F H6327](#) [BFP 720F H6327](#) [BFP 740F H6327](#) [BFR 360F H6765](#) [MRF10031](#) [NSVF4009SG4T1G](#) [BFP 182R E7764](#) [BFP405H6740XTSA1](#) [MRF10350](#) [ASMA201](#) [BFR360FH6765XTSA1](#) [BFP410H6327XTSA1](#) [BFP620FH7764XTSA1](#) [BFP720ESDH6327XTSA1](#) [BFP720FH6327XTSA1](#) [BFR360L3E6765XTMA1](#) [BFP420H6433XTMA1](#) [BFP420H6740XTSA1](#) [MCH4015-TL-H](#) [BF888H6327XTSA1](#) [MMBT2222A-G](#) [BFP196WH6327XTSA1](#) [BFP405FH6327XTSA1](#) [BFP640ESDH6327XTSA1](#) [BFR193L3E6327XTMA1](#) [BFS483H6327XTSA1](#) [NSVF4020SG4T1G](#) [NSVF6003SB6T1G](#) [MRF10005](#) [BFP420FH6327XTSA1](#) [BFP740FESDH6327XTSA1](#) [BFR181E6327HTSA1](#) [BFR181WH6327XTSA1](#) [BFR182E6327HTSA1](#) [BFR193E6327HTSA1](#) [BFP181E7764HTSA1](#) [BFP183WH6327XTSA1](#) [BFP720H6327XTSA1](#) [BFR182WH6327XTSA1](#) [BFU590GX](#) [MAPR-000912-500S00](#) [BFR340FH6327XTSA1](#)