

# BFP843

## Robust low noise broadband pre-matched RF bipolar transistor



Order now



Technical  
documents



Simulation



Support

## Product description

The BFP843 is a robust low noise broadband pre-matched RF heterojunction bipolar transistor (HBT).



## Feature list

- Unique combination of high end RF performance and robustness: 20 dBm maximum RF input power, 1.5 kV HBM ESD hardness
- High transition frequency enables best in class noise performance at high frequencies:  $NF_{min} = 1.2 \text{ dB}$  at 5.5 GHz, 1.8 V, 8 mA
- High gain  $G_{ma} = 17 \text{ dB}$  at 5.5 GHz, 1.8 V, 15 mA
- OIP<sub>3</sub> = 19.5 dBm at 5.5 GHz, 1.8 V, 15 mA
- Suitable for low voltage applications e.g.  $V_{CC} = 1.2 \text{ V}$  and 1.8 V (2.85 V, 3.3 V, 3.6 V require a corresponding collector resistor)

## Product validation

Qualified for industrial applications according to the relevant tests of JEDEC47/20/22.

## Potential applications

- WLAN, WiMAX and UWB
- Satellite communication systems: satellite radio (SDARs, DAB) and navigation systems (e.g. GPS, GLONASS, BeiDou, Galileo)

## Device information

**Table 1** Part information

Product name / Ordering code	Package	Pin configuration				Marking	Pieces / Reel
BFP843 / BFP843H6327XTSA1	SOT343	1 = B	2 = E	3 = C	4 = E	T2s	3000

**Attention: ESD (Electrostatic discharge) sensitive device, observe handling precautions**

---

**Table of contents****Table of contents**

<b>Product description</b>	1
<b>Feature list</b>	1
<b>Product validation</b>	1
<b>Potential applications</b>	1
<b>Device information</b>	1
<b>Table of contents</b>	2
<b>1 Absolute maximum ratings</b>	3
<b>2 Thermal characteristics</b>	4
<b>3 Electrical characteristics</b>	5
3.1 DC characteristics	5
3.2 General AC characteristics	5
3.3 Frequency dependent AC characteristics	6
3.4 Characteristic DC diagrams	10
3.5 Characteristic AC diagrams	13
<b>4 Package information SOT343</b>	19
<b>Revision history</b>	20
<b>Disclaimer</b>	21

**Absolute maximum ratings****1 Absolute maximum ratings****Table 2 Absolute maximum ratings at  $T_A = 25^\circ\text{C}$  (unless otherwise specified)**

Parameter	Symbol	Values		Unit	Note or test condition
		Min.	Max.		
Collector emitter voltage	$V_{CEO}$	-	2.25	V	Open base
			2.0		$T_A = -55^\circ\text{C}$ , open base
Collector emitter voltage <sup>1)</sup>	$V_{CES}$		2.25		E-B short circuited
			2.0		$T_A = -55^\circ\text{C}$ , E-B short circuited
Collector base voltage <sup>2)</sup>	$V_{CBO}$		2.9		Open emitter
			2.6		$T_A = -55^\circ\text{C}$ , open emitter
Base current	$I_B$	-5	5	mA	-
Collector current	$I_C$	-	55		
RF input power	$P_{RFin}$	-	20	dBM	
ESD stress pulse	$V_{ESD}$	-1.5	1.5	kV	HBM, all pins, acc. to JESD22-A114
Total power dissipation <sup>3)</sup>	$P_{tot}$	-	125	mW	$T_S \leq 99^\circ\text{C}$
Junction temperature	$T_J$	-	150	°C	-
Storage temperature	$T_{Stg}$	-55			

**Attention:** *Stresses above the max. values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Exceeding only one of these values may cause irreversible damage to the integrated circuit.*

<sup>1</sup>  $V_{CES}$  is similar to  $V_{CEO}$  due to design.

<sup>2</sup>  $V_{CBO}$  is similar to  $V_{CEO}$  due to design.


<sup>3</sup>  $T_S$  is the soldering point temperature.  $T_S$  is measured on the emitter lead at the soldering point of the PCB.

## Thermal characteristics

## 2 Thermal characteristics

**Table 3 Thermal resistance**

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Junction - soldering point	$R_{thJS}$	-	405	-	K/W	-

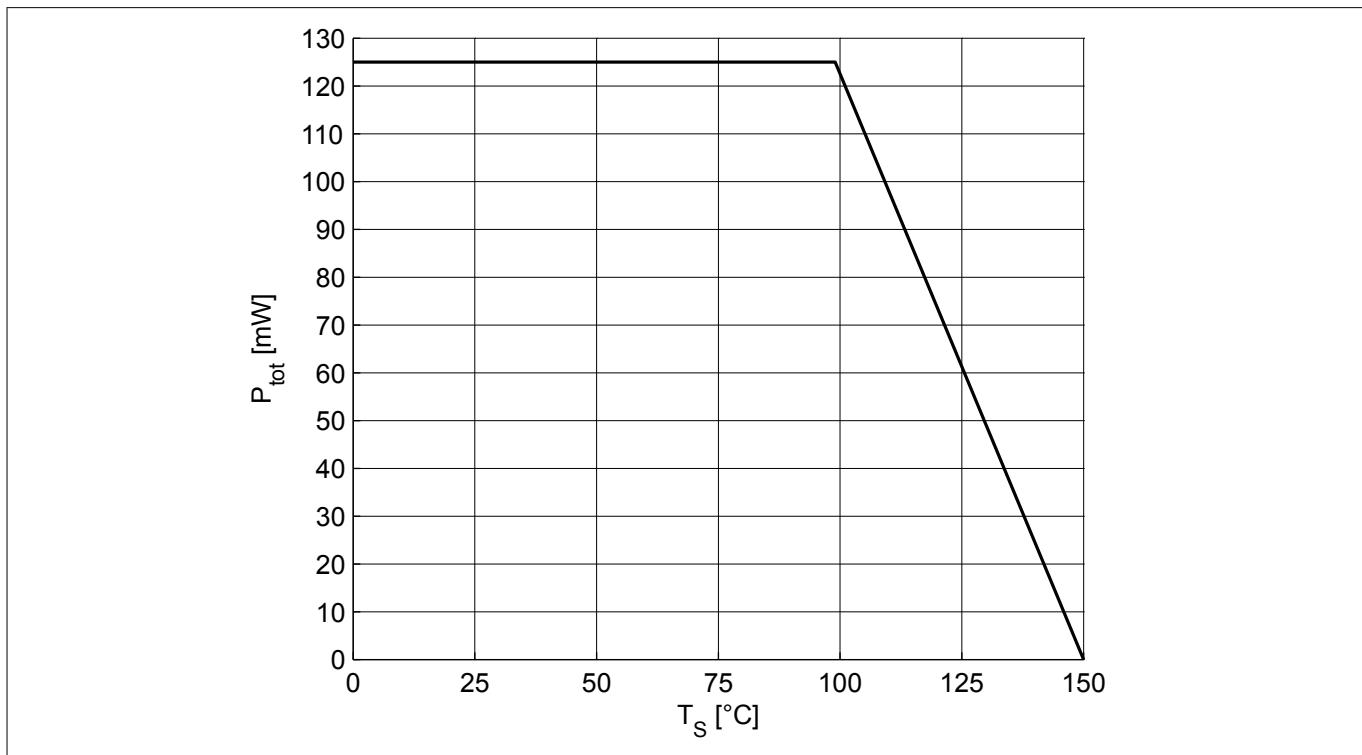**Figure 1****Total power dissipation  $P_{tot} = f(T_S)$**

## Electrical characteristics

## 3 Electrical characteristics

## 3.1 DC characteristics

Table 4 DC characteristics at  $T_A = 25^\circ\text{C}$ 

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Collector emitter breakdown voltage	$V_{(\text{BR})\text{CEO}}$	2.25	2.6	-	V	$I_C = 1 \text{ mA}, I_B = 0$ , open base
Collector emitter leakage current	$I_{\text{CES}}$	-	-	400 <sup>1)</sup>	nA	$V_{\text{CE}} = 1.5 \text{ V}, V_{\text{BE}} = 0$ , E-B short circuited
Collector base leakage current	$I_{\text{CBO}}$			400 <sup>1)</sup>		$V_{\text{CB}} = 1.5 \text{ V}, I_E = 0$ , open emitter
Emitter base leakage current	$I_{\text{EBO}}$			10 <sup>1)</sup>	$\mu\text{A}$	$V_{\text{EB}} = 0.5 \text{ V}, I_C = 0$ , open collector
DC current gain	$h_{\text{FE}}$			450		$V_{\text{CE}} = 1.8 \text{ V}, I_C = 15 \text{ mA}$ , pulse measured

## 3.2 General AC characteristics

Table 5 General AC characteristics at  $T_A = 25^\circ\text{C}$ 


Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Collector base capacitance <sup>2)</sup>	$C_{\text{CB}}$	-	5.23	-	pF	$f = 1 \text{ MHz}$ , $f = 1 \text{ GHz}$ , $V_{\text{CB}} = 1.8 \text{ V}, V_{\text{BE}} = 0$ , emitter grounded
			0.06			
Collector emitter capacitance	$C_{\text{CE}}$		0.5			$f = 1 \text{ MHz}$ , $V_{\text{CE}} = 1.8 \text{ V}, V_{\text{BE}} = 0$ , base grounded
Emitter base capacitance	$C_{\text{EB}}$			0.73		$f = 1 \text{ MHz}$ , $V_{\text{EB}} = 0.4 \text{ V}, V_{\text{CB}} = 0$ , collector grounded

<sup>1)</sup> Maximum values not limited by the device but by the short cycle time of the 100% test<sup>2)</sup> Including integrated feedback capacitance

## Electrical characteristics

## 3.3 Frequency dependent AC characteristics

Measurement setup is a test fixture with Bias-T's in a  $50\ \Omega$  system,  $T_A = 25\text{ }^\circ\text{C}$ .

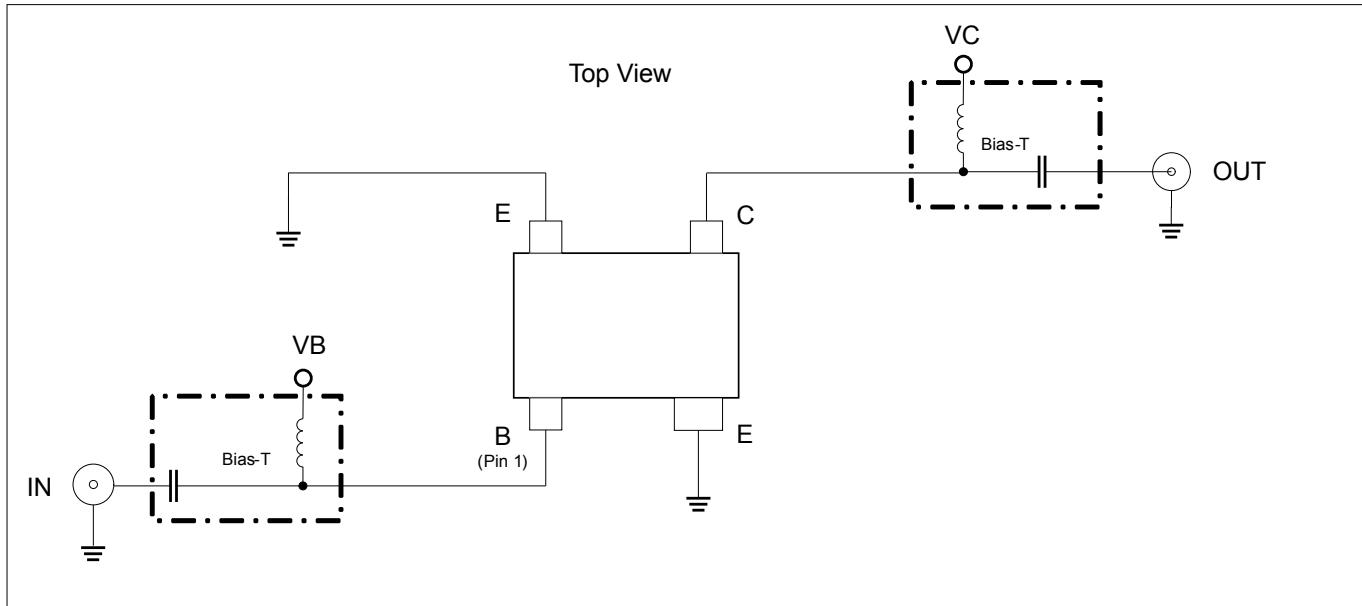

**Figure 2** Testing circuit

**Table 6** AC characteristics,  $V_{CE} = 1.8\text{ V}$ ,  $f = 450\text{ MHz}$

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ma}$ $ S_{21} ^2$	-	24.5	-	dB	$I_C = 15\text{ mA}$
• Maximum power gain • Transducer gain			24.5			
Noise figure	$NF_{min}$ $G_{ass}$	0.9	22		dBm	$I_C = 8\text{ mA}$
• Minimum noise figure • Associated gain						
Linearity	$OIP_3$ $OP_{1dB}$	24	7			$I_C = 15\text{ mA}, Z_S = Z_L = 50\ \Omega$
• 3rd order intercept point at output • 1 dB gain compression point at output						

## Electrical characteristics

**Table 7** AC characteristics,  $V_{CE} = 1.8$  V,  $f = 900$  MHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ma}$ $ S_{21} ^2$	-	24 24	-	dB	$I_C = 15$ mA
• Maximum power gain • Transducer gain						
Noise figure	$NF_{min}$ $G_{ass}$		0.9 22		dBm	$I_C = 8$ mA
• Minimum noise figure • Associated gain						
Linearity	$OIP_3$ $OP_{1dB}$		23.5 8		dBm	$I_C = 15$ mA, $Z_S = Z_L = 50$ Ω
• 3rd order intercept point at output • 1 dB gain compression point at output						

**Table 8** AC characteristics,  $V_{CE} = 1.8$  V,  $f = 1.5$  GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ma}$ $ S_{21} ^2$	-	23.5 23	-	dB	$I_C = 15$ mA
• Maximum power gain • Transducer gain						
Noise figure	$NF_{min}$ $G_{ass}$		0.95 21		dBm	$I_C = 8$ mA
• Minimum noise figure • Associated gain						
Linearity	$OIP_3$ $OP_{1dB}$		22.5 6		dBm	$I_C = 15$ mA, $Z_S = Z_L = 50$ Ω
• 3rd order intercept point at output • 1 dB gain compression point at output						

**Table 9** AC characteristics,  $V_{CE} = 1.8$  V,  $f = 1.9$  GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ma}$ $ S_{21} ^2$	-	22.5 22	-	dB	$I_C = 15$ mA
• Maximum power gain • Transducer gain						
Noise figure	$NF_{min}$ $G_{ass}$		0.95 20		dBm	$I_C = 8$ mA
• Minimum noise figure • Associated gain						
Linearity	$OIP_3$ $OP_{1dB}$		24 8.5		dBm	$I_C = 15$ mA, $Z_S = Z_L = 50$ Ω
• 3rd order intercept point at output • 1 dB gain compression point at output						

## Electrical characteristics

**Table 10** AC characteristics,  $V_{CE} = 1.8$  V,  $f = 2.4$  GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ma}$ $ S_{21} ^2$	-	21.5 21	-	dB	$I_C = 15$ mA
• Maximum power gain						
• Transducer gain						
Noise figure	$NF_{min}$ $G_{ass}$		1.0 19.5		dBm	$I_C = 8$ mA
• Minimum noise figure						
• Associated gain						
Linearity	$OIP_3$ $OP_{1dB}$		22	6.5	dBm	$I_C = 15$ mA, $Z_S = Z_L = 50$ Ω
• 3rd order intercept point at output						
• 1 dB gain compression point at output						

**Table 11** AC characteristics,  $V_{CE} = 1.8$  V,  $f = 3.5$  GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ma}$ $ S_{21} ^2$	-	19.5 19	-	dB	$I_C = 15$ mA
• Maximum power gain						
• Transducer gain						
Noise figure	$NF_{min}$ $G_{ass}$		1.1 17.5		dBm	$I_C = 8$ mA
• Minimum noise figure						
• Associated gain						
Linearity	$OIP_3$ $OP_{1dB}$		22.5	7	dBm	$I_C = 15$ mA, $Z_S = Z_L = 50$ Ω
• 3rd order intercept point at output						
• 1 dB gain compression point at output						

**Table 12** AC characteristics,  $V_{CE} = 1.8$  V,  $f = 5.5$  GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ma}$ $ S_{21} ^2$	-	17 15.5	-	dB	$I_C = 15$ mA
• Maximum power gain						
• Transducer gain						
Noise figure	$NF_{min}$ $G_{ass}$		1.2 15		dBm	$I_C = 8$ mA
• Minimum noise figure						
• Associated gain						
Linearity	$OIP_3$ $OP_{1dB}$		19.5 4		dBm	$I_C = 15$ mA, $Z_S = Z_L = 50$ Ω
• 3rd order intercept point at output						
• 1 dB gain compression point at output						

## Electrical characteristics

**Table 13** AC characteristics,  $V_{CE} = 1.8$  V,  $f = 10$  GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ma}$ $ S_{21} ^2$	–	13.5	–	dB	$I_C = 15$ mA
• Maximum power gain • Transducer gain			8.5	–		
Noise figure	$NF_{min}$ $G_{ass}$		1.85	–	dBm	$I_C = 8$ mA
• Minimum noise figure • Associated gain			9	–		
Linearity	$OIP_3$ $OP_{1dB}$		16	–	dBm	$I_C = 15$ mA, $Z_S = Z_L = 50$ Ω
• 3rd order intercept point at output • 1 dB gain compression point at output			0	–		

Note:  $G_{ms} = |S_{21}/S_{12}|$  for  $k < 1$ ;  $G_{ma} = |S_{21}/S_{12}|/(k - (k^2 - 1)^{1/2})$  for  $k > 1$ . In order to get the  $NF_{min}$  values stated in this chapter, the test fixture losses have been subtracted from all measured results.  $OIP_3$  value depends on termination of all intermodulation frequency components. Termination used for this measurement is 50 Ω from 0.2 MHz to 12 GHz.

## Electrical characteristics

## 3.4

## Characteristic DC diagrams



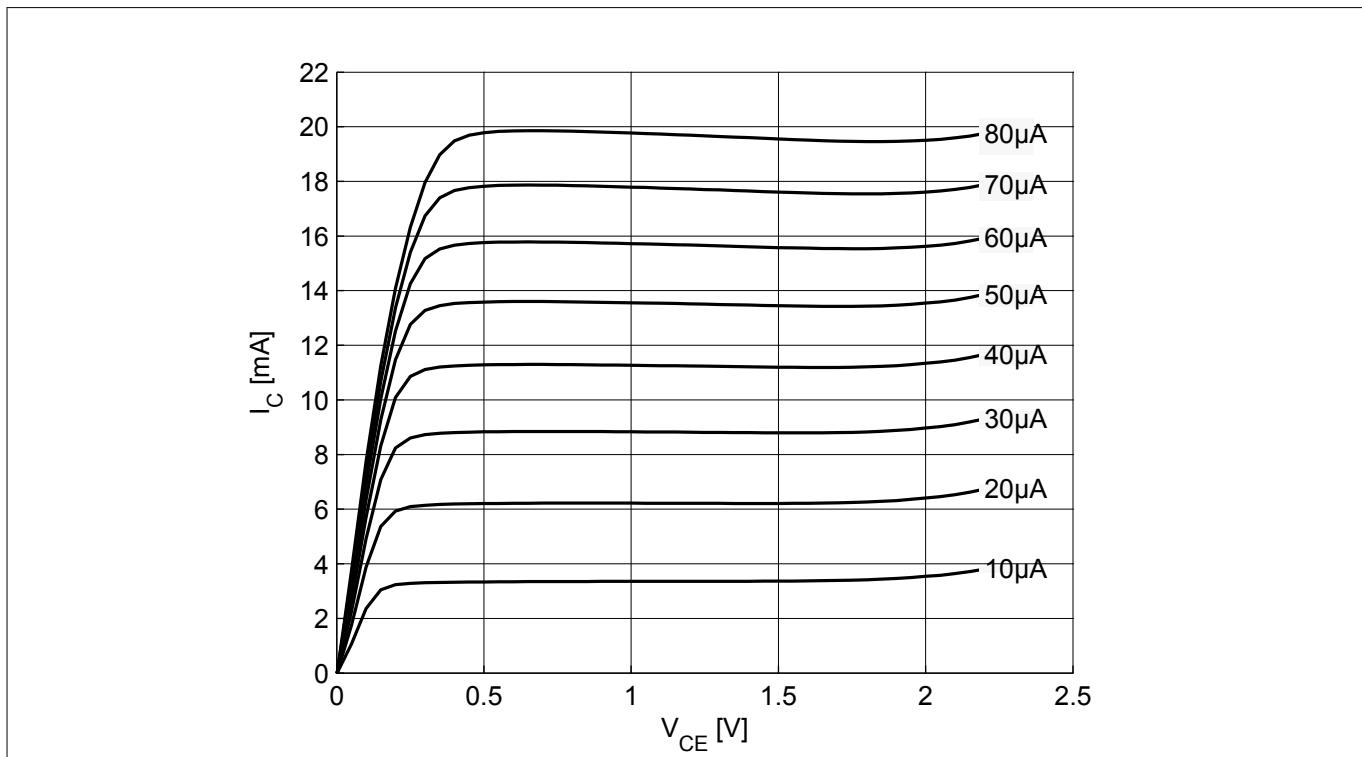
Figure 3 Collector current vs. collector emitter voltage  $I_C = f(V_{CE})$ ,  $I_B$  = parameter


Figure 4

DC current gain  $h_{FE} = f(I_C)$ ,  $V_{CE} = 1.8$  V

## Electrical characteristics

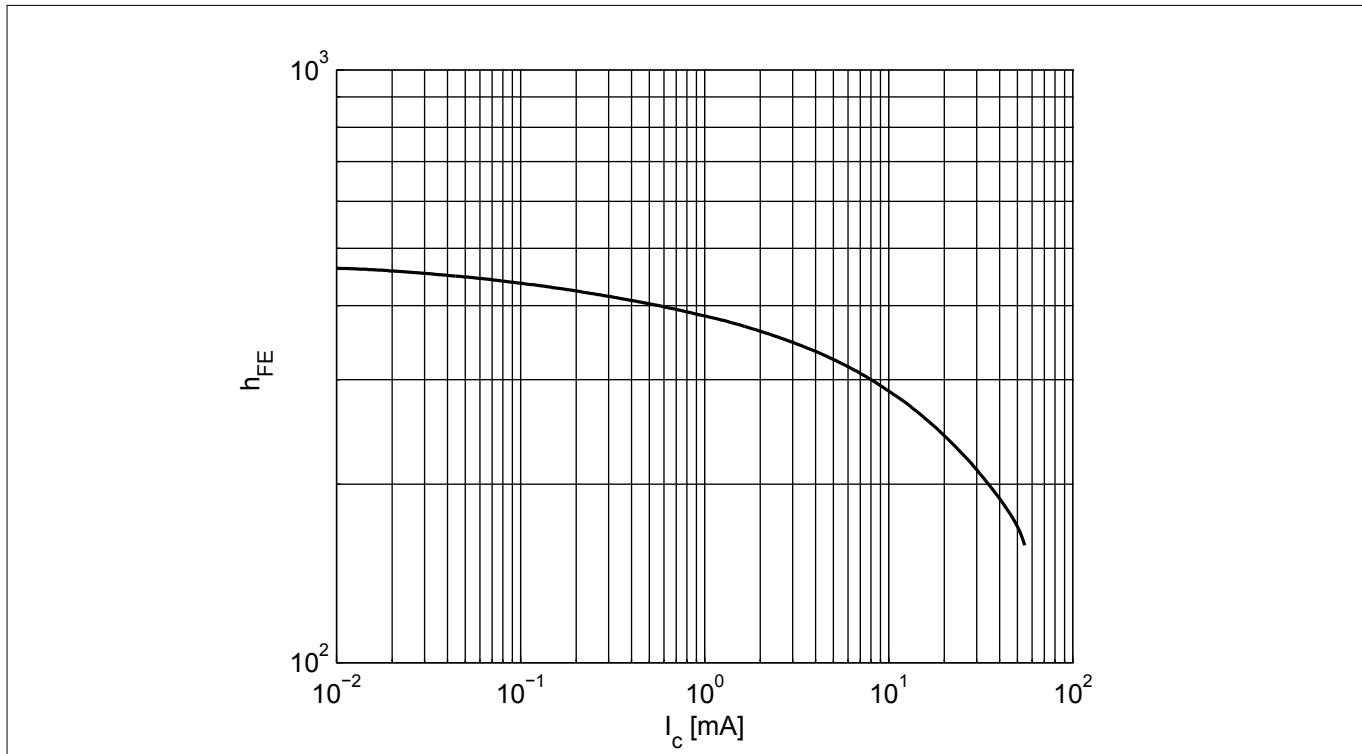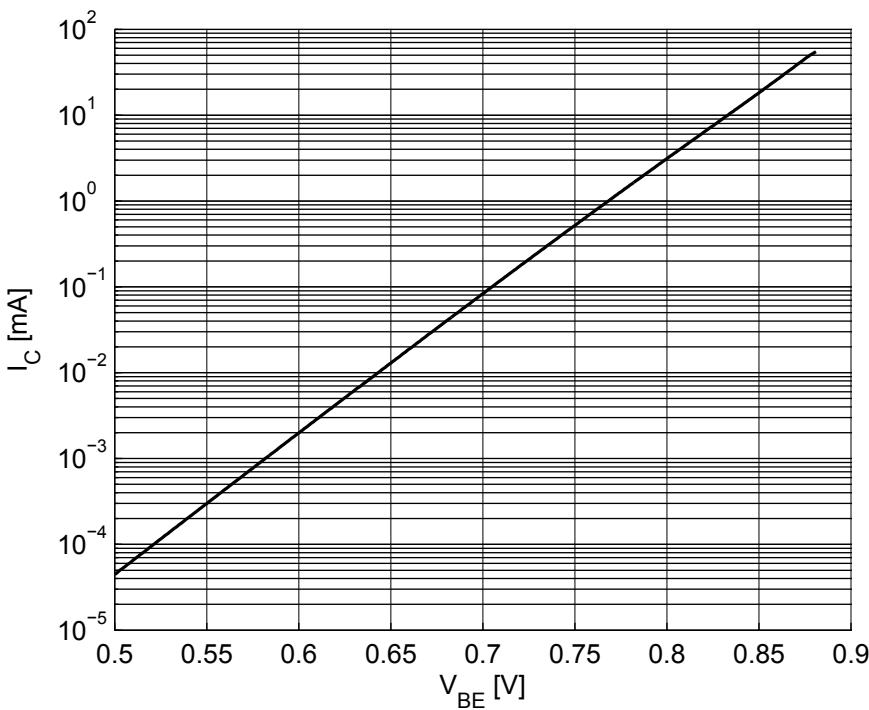

**Figure 5** Collector current vs. base emitter forward voltage  $I_C = f(V_{BE})$ ,  $V_{CE} = 1.8$  V

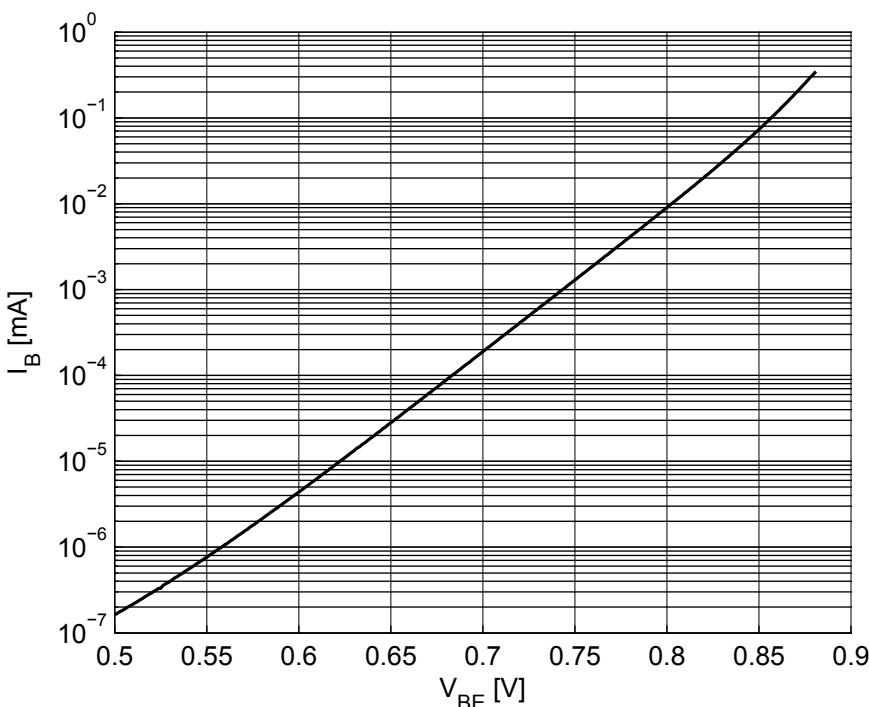

**Figure 6** Base current vs. base emitter forward voltage  $I_B = f(V_{BE})$ ,  $V_{CE} = 1.8$  V

## Electrical characteristics

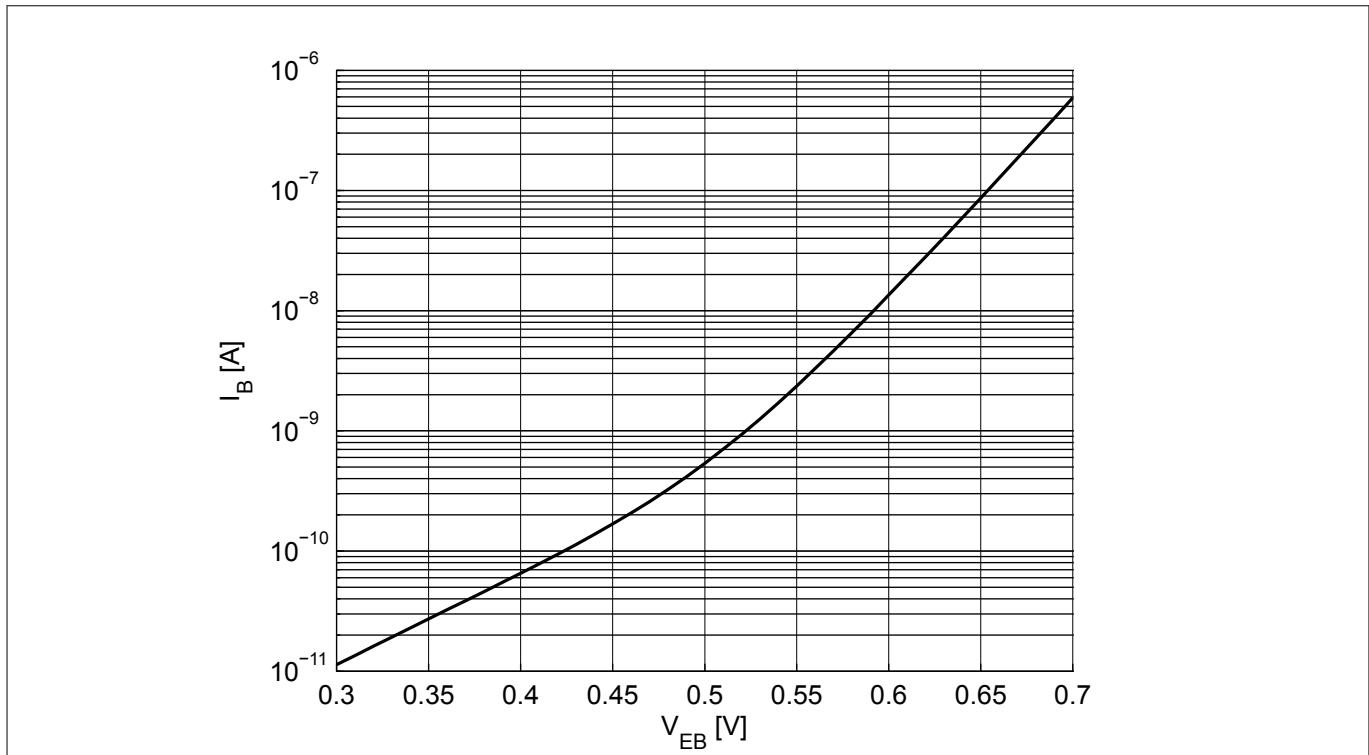



Figure 7

Base current vs. base emitter reverse voltage  $I_B = f(V_{EB})$ ,  $V_{CE} = 1.8$  V


## Electrical characteristics

## 3.5

## Characteristic AC diagrams

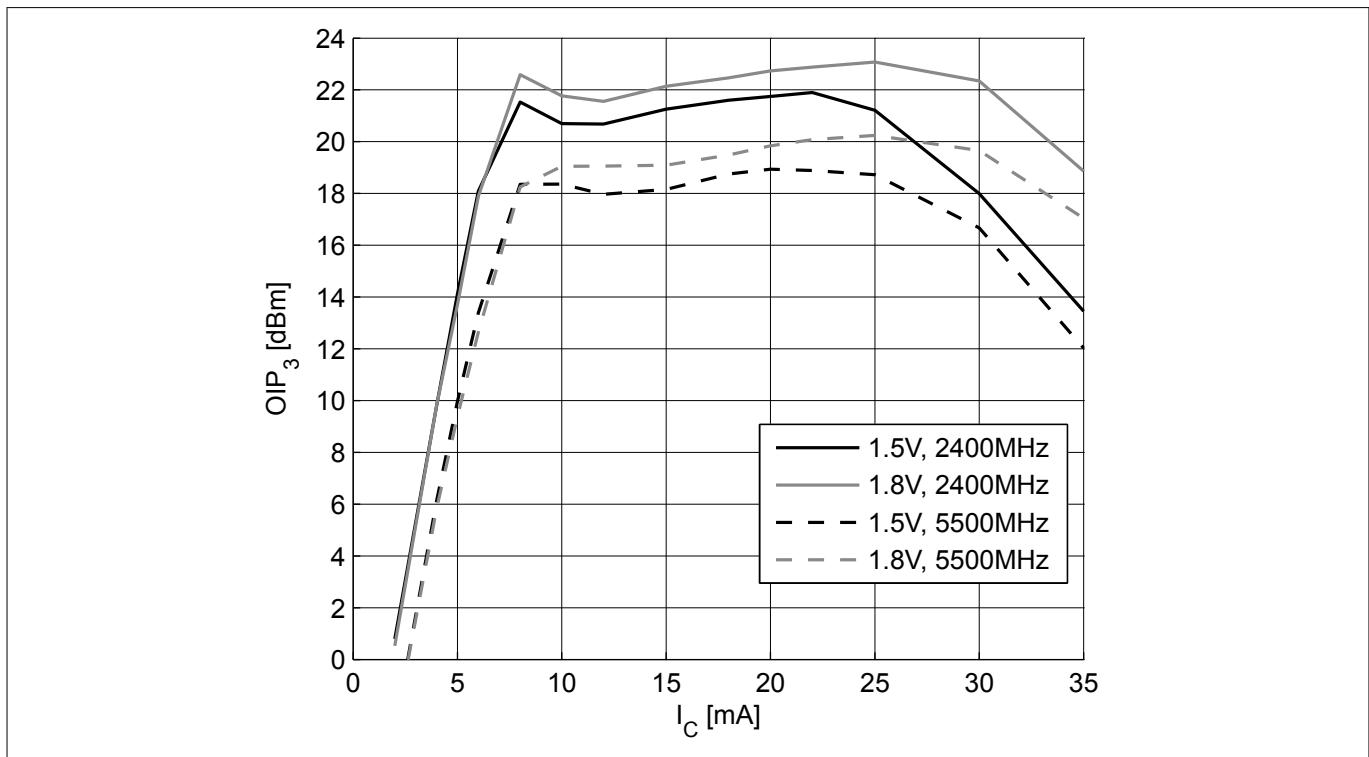

**Figure 8** 3rd order intercept point at output  $OIP_3 = f(I_C)$ ,  $Z_S = Z_L = 50 \Omega$ ,  $V_{CE}$ ,  $f$  = parameters

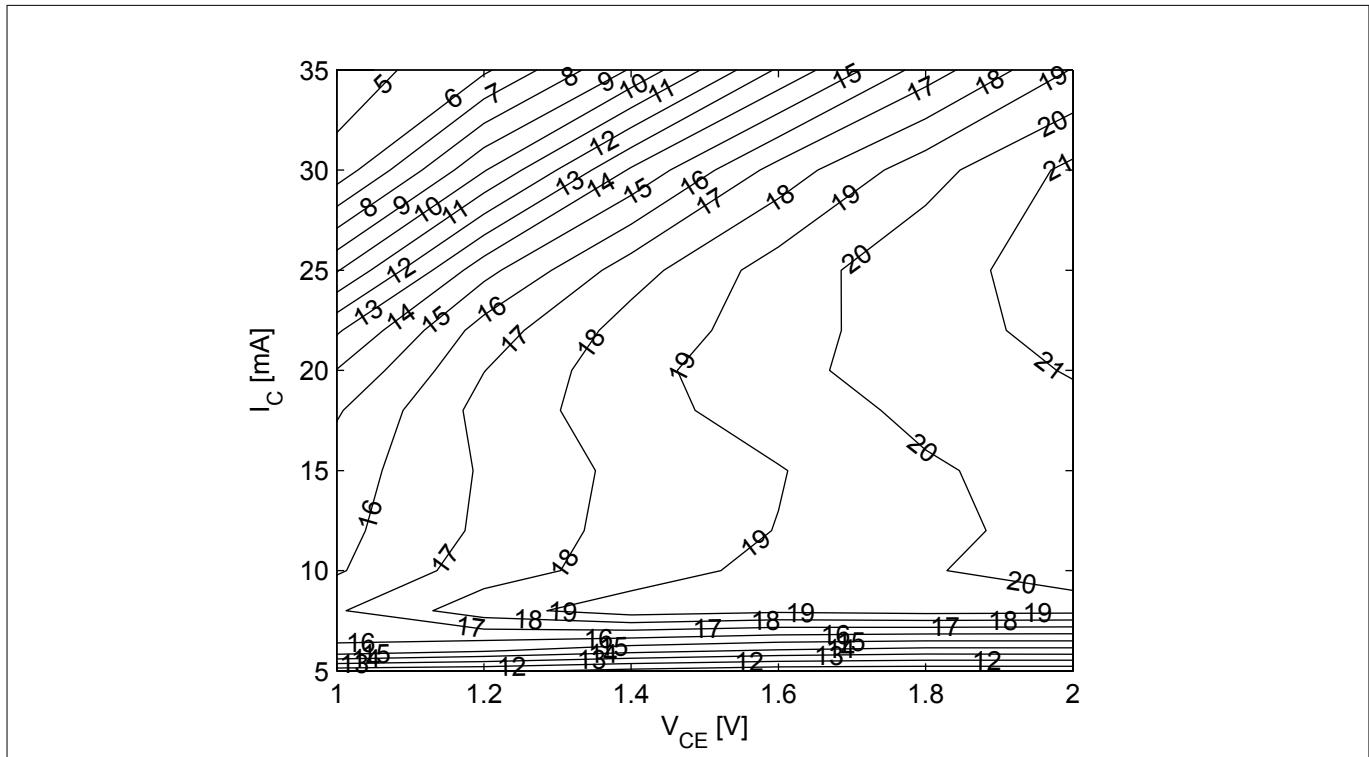

**Figure 9** 3rd order intercept point at output  $OIP_3$  [dBm] =  $f(I_C, V_{CE})$ ,  $Z_S = Z_L = 50 \Omega$ ,  $f = 5.5$  GHz

## Electrical characteristics

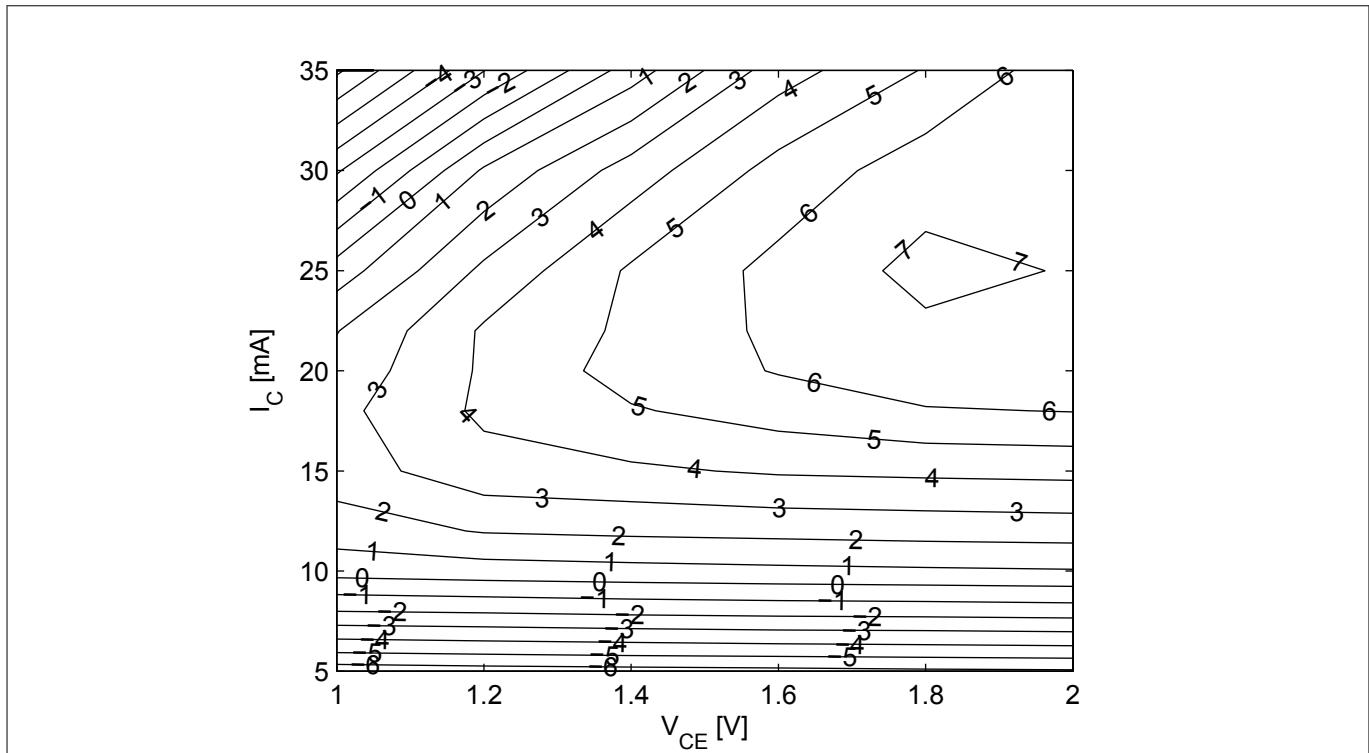


Figure 10

Compression point at output  $OP_{1dB}$  [dBm] =  $f(I_C, V_{CE})$ ,  $Z_S = Z_L = 50 \Omega$ ,  $f = 5.5$  GHz

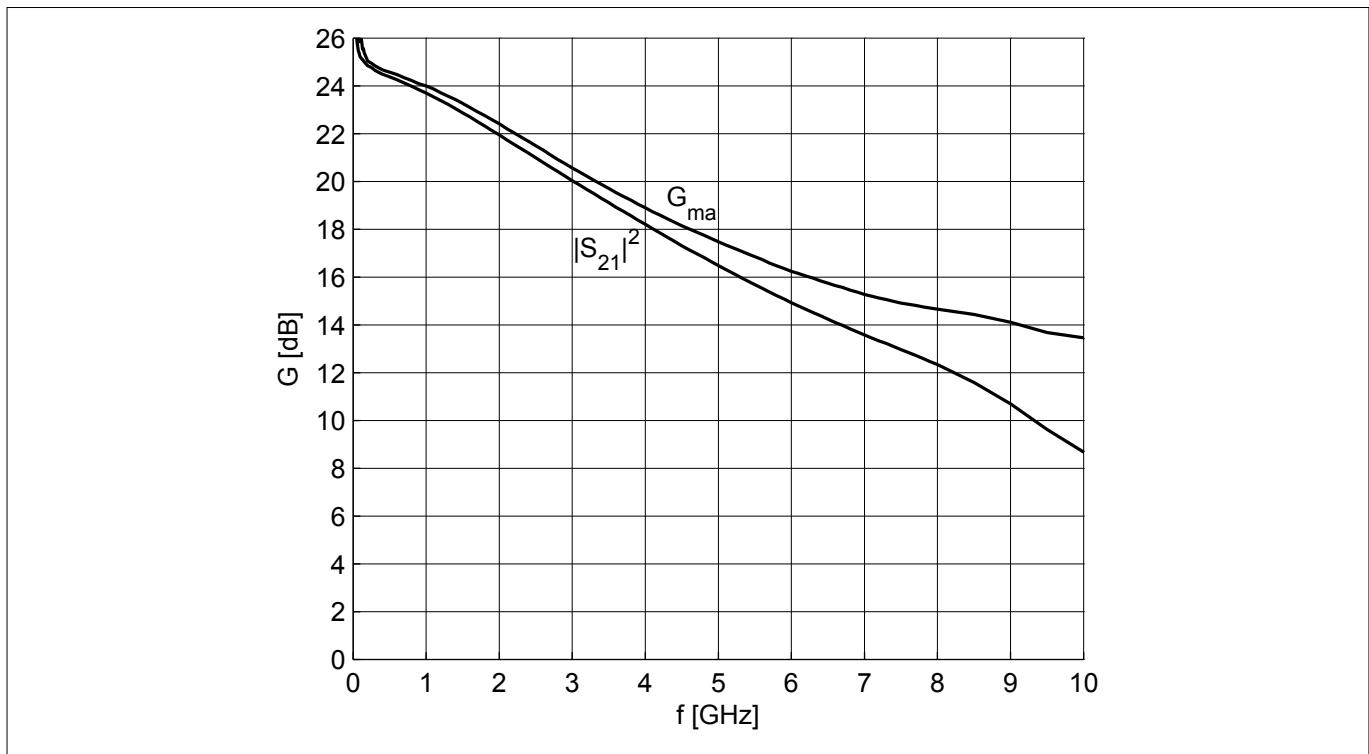
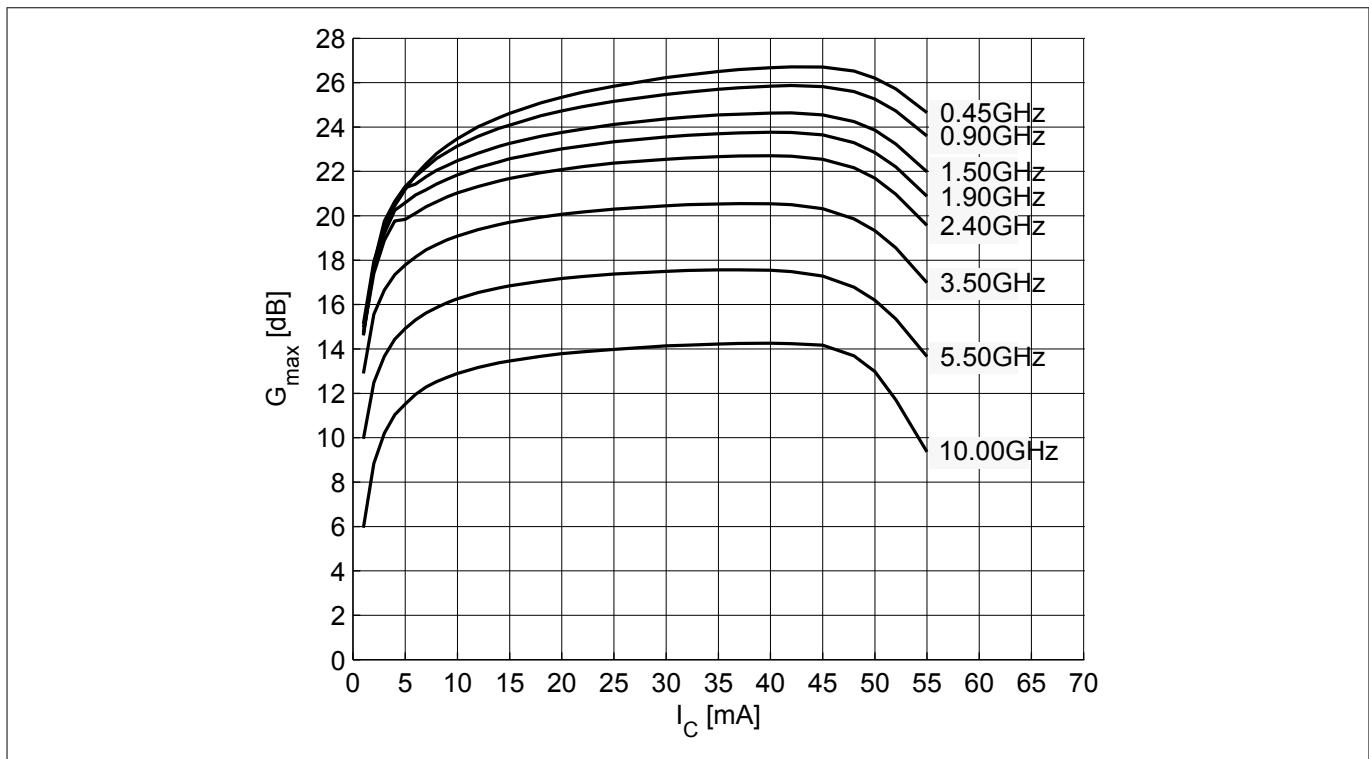
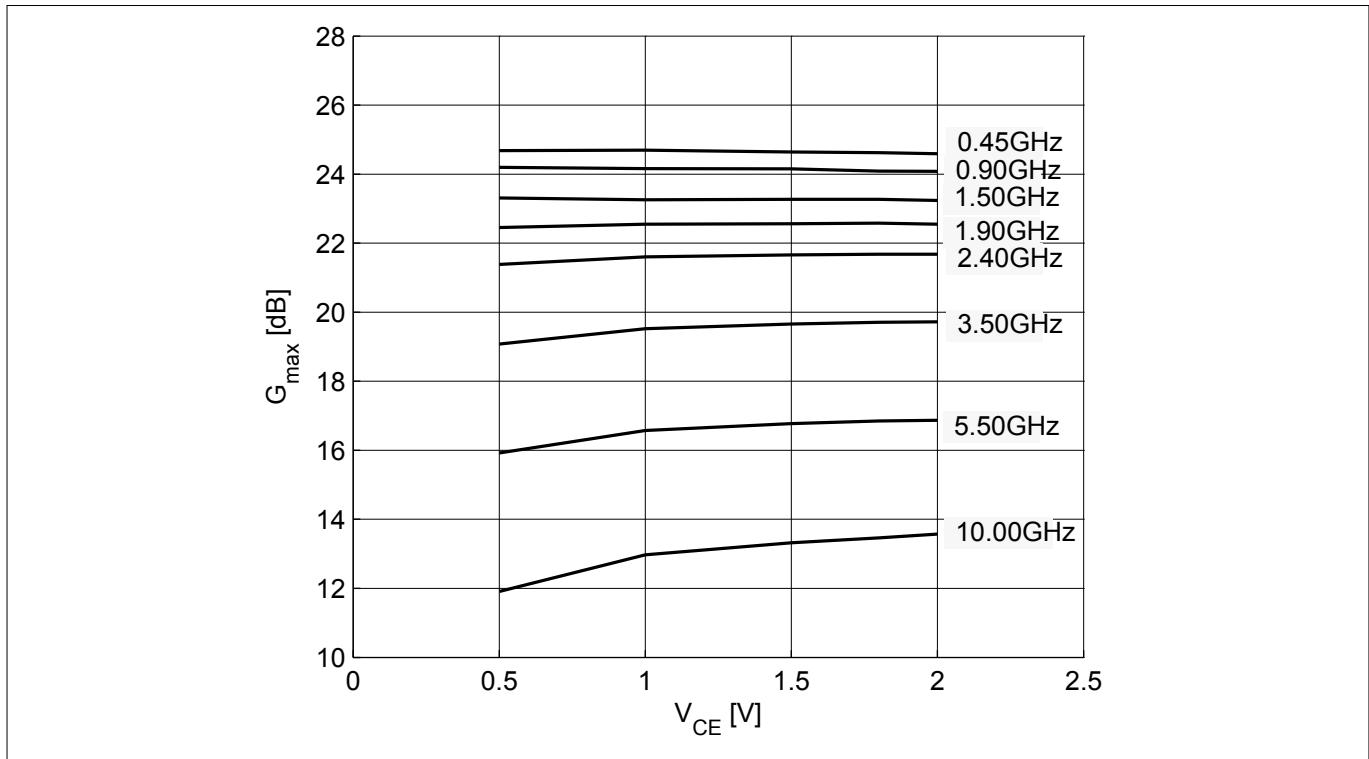



Figure 11

Gain  $G_{ma}$ ,  $|S_{21}|^2 = f(f)$ ,  $V_{CE} = 1.8$  V,  $I_C = 15$  mA


## Electrical characteristics

**Figure 12** Maximum power gain  $G_{\max} = f(I_C)$ ,  $V_{CE} = 1.8$  V,  $f$  = parameter in GHz**Figure 13** Maximum power gain  $G_{\max} = f(V_{CE})$ ,  $I_C = 15$  mA,  $f$  = parameter in GHz

### Electrical characteristics

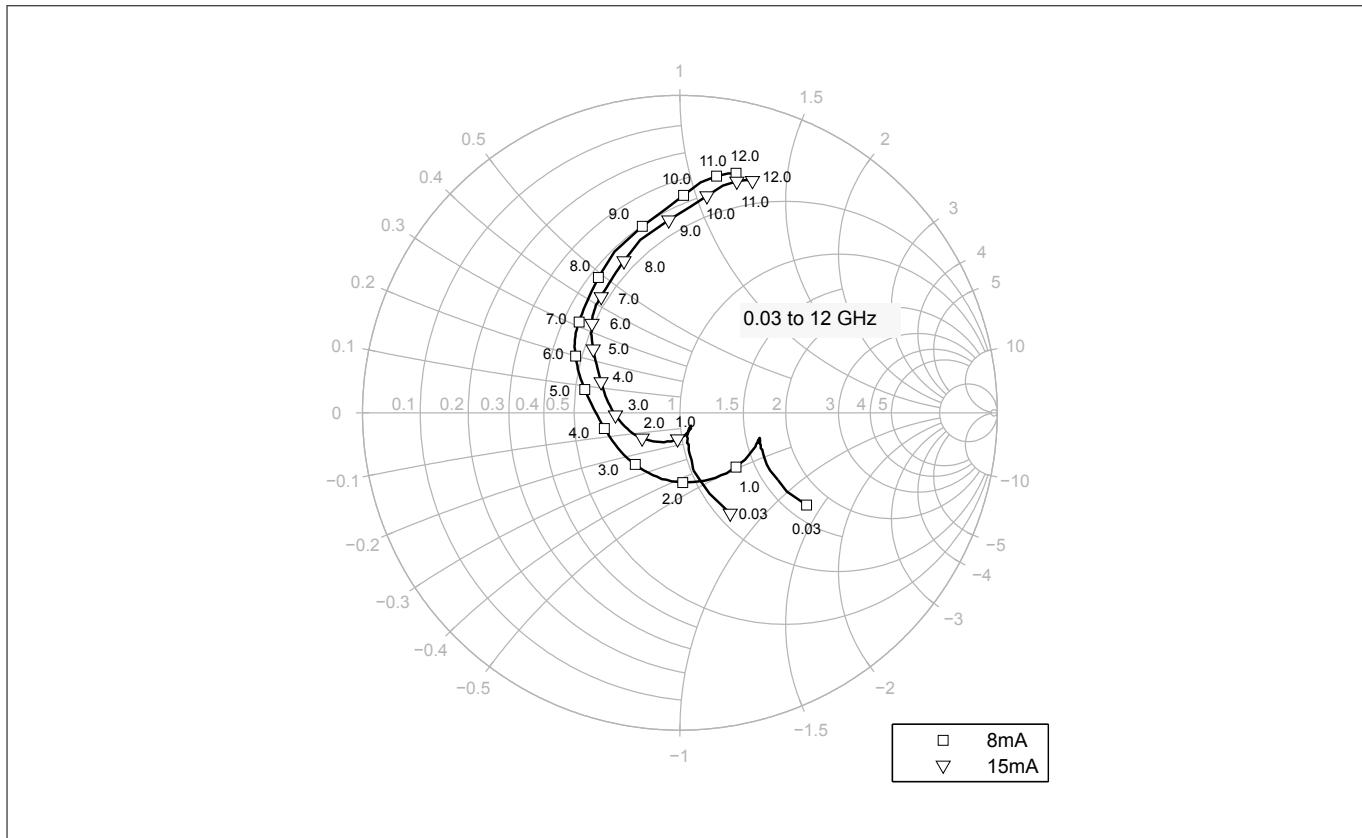


**Figure 14**      **Input reflection coefficient  $S_{11} = f(f)$ ,  $V_{CE} = 1.8 \text{ V}$ ,  $I_C = 8 / 15 \text{ mA}$**

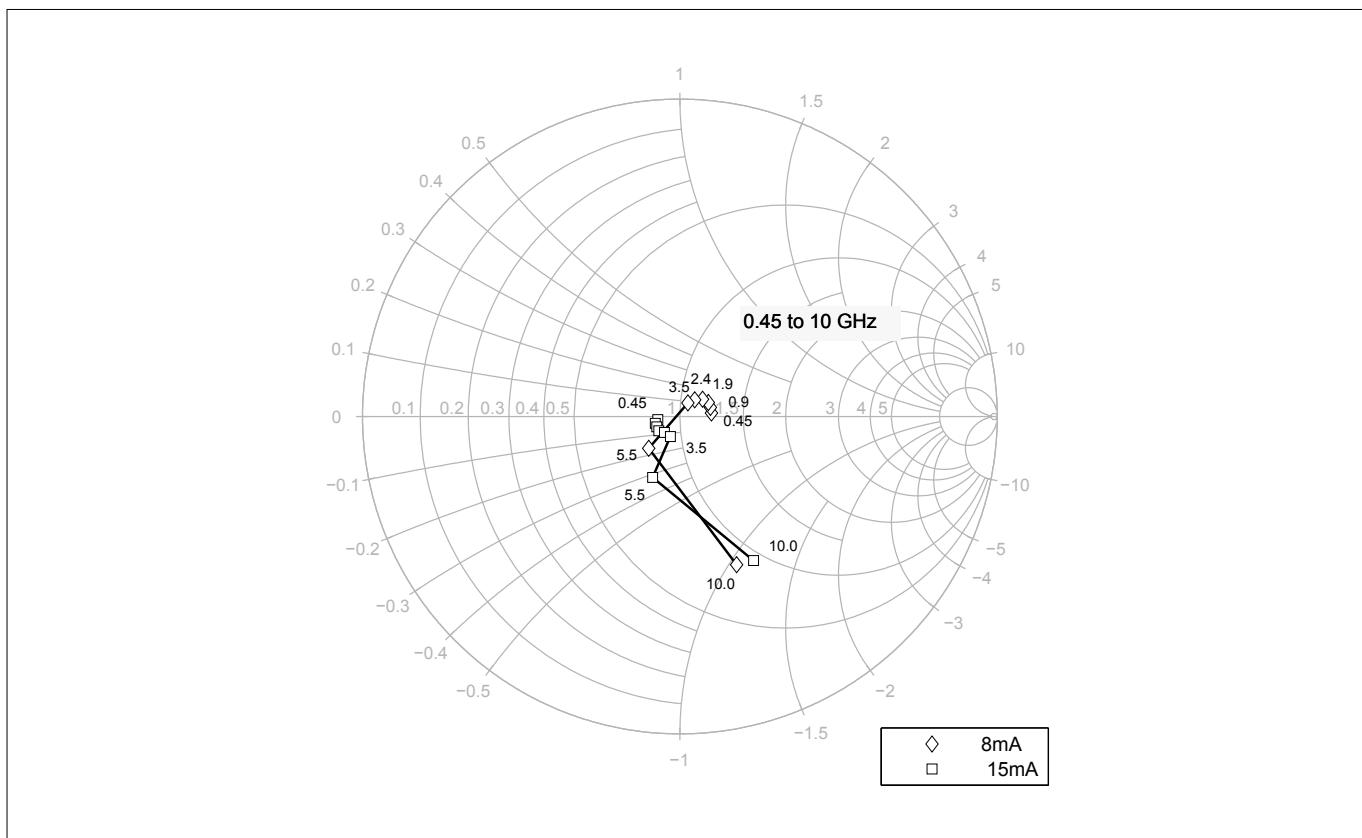


**Figure 15**

**Source impedance for minimum noise figure  $Z_{S,\text{opt}} = f(f)$ ,  $V_{CE} = 1.8 \text{ V}$ ,  $I_C = 8 / 15 \text{ mA}$**

## Electrical characteristics

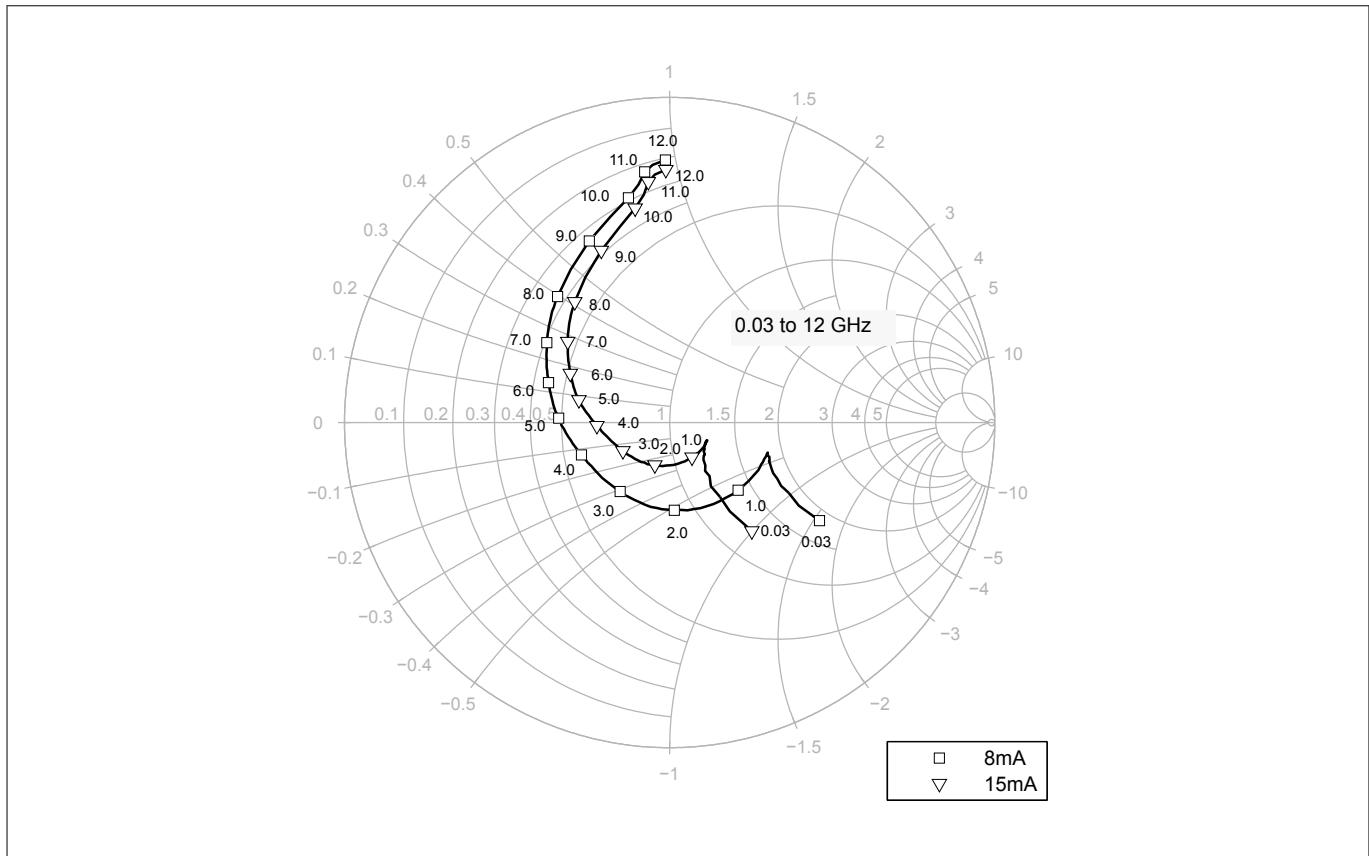

**Figure 16**      **Output reflection coefficient  $S_{22} = f(f)$ ,  $V_{CE} = 1.8$  V,  $I_C = 8 / 15$  mA**

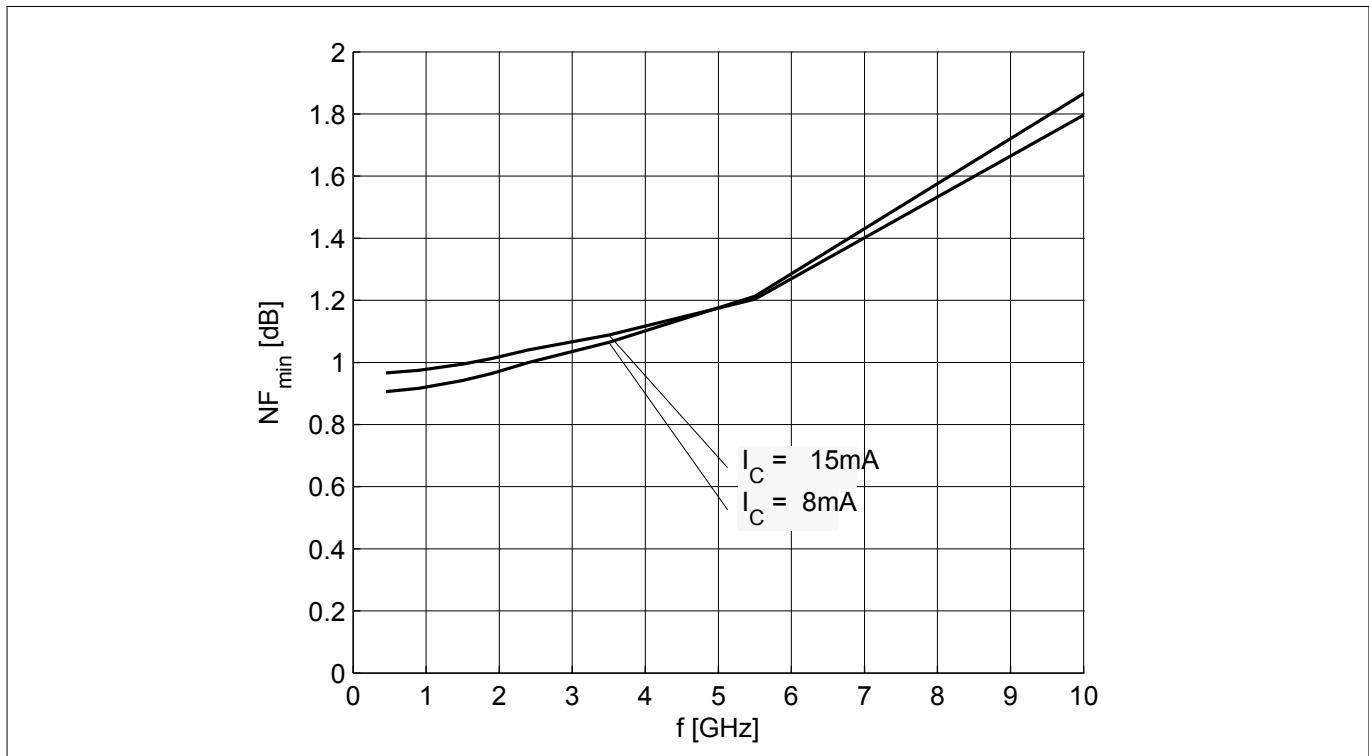

**Figure 17**

**Noise figure  $NF_{min} = f(f)$ ,  $V_{CE} = 1.8$  V,  $Z_S = Z_{S,opt}$ ,  $I_C = 8 / 15$  mA**

## Electrical characteristics

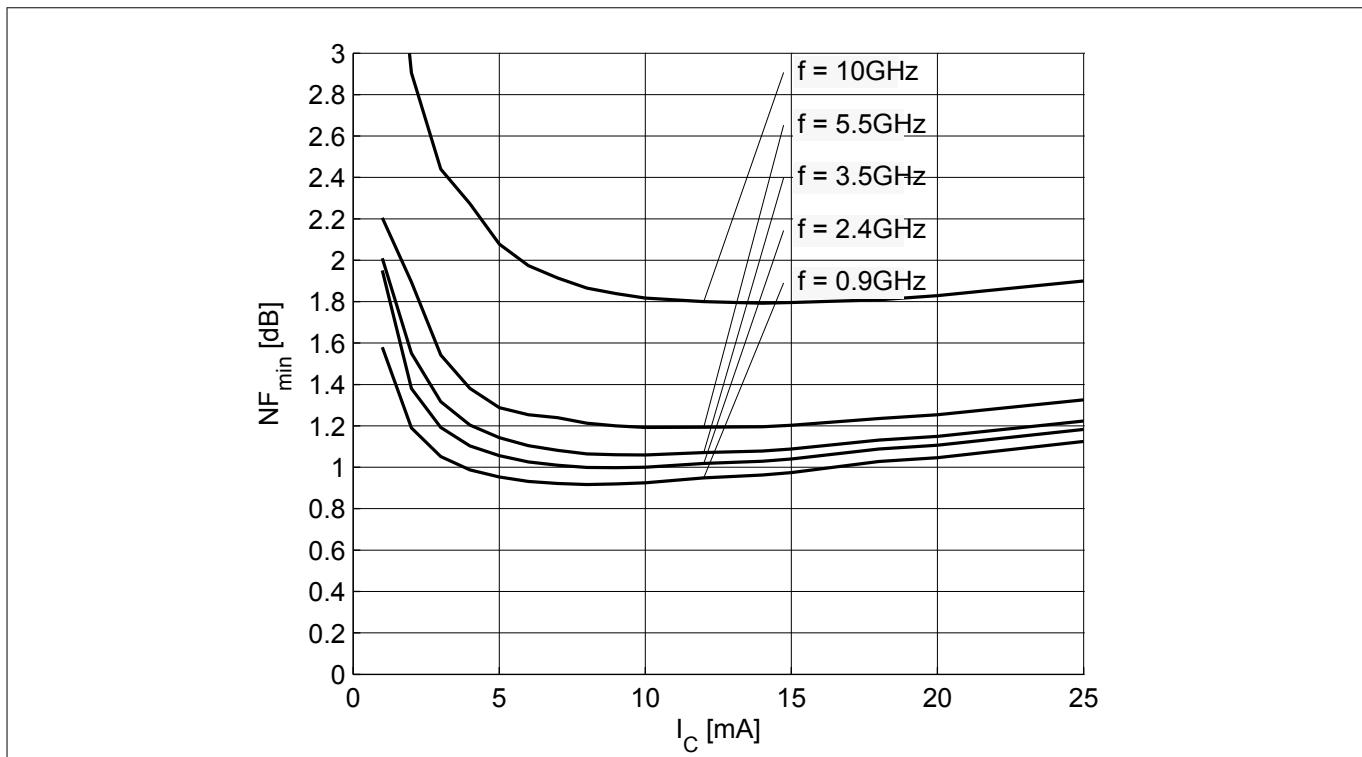


Figure 18 Noise figure  $NF_{min} = f(I_C)$ ,  $V_{CE} = 1.8\text{ V}$ ,  $Z_S = Z_{S,opt}$ ,  $f = \text{parameter in GHz}$

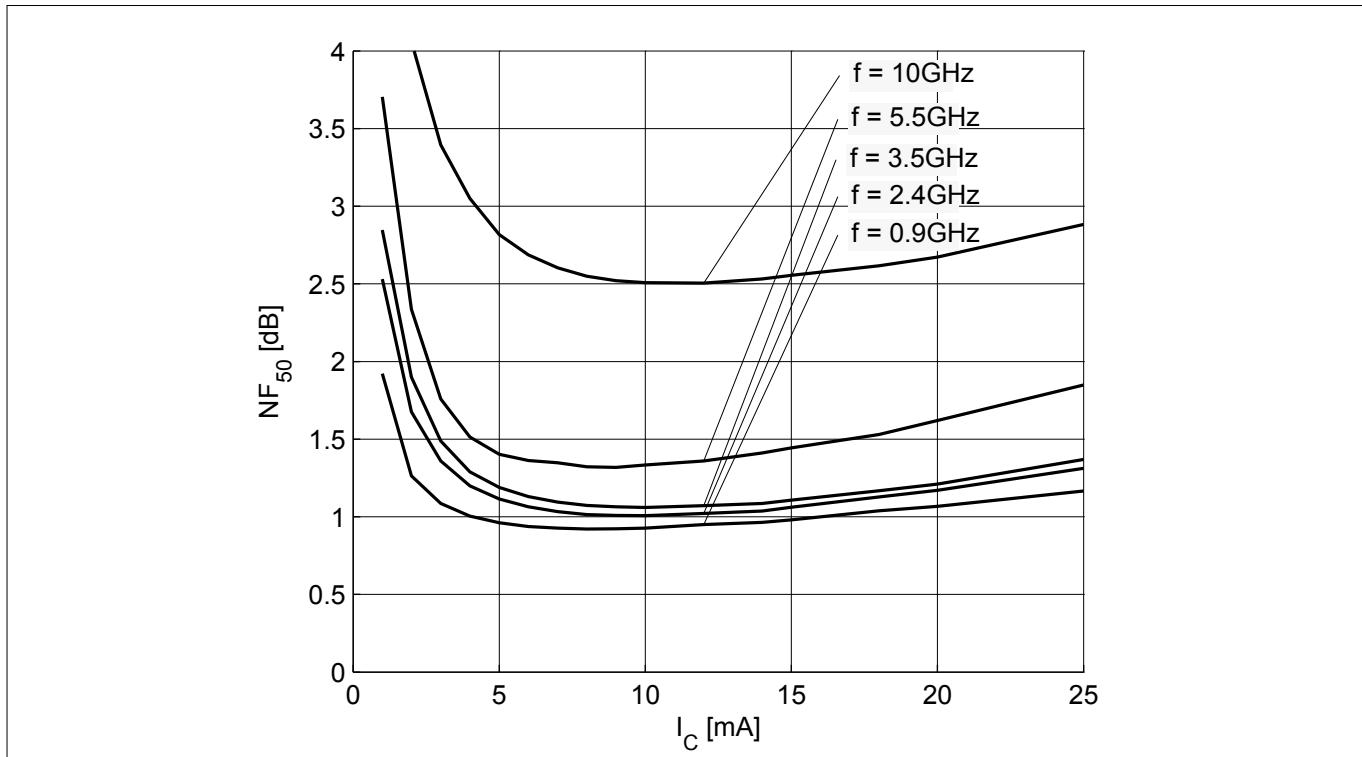


Figure 19 Noise figure  $NF_{50} = f(I_C)$ ,  $V_{CE} = 1.8\text{ V}$ ,  $Z_S = 50\Omega$ ,  $f = \text{parameter in GHz}$

Note:

The curves shown in this chapter have been generated using typical devices but shall not be considered as a guarantee that all devices have identical characteristic curves.  $T_A = 25^\circ\text{C}$ .

## Package information SOT343

4

## Package information SOT343

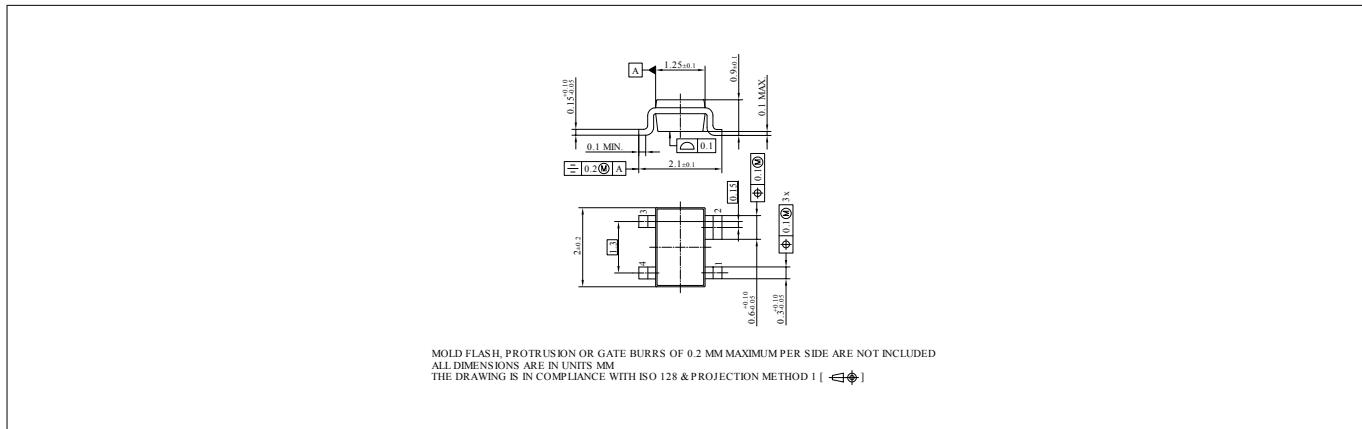


Figure 20 Package outline

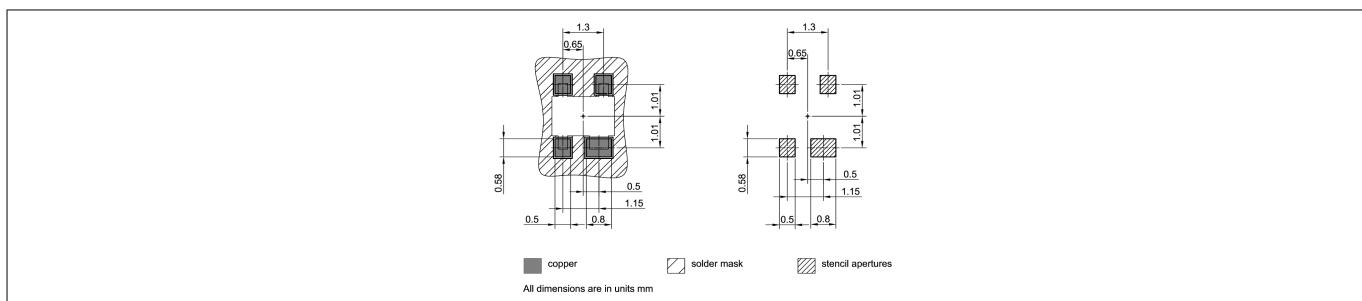


Figure 21 Foot print

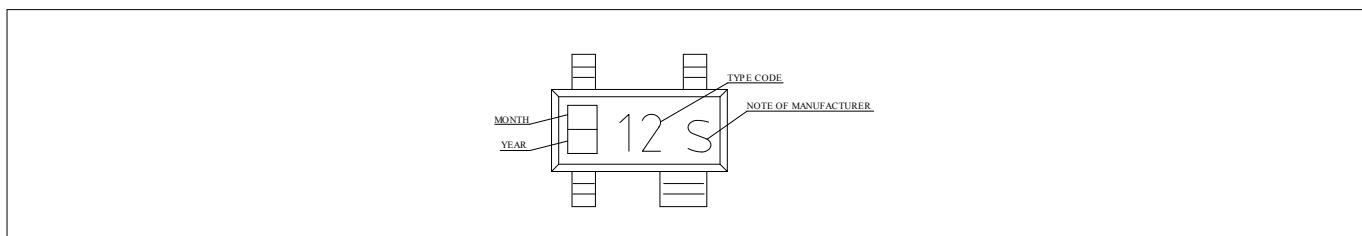


Figure 22 Marking layout example

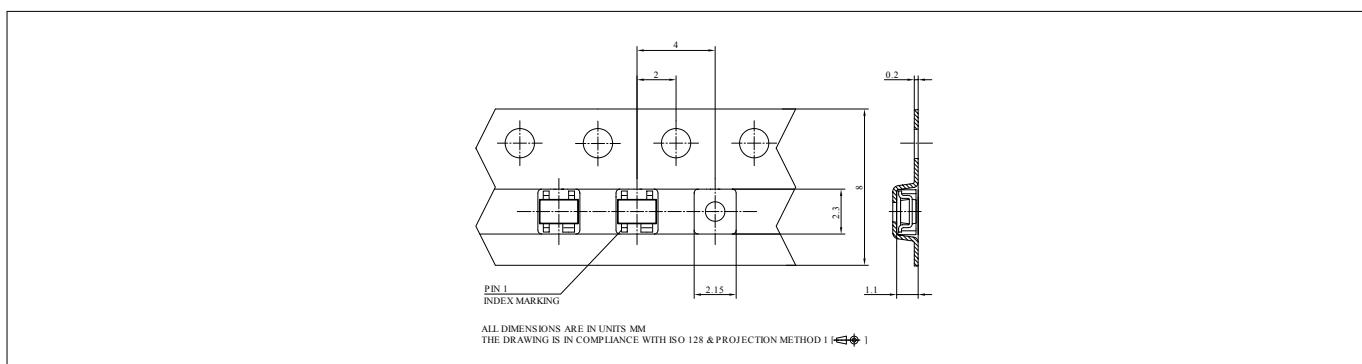


Figure 23 Tape dimensions

**Revision history****Revision history**

<b>Document version</b>	<b>Date of release</b>	<b>Description of changes</b>
2.0	2018-26-09	New datasheet layout.

## **Trademarks**

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2018-09-26**

**Published by**

**Infineon Technologies AG  
81726 Munich, Germany**

**© 2018 Infineon Technologies AG  
All Rights Reserved.**

**Do you have a question about any aspect of this document?**

**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**Document reference  
IFX-yak1518781510491**

## **IMPORTANT NOTICE**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

## **WARNINGS**

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for RF Bipolar Transistors category:***

***Click to view products by Infineon manufacturer:***

Other Similar products are found below :

[MAPRST0912-50](#) [MCH4016-TL-H](#) [MMBT5551-G](#) [MRF10120](#) [MRF587](#) [MAPRST0912-350](#) [MRF10031](#) [NSVF4009SG4T1G](#) [MRF10350](#)  
[HFA3101B](#) [MCH4015-TL-H](#) [BF888H6327XTSA1](#) [MMBT2222A-G](#) [BFP196WH6327XTSA1](#) [BFP405FH6327XTSA1](#)  
[BFP640ESDH6327XTSA1](#) [BFR193L3E6327XTMA1](#) [BFS483H6327XTSA1](#) [BFU550WX](#) [BFU550XRR](#) [NSVF4020SG4T1G](#)  
[NSVF6003SB6T1G](#) [MMBT5179](#) [BFP420FH6327XTSA1](#) [BFP740FESDH6327XTSA1](#) [BFP 842ESD H6327](#) [BFR181E6327HTSA1](#)  
[BFR181WH6327XTSA1](#) [BFR182E6327HTSA1](#) [BFR193E6327HTSA1](#) [BF776H6327XTSA1](#) [BFP181E7764HTSA1](#) [BFP183WH6327XTSA1](#)  
[BFP720H6327XTSA1](#) [BFR182WH6327XTSA1](#) [BFR380FH6327XTSA1](#) [BFU590GX](#) [BFR340FH6327XTSA1](#) [STGWT30HP65FB](#)  
[NE68939-T1-A](#) [NSVF3007SG3T1G](#) [BFR 380F H6327](#) [BFS20.215](#) [BFP 650F H6327](#) [BFP 420 H6433](#) [BFP 420 H6740](#) [BFP 420 H6801](#)  
[BFQ790H6327XTSA1](#) [BFR 193F H6327](#) [BFT25.215](#)