Construction

Glass cartridge, silvered caps

**Specification** 

DIN 41571, Sheet 2.

Marking

Manufacturers Mark, Rated voltage, Rated current, Characteristic symbol category C.

Range

800 mA to 1-25 A

Voltage Rating

250 V ac 250 V dc.

**Breaking Capacity** 

20 A dc at 250 V. DIN CATEGORY C. 80A ac at 250 V.

Endurance

1 h at 1.5 ln

Service Temperature

0°C to + 35°C.

**Performance Data** 

Current

Total operating time

min 60 mins

1.5 In 2.1 In 4 In 10 In

60 ms 20 ms 2 mins 2 s 70 ms

Approximate Weight

0.8 kg per 1000 fuselinks.


5.2 mm Ø ± .0.205 in  $^{+0.004}_{-0.008}$ 

**Preferred Ratings** 

800 mA 1 A 1.25 A

Other ratings may be available.

## Performance Envelope — Combined Ratings

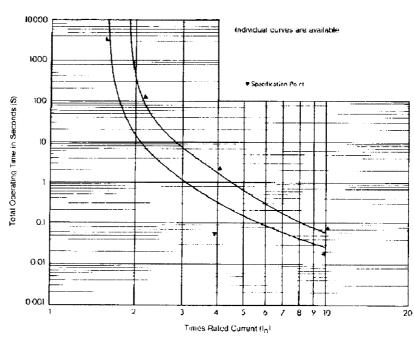

All goods are sold and services and advice rendered in comparting therewish, subject only to the Compare's Standard Conditions of Salar

Kenneth E Beswick Ltd

Alert Works, Frome, Somerset BA11.1PP, England Telephone Frome (0373) 64311 Telex 449196 Alert G Gable BESWICKFUSE FROME

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for eaton manufacturer:

Other Similar products are found below:

BK1-S506-500-R BK1-S506-6-3-R BK1-S506-2-R BK-MDL-3-R MPI4040R4-1R5-R 89096-015 8946K153 8961K155 M22-DL-W-X0 M22-L-R/R M22S-ST-GB12 630NHG3B 63ET 6422 6580 CTX20-16-52LP-R CWL530FI CXM/CO/GP/R/BB 6HD36 6NZ01 714125 MBO-2 ESR5-NO-41-24VAC-DC 7314K36 F02A-1-1/2A F02A-1-1/2AS F02A-1AS F02A-2AS F02A-3/4A F03A250V12A MCR-4 MDA-2-8/10-R MDA-30A MDA-V-1/16 F60C500V10AS F60C500V15AS 7563K84 MDQ-3/16 MDQ-7/10 MDV-1-1/2 MDV-3/8 MDV-4 MDV-6/10 FAZ-C2 MIC-2 MIC-30 80910030 FHL-18-W2-1 8138K20W7V52 8175K12L121C50