

For In-Circuit- and Functional Test (ICT/FCT)


F772

Centers 2,54 mm/100 mil

	Current	Temperature
Standard	5,0 A	-20°... +80° C
H-Version ¹	5,0 A	-40°... +250° C
C-Version	16,0 A	-40°... +250° C

¹ On Request

The F772 is used in dual-stage fixtures together with the F797. The receptacle H772 permits a variable projection height. The receptacle H712 is used for a fixed projection height of 10 mm. This probe is identical to the threaded probe F732.

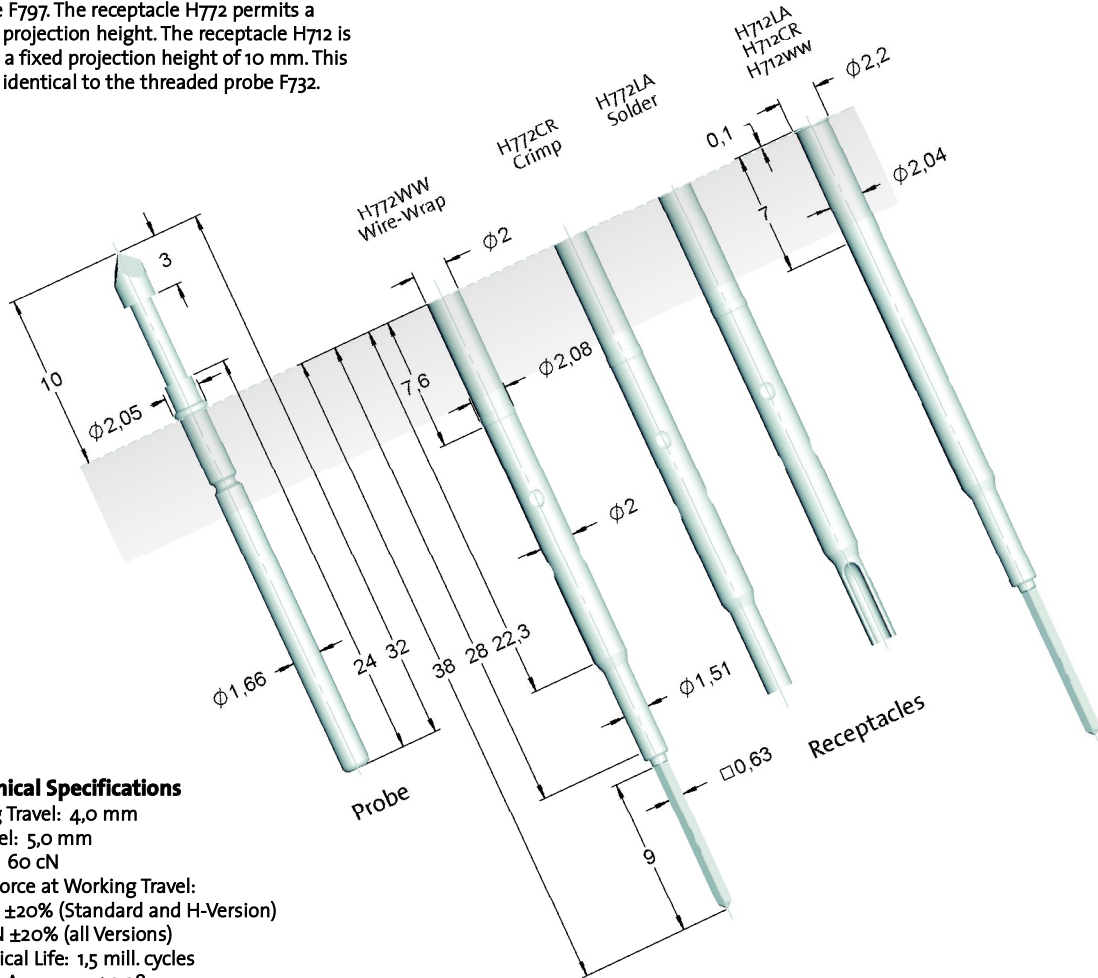

Mechanical Specifications

Working Travel: 4,0 mm
 Full Travel: 5,0 mm
 Preload: 60 cN
 Spring Force at Working Travel:
 150 cN ±20% (Standard and H-Version)
 300 cN ±20% (all Versions)
 Mechanical Life: 1,5 mill. cycles
 Pointing Accuracy: ±0,08 mm

Electrical Specifications

Constant Current: 5,0 - 16,0 A
 Typical Probe Resistance: 25 mOhm
 C-Version: 10 mOhm

Materials and Finishes

Plunger: see Tip Style
 Barrel: Nickel Silver, Gold plated
 Spring: Music Wire, Silver plated
 Receptacle: Nickel Silver, Gold plated

Order Example

F772 05B 200 G 300 H

Type: F772 Tip Diameter: 05B Spring Force: 200 G Special Version: 300 H

Tip Style: 05 Material: B Plunger Finish: G Special Version (optional): H

Material: B = BeCu, S = Steel
Tip Diameter: 2,0 mm = 200
Plunger Finish: G = Gold plated
 L = Longtime gold plated
 N = Nickel plated
Special Version: C = High Current Probe
 H = High Temperature Probe
Receptacle: Order Number see drawing

Projection Height

H772WW/H772CR/H772LA	H712LA/H712CR/H712WW
10,0 - 17,6 mm	10,0 mm

Plunger Tip Style, Material, Finish and Tip Diameter

05 BeCu; G Ø 1,8; 2,0; 2,5 mm	06 BeCu; G Ø 1,5; 1,8; 2,0; 2,5 mm	11 BeCu; G Ø 0,7 mm	12 BeCu; G Ø 1,5 mm	14 Steel; L Ø 2,0 mm
15 BeCu; G Ø 2,0 mm	18 BeCu; G Ø 1,3 mm	21 Steel; L Ø 1,3 mm	32 Steel; N Ø 0,8 mm	33 Steel; L Ø 1,3 mm

High Current Version (C-Version only 300 cN) *new*

06 BeCu; G Ø 2,0 mm	11 BeCu; G Ø 1,0 mm	14 Steel; L Ø 1,3 mm	16 BeCu; G Ø 1,0 mm
-----------------------------------	-----------------------------------	------------------------------------	-----------------------------------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Feinmetall](#) manufacturer:

Other Similar products are found below :

[579-0400](#) [66000-7](#) [R644543000](#) [R921923000](#) [R921930000](#) [R941344000](#) [R948161000](#) [R999351000](#) [1408-4](#) [1533-1](#) [174-R825B-EX](#)
[NYS508-BU](#) [1680](#) [174-R819B-EX](#) [R644543003](#) [R644543020](#) [R644543021](#) [R921926000](#) [R921931000](#) [R921932000](#) [R921934000](#)
[R929991000](#) [R941460000](#) [R941461000](#) [R941463600](#) [R941920600](#) [R948160000](#) [31B-2-RED](#) [032-0016-023](#) [105-1106-001](#) [108-1000-106](#)
[108-2301-621](#) [111-0707-001](#) [66001-9](#) [7013](#) [1395080-1](#) [930166100](#) [NYS508-GR](#) [NYS508-W](#) [NYS508-Y](#) [NYS511-R](#) [BP30-2BR10-B PKG](#)
[BP30-10-WT](#) [BP30-2BR-B PKG](#) [BP30Y-1 PKG](#) [R941049000](#) [R941340000](#) [R948141029](#) [R644543022](#) [R948142000](#)