


## For In-Circuit- and Functional Test (ICT/FCT)

**Centers 1,27 mm/50 mil**

	Current	Temperature
Standard	2,0 A	-20°... +80° C

# F788

The F788 is often combined with the F703 (75 mil), F585 (100 mil) and F786 (100 mil). The receptacle H787 allows a variable projection height. For a fixed projection height of 16,0 mm the receptacle H768 is used. The receptacles can also be ordered with 500 mm preattached stranded wire (0,08 mm<sup>2</sup>/AWG28) using the part number H787LI. Delivery time on request.

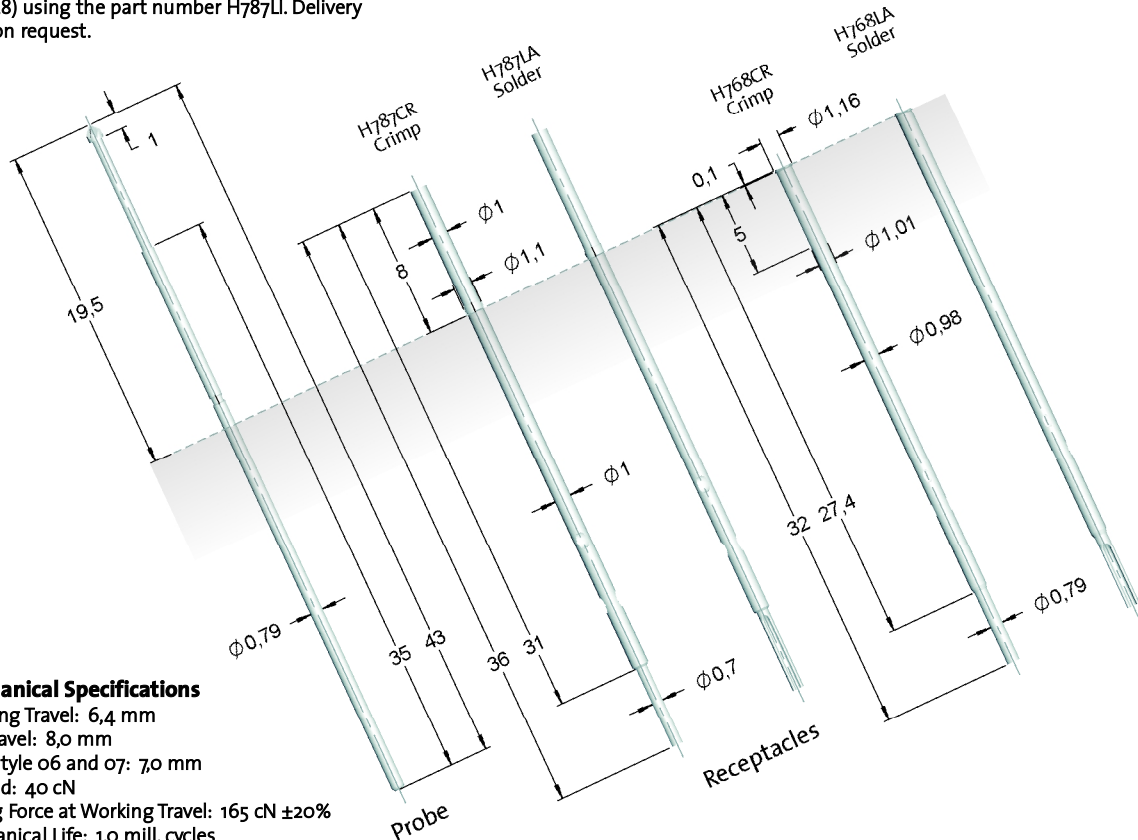

### Mechanical Specifications

Working Travel: 6,4 mm

Full Travel: 8,0 mm

Tip Style 06 and 07: 7,0 mm

Preload: 40 cN

Spring Force at Working Travel: 165 cN ±20%

Mechanical Life: 1,0 mill. cycles

Pointing Accuracy: ±0,1 mm

### Electrical Specifications

Maximum Continuous Current: 2,0 A

Typical Probe Resistance: 35 mOhm

### Materials and Finishes

Plunger: see Tip Style

Barrel: Bronze, Gold plated

Spring: Music Wire, Silver plated

Receptacle: Bronze, Gold plated (H768)

Nickel Silver, Gold plated (H787)

### Projection Height

H787CR	H787LA	H768CR	H768LA
11,5 - 19,5 mm	11,5 - 19,5 mm	16,0 mm	16,0 mm


### Order Example

**F788** **06 B** **090 G** **165**

Type                      Tip Diameter                      Spring Force  
 Tip Style                      Material                      Plunger Finish

**Material:** B = BeCu, S = Steel  
**Tip Diameter:** 0,9 mm = 090  
**Plunger Finish:** G = Gold plated, L = Longtime gold plated  
**Receptacle:** Order Number see drawing

### Plunger Tip Style, Material, Finish and Tip Diameter

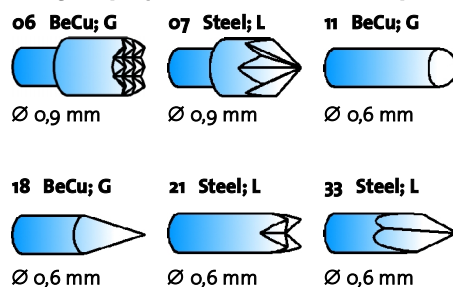

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Test Sockets](#) category:*

*Click to view products by [Feinmetall](#) manufacturer:*

Other Similar products are found below :

[AXS-5032-04-02](#) [AXS-3225-04-06](#) [AXS-7050-04-12](#) [5662](#) [BP30-10-B](#) [BP30GNN-1 PKG](#) [BP30-10Y-1 PKG](#) [AXS-7050-04-01](#) [AXS-5032-04-06](#) [AXS-2520-04-01](#) [AXS-5032-04-04](#) [930308101](#) [931714101](#) [15.0084-21](#) [563-0500](#) [20.1020-21](#) [20-313137](#) [20-313139](#) [20-313144](#) [20-313140](#) [20-313143](#) [22.1042](#) [+ 22.2370-22](#) [23.1010-23, 24, 25, 26, 27](#) [23.3060-23](#) [24.0160-1+25.0035](#) [24.0160-4+25.0035](#) [24.116-22](#) [5281](#) [5279](#) [450-3704-01-06-00](#) [AXS-3225-04-04](#) [AXS-3225-04-10](#) [AXS-7550-06-03](#) [AXS-7550-06-05](#) [269RB](#) [2713BB](#) [BP30BN-1 PKG](#) [BP30RN-1 PKG](#) [571-0200](#) [450-3422-01-06-00](#) [450-3888-01-04-00](#) [BP30GP10](#) [571-0400](#) [571-0600](#) [66.9131-23](#) [66.9427-22](#) [BP21-2BRN-B](#) [PKG](#) [930058104](#) [930103102](#) [930103188](#)