


# TDH-7060/7061

## ENGINEERING DATA SHEET

ON OPERATE-ADJUSTABLE PERIOD  
4 PDT, 10 AMP

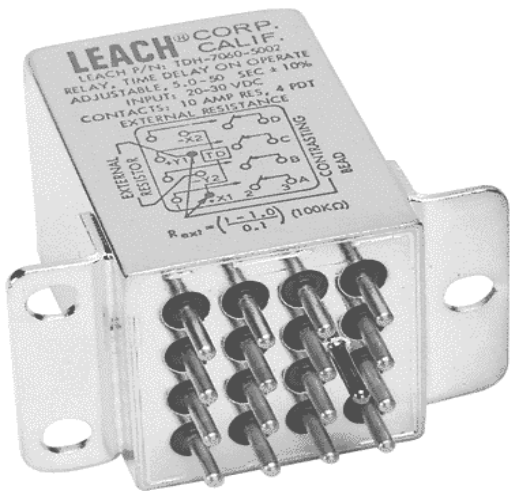

### APPLICATION NOTE:

[101](#)

### APPLICABLE SOCKET:

[SO-1056-8691](#)

## FEATURES

- Small size and weight
- High-reliability design
- Hermetically sealed
- High transient immunity
- Long life
- Low-power consumption
- Adjustable Time Delays
- Reverse Polarity Protection

## PRINCIPLE TECHNICAL CHARACTERISTICS

Seal: Hermetic Tested per MIL-STD-883, Method 1014 Condition B, C

Finish: per MIL-T-10727

Terminals:

TDH 7061 (Tin Plate)

TDH 7060 (Gold Plate)

Weight

$1 \times 10^{-8}$  atm, cm<sup>3</sup>/s max leakage

Tin Plate

Solder-lug

Plug-In

3.0 Ounce max.

## DESCRIPTION

The TDH-7060/61 Time Delay Relays have been designed with thick film hybrid microelectronics timing circuits and MIL-PRF-6106 relays, packaged in a hermetically sealed military style enclosure. The TDH-7060/61 series are designed to withstand severe environmental conditions encountered in military/aerospace applications. These relays are suited for use in power control, communication circuits and many other applications where power switching and high reliability are required over a wide temperature range.



Featuring **LEACH**® power and control solutions

[www.esterline.com](http://www.esterline.com)

**AMERICAS**  
6900 Orangethorpe Ave.  
P.O. Box 5032  
Buena Park, CA 90622

Tel: (01) 714-736-7599  
Fax: (01) 714-670-1145

**EUROPE**  
2 Rue Goethe  
57430 Sarralbe  
France

Tel: (33) 3 87 97 31 01  
Fax: (33) 3 87 97 96 86

**ASIA**  
Units 602-603 6/F Lakeside 1  
No.8 Science Park West Avenue  
Phase Two, Hong Kong Science Park  
Pak Shek Kok, Tai Po, N.T.  
Hong Kong  
Tel: (852) 2 191 3830  
Fax: (852) 2 389 5803

Data sheets are for initial product selection and comparison. Contact Esterline Power Systems prior to choosing a component.

# ELECTRICAL SPECIFICATION

TDH-7060/7061




Input (Control) Parameters	
Timing: a. Operation, Time Delay on b. Method c. Range d. Accuracy	Operate Adjustable Period 0.1 to 600 Seconds [6] ±10% [1]
Recycle Time	50 ms, Max [5]
Operations: (X1-X2) a. Input & Control Voltage b. Operating Current	20-30 Vdc 150 mA, Max @ 25° C
Transients: a. Positive, MIL-STD-704A, Figure9, Limit 1 b. Spike, MIL-STD-704A, 0-10 µs c. Self-Generated d. Susceptibility	+80 Volts Max ±600 Volts Max ±50 Volts Max +80; -600 Volts Max
Electromagnetic Interference Per MIL-STD-461A	Class 1D [3]
Power Loss	500 Microseconds [2]
<b>Output (Load) Parameters</b>	
Contact Form Contact Rating: a. Resistive b. Inductive c. Motor d. Lamp	4 PDT  10 Amperes 8 Amperes 4 Amperes 2 Amperes
Dielectric Strength: a. @ Sea Level, 60 Hz b. @ 80,000 ft., 60 Hz	1000 Vrms [4] 350 Vrms
Insulation Resistance @ 500 Vdc	1000 M Ω [4]

## GENERAL CHARACTERISTICS

Ambient Temperatures Range: a. Operating b. Non-Operating	-55 to +125° C -65 to +125° C
Vibration:	
a. Sinusoidal, 10-3000 Hz	30 G
b. Random: 50-2000 Hz, MIL-STD-810	0.4 G <sup>2</sup> /Hz
Shock @ 6 ± 1 MS, 1/2 Sine, 3 Axis	100 G
Acceleration, in any Axis	15 G
Life at Rated Resistive Load; Minimum	100,000 operations

## NUMBERING SYSTEM

Plug-in Terminal	Solder Hook Terminal												
TDH-7060 - 1001	TDH-7061 - 1001												
<table border="0"> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td>1</td> <td>2</td> <td>3</td> </tr> </table>				1	2	3	<table border="0"> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td>1</td> <td>2</td> <td>3</td> </tr> </table>				1	2	3
1	2	3											
1	2	3											
<ol style="list-style-type: none"> <li>1. Model Number.</li> <li>2. Pin Style Number.</li> <li>3. Timing Range, Fixed: 100 milliseconds to 600 seconds. (See Note 6).</li> </ol>													

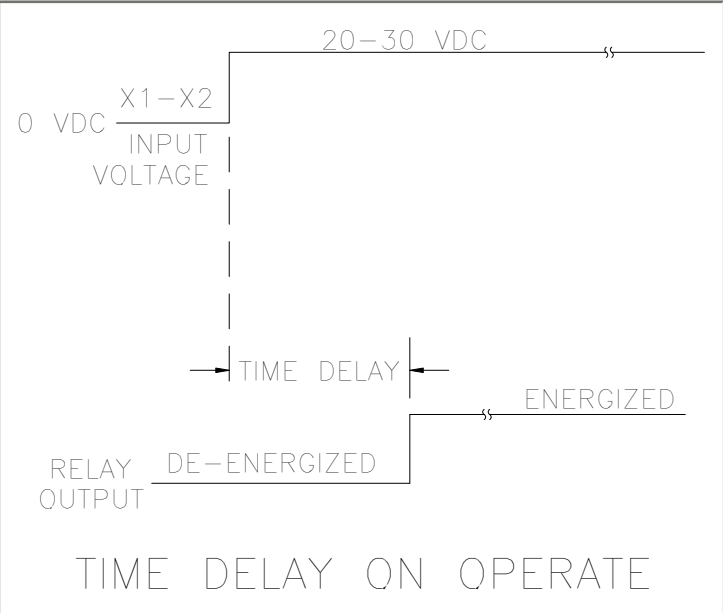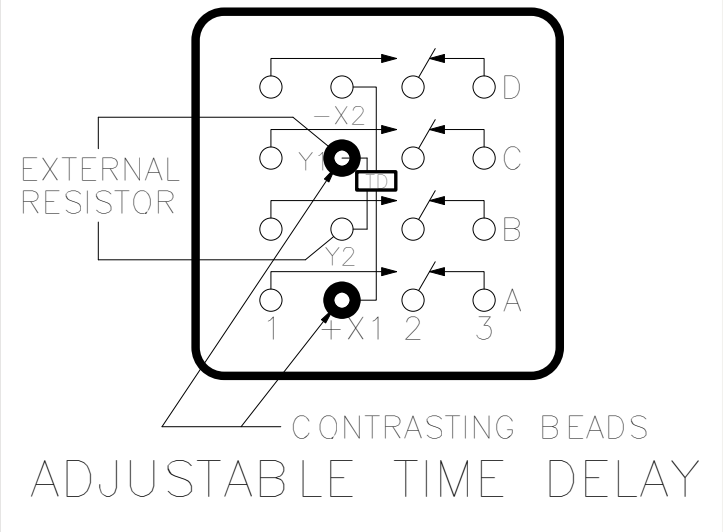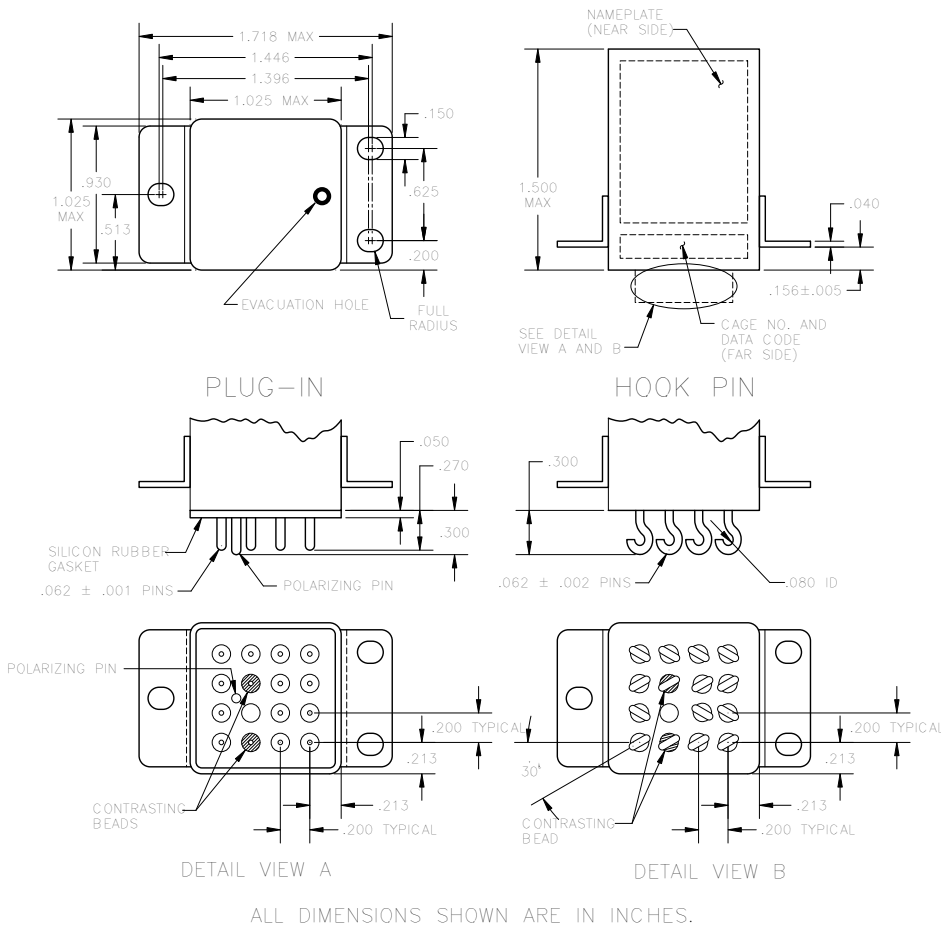

**NOTES**

- [1] The accuracy specification applies for any combination of operating temperature and voltage.
  - [2] The accuracy will not be affected by power interruptions up to 1 millisecond, spaced at least 10 milliseconds apart. Transient and power loss specifications are based on a maximum duty cycle of 1/50.
  - [3] EMI test limits will not be exceeded during the timing interval or when continuously energized under steady state conditions, per paragraph 3.23, MIL-PRF-83726B.
  - [4] Terminals X1, X2, R1, R2 and L must be connected together during the test. Dielectric withstanding voltage and insulation resistance are measured at sea level between all mutually insulated terminals and between all terminals and case.
  - [5] Recycle time is defined as the maximum time power must be removed from terminal X1 to assure that a new cycle can be completed within the specified timing tolerance.
  - [6] A four digit number defines the time delay in seconds (or milliseconds). The first three digits are significant figures, used to define the specific time delay. The fourth digit represents the number of zeros to follow the first three digits.
- | <u>SPECIFY</u> | <u>STANDARD DECADE RANGE</u>                 |
|----------------|--|
| - 1001         | = 0.1 to 1 second (100 to 1000 milliseconds) |
| - 1002         | = 1.0 to 10 seconds                          |
| - 5002         | = 5 to 50 seconds                            |
| - 5003         | = 50 to 500 seconds                          |
- An external resistor is used to obtain a specific time delay within the specified decade range. The formula below provides the proper resistance value to achieve the desired time delay:
- $$R_{ext} = \left( \frac{T_1}{T_0} - 1 \right) 100,000 \text{ Ohms}$$
- Where:  $R_{ext}$  = External resistance value (Ohms)  
 $T_1$  = Desired time in seconds  
 $T_0$  = Minimum time (low end of the decade range) in seconds.
- As an example, if using a 5 to 50 second adjustable timer and a 30 second delay is desired, the calculation is:
- $$R_{ext} = \left( \frac{30}{5} - 1 \right) 100,000 \text{ Ohms or } R_{ext} = 500 \text{ K Ohms}$$
- Recommended resistors IAW MIL-R-55182 1/8 Watt, 1% (RNC60HXXXXFS).  
 External resistor not supplied.

## DERATING OF CONTACTS FOR DC VOLTAGES ABOVE NOMINAL RATING

To establish a standard for the derating of relay contacts is, at best, a subjective practice. Limitations are governed by the type of relay, contact gap, maximum voltage capabilities of the relay contact system, and the contact material.

The most common method is to derate the contacts by use of the Power Formula, using the known current and voltage.

This method is valid only for **Resistive Loads**, and is an approximation only; keeping in mind the limitations mentioned above.

$$\text{Power} = IE \text{ (Current x Voltage)}$$

$$I_2 E_2 = 2/3 I_1 E_1$$

Example:

A designer is working with a 55 volt DC system and has a relay rated at 10 amps resistive at 28 volts DC. What is the maximum current that can be switched at 55 Vdc.

$$I_1 = 10 \text{ Amperes}$$

$$E_1 = 28 \text{ VDC}$$

$$E_2 = 55 \text{ VDC}$$

$$I_2 = ? \text{ (Current ratings at 55 VDC Resistive)}$$

$$I_2 E_2 = 2 I_1 E_1 / 3$$

$$I_2 = 2 I_1 E_1 / E_2 \cdot 3$$

$$= 2 (10 \times 28) / 55 \times 3$$

$$= 560 / 165$$

$$I_2 = 3.4 \text{ Amperes at 55VDC}$$

In addition, the user should always be concerned about the following:

1. Derating contacts that are rated for less than 10 Amperes at nominal voltage.
2. Derating contacts for use in system voltages above 130 Volts DC

# ENGINEERING DATA SHEET

# SO-1056-8691

RELAY SOCKET  
12 AMP




BASIC SOCKET SERIES DESIGNATION FOR:

**Series KL**  
**Series TDH-7050, TDH-7060, TDH-7070**



MEETS THE REQUIREMENTS OF:

**MIL-DTL-12883**

## SOCKET DRAWING

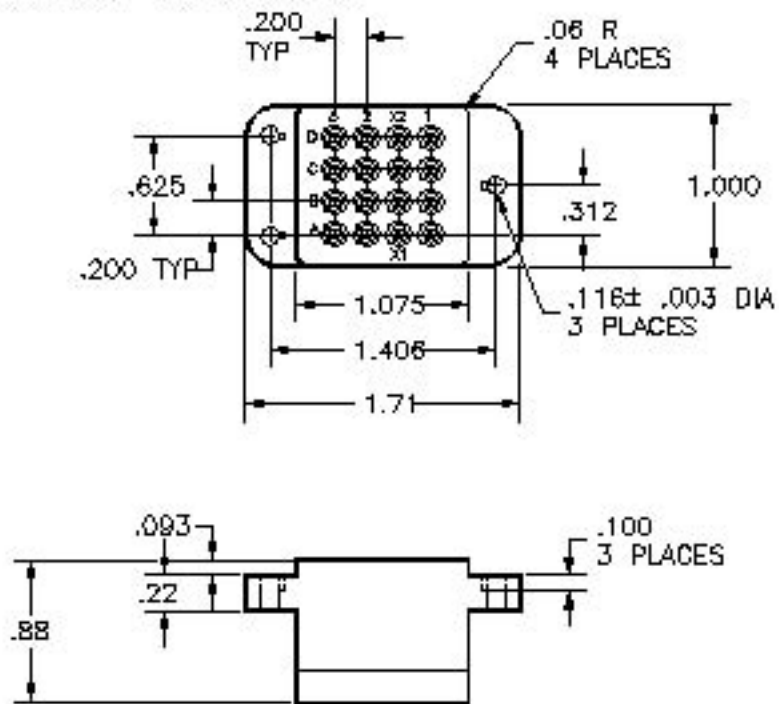

## HARDWARE MOUNTING

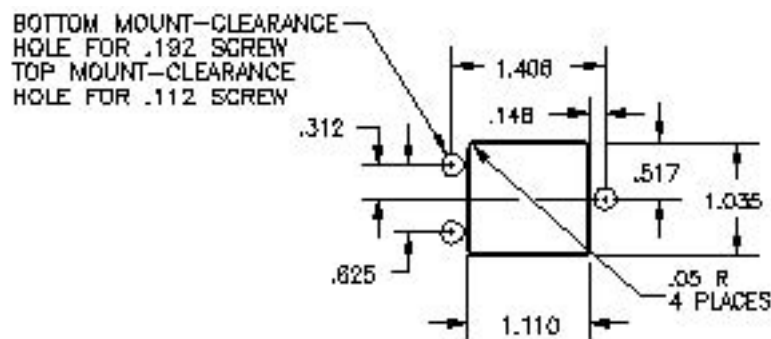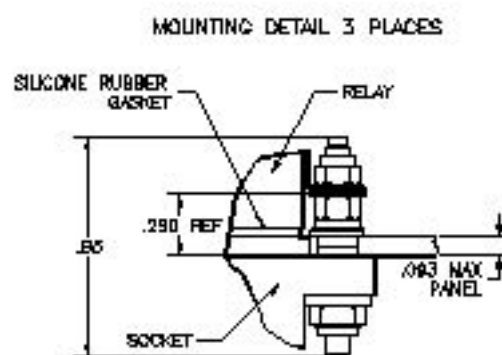

## MOUNTING DIMENSIONS

## GENERAL CHARACTERISTICS

1. Supplied with mounting hardware No. 16 contacts, No. 16 crimp.

2. Standard tolerances

.xx ±.01; xxx ±.005

3. Weight

.118 lb. max

4. Temperature range

-70° C to +125° C



Featuring **LEACH**® power and control solutions  
www.esterline.com

**AMERICAS**  
6900 Orangethorpe Ave.  
P.O. Box 5032  
Buena Park, CA 90622

Tel: (01) 714-736-7599  
Fax: (01) 714-670-1145

**EUROPE**  
2 Rue Goethe  
57430 Sarralbe  
France

Tel: (33) 3 87 97 31 01  
Fax: (33) 3 87 97 96 86

**ASIA**  
Units 602-603 6/F Lakeside 1  
No.8 Science Park West Avenue  
Phase Two, Hong Kong Science Park  
Pak Shek Kok, Tai Po, N.T.  
Hong Kong

Tel: (852) 2 191 3830  
Fax: (852) 2 389 5803

Data sheets are for initial product selection and comparison. Contact Esterline Power Systems prior to choosing a component.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [esterline](#) manufacturer:*

Other Similar products are found below :

[KC-A1N](#) [M83536/32-003L](#) [SO-1056-8691](#) [9123-8070](#) [K-D4A](#) [X-J7B](#) [S320-A1A10](#) [J-J7A-012](#) [SM-1000-003](#) [VS-455-1](#) [TDH-2016-1002](#)  
[M83536/5-024M](#) [S283A004-7](#) [9130G-10677](#) [9524-6507](#) [X-A2N](#) [X-A1N](#) [KL-D4L-029](#) [TDH-7101-2002](#) [JC-D1N](#) [Y-D4N-300L](#) [002-5089-000](#) [JA-D4E](#) [M83726/30-1001P](#) [002-3261-000](#) [M83726/24-1001](#) [M6106/19-017](#)