

Female connector; 4-pole; Pin spacing 5 mm / 0.197 in; 100% protected against mismatching; codable

Item No.: 721-104/026-000



Female connector; 4-pole; Pin spacing 5 mm / 0.197 in; 100% protected against mismatching; codable

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	721-104/026-000
GTIN / EAN	4044918353557
Content	1
Order amount	100
Customer item number	

Notes

Item description: Universal connection for all conductor types Easy cable pre-assembly and on-unit wiring via vertical and horizontal CAGE CLAMP® actuation Integrated test ports 100% protected against mismatching Coding option available


Technical data


Miscellaneous

No. of poles	4
Pin spacing	5 mm (0.197 in)
Total number of connection points	4
Total number of potentials	4
Color	light gray
Ratings according to 1	IEC/EN 60664-1
Rated voltage (III / 3) [V]	320 [V]

Technical data	
<i>Rated surge voltage (III / 3) [kV]</i>	4 [kV]
<i>Rated voltage (III / 2) [V]</i>	320 [V]
<i>Rated surge voltage (III / 2) [kV]</i>	4 [kV]
<i>Rated voltage (II / 2) [V]</i>	630 [V]
<i>Rated surge voltage (II / 2) [kV]</i>	4 [kV]
<i>Nominal current [A]</i>	16 [A]
<i>Number of individual connection objects at the product</i>	1
<i>Number of levels</i>	1
<i>Connection technology</i>	CAGE CLAMP®
<i>Number of connection points</i>	1
<i>Actuation type</i>	Betätigungswerkzeug
<i>Solid sizes</i>	0.08 ... 2.5 mm ² / 28 ... 12 AWG
<i>Fine-stranded wires</i>	0.08 ... 2.5 mm ² / 28 ... 12 AWG
<i>Fine-stranded wires with insulated ferrule</i>	0.25 ... 1.5 mm ² / ...
<i>Fine-stranded wires with uninsulated ferrule</i>	0.25 ... 2.5 mm ² / ...
<i>Strip length</i>	8 ... 9 mm / 0.31 ... 0.35 in
<i>Material group</i>	I
<i>Insulating material</i>	Polyamide 66 (PA 66)
<i>Flammability rating per UL 94</i>	V0
<i>Limit temperature range</i>	-60 ... 85 C
<i>Clamping spring material</i>	Chrome-nickel spring steel (CrNi)
<i>Contact material</i>	Copper alloy
<i>Contact plating</i>	tin-plated
<i>Fire load [MJ]</i>	0.106 [MJ]
<i>Weight [g]</i>	7.47 [g]
<i>Width</i>	21.5 mm / 0.846 in
<i>Height</i>	14.3 mm / 0.563 in
<i>Length</i>	26.45 mm / 1.041 in

Images & drawings

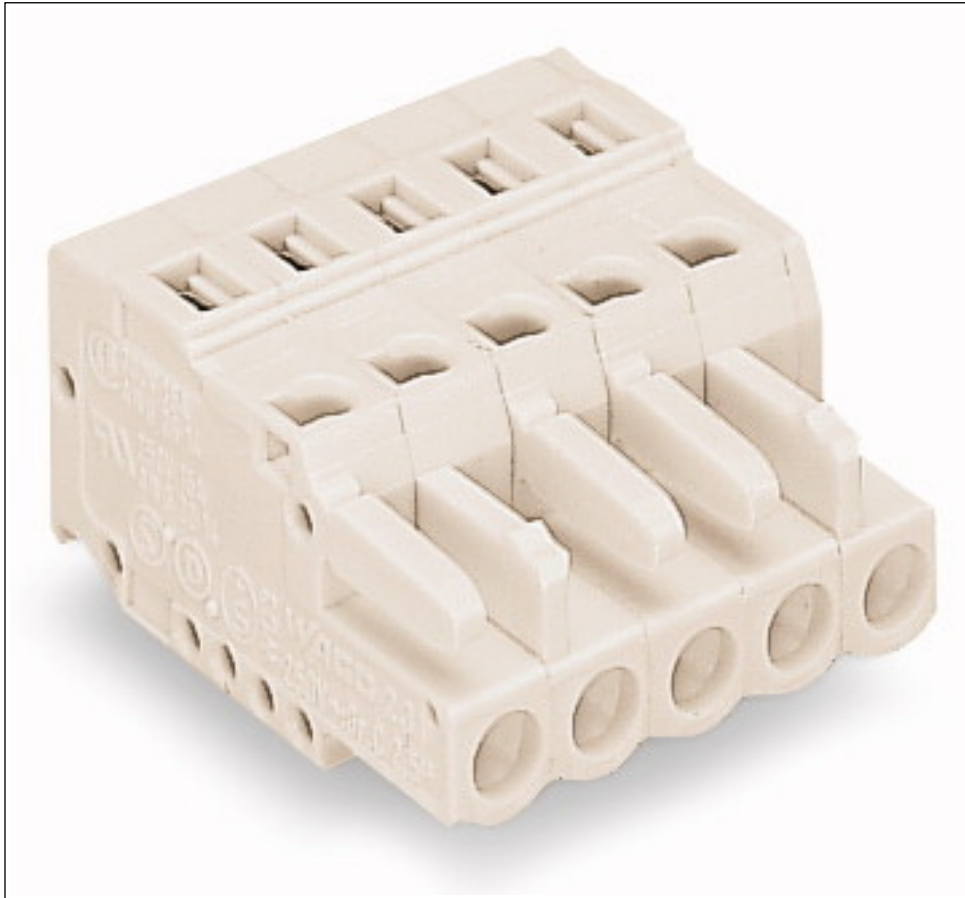

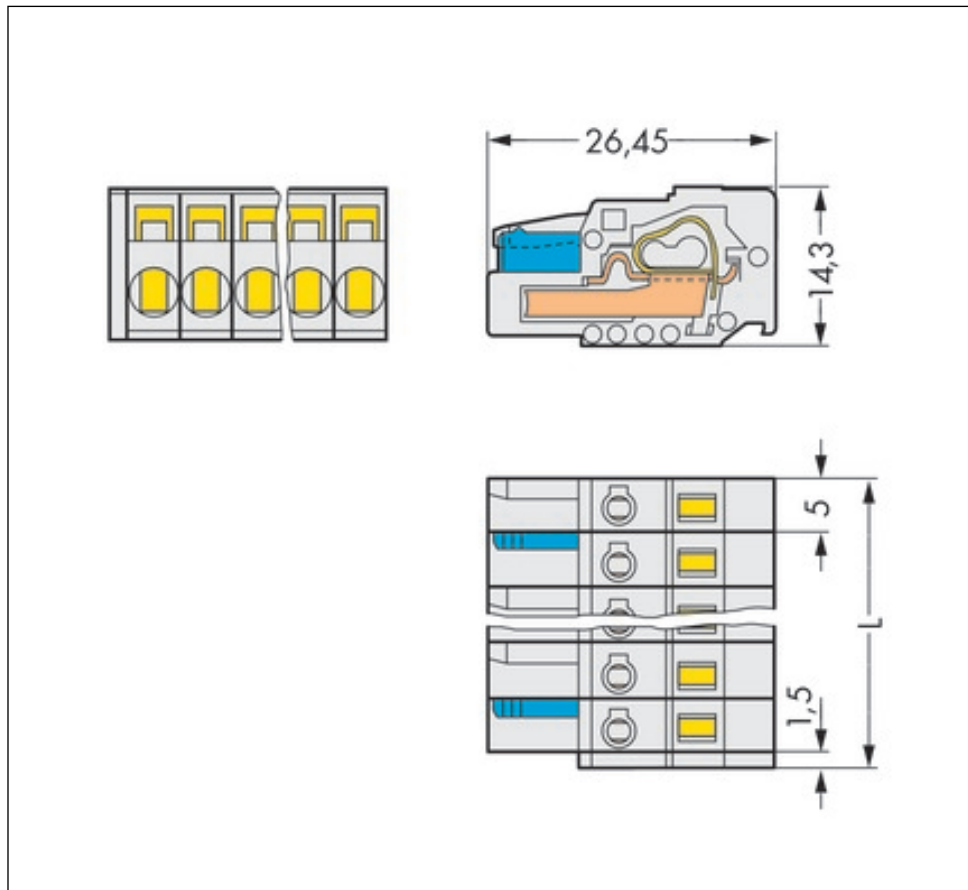

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [wago manufacturer](#):

Other Similar products are found below :

[750-460](#) [231-118/026-000](#) [231-303/026-000](#) [231-620/019-000](#) [257-403](#) [280-438](#) [280-831](#) [284-624](#) [210-111](#) [231-303/037-000](#) [231-446/001-000_NR](#) [232-216/026-000](#) [234-510](#) [264-726](#) [280-339](#) [0283-0671](#) [830-800/000-305](#) [750-512](#) [750-455](#) [51251782](#) [286-312](#) [713-1428/107-000](#) [731-138/048-000](#) [750-459](#) [750-517](#) [750-602](#) [793-3505](#) [826-172](#) [859-304](#) [280-335](#) [231-535/001-000](#) [2604-1105](#) [2604-1106](#) [2604-1504](#) [2606-1103/020-000](#) [2624-1103](#) [2626-3103/020-000](#) [821-104](#) [713-1107](#) [852-1411](#) [2106-1307](#) [2116-5307](#) [832-1205](#) [832-3604](#) [2009-110](#) [281-512/281-501](#) [286-336](#) [750-421](#) [750-838](#) [753-559](#)