

**Features**

- Reduced RFI and EMI
- Reduced Snubbing
- Extensive Characterization of Recovery Parameters
- Hermetic
- Surface Mount
- ESD Rating: Class NS per MIL-STD-750, Method 1020

$V_R = 200V$
$I_{F(AV)} = 25A$
$t_{rr} = 35ns$


**Description**

These Ultrafast, soft recovery diodes are optimized to reduce losses and EMI/RFI in high frequency power conditioning systems. An extensive characterization of the recovery behavior for different values of current, temperature and di/dt simplifies the calculations of losses in the operating conditions. The softness of the recovery eliminates the need for a snubber in most applications. These devices are ideally suited for power converters, motors drives and other applications where switching losses are significant portion of the total losses.

**Absolute Maximum Ratings**

	Parameter	Max.	Units
$V_R$	Cathode to Anode Voltage	200	V
$I_{F(AV)}$	Continuous Forward Current, ① $T_C = 106^\circ C$	25	A
$I_{FSM}$	Single Pulse Forward Current, ② $T_C = 25^\circ C$	150	
$P_D @ T_C = 25^\circ C$	Maximum Power Dissipation	70	W
$T_J, T_{STG}$	Operating Junction and Storage Temperature Range	-55 to +150	$^\circ C$

**Note:** ① D.C. = 50% rect. wave  
 ② 1/2 sine wave, 60 Hz, P.W. = 8.33 ms

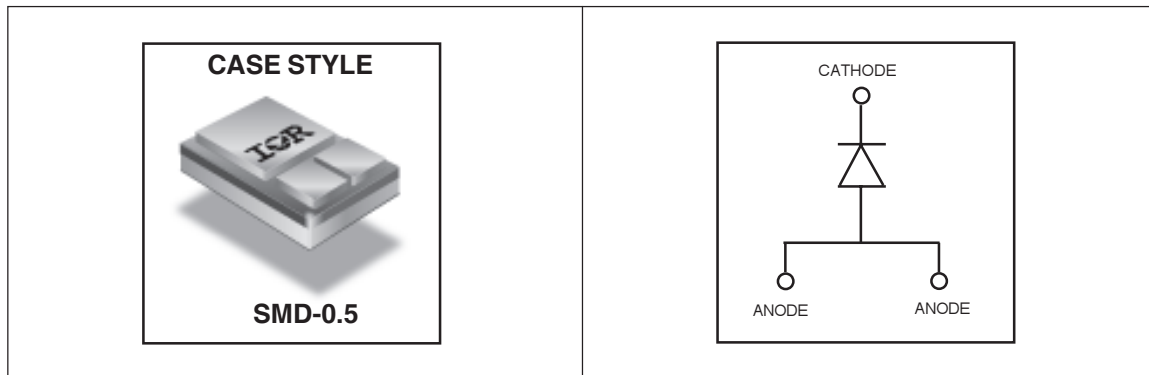

**Electrical Characteristics @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**


	Parameter	Min.	Typ.	Max.	Units	Test Conditions
$V_{BR}$	Cathode Anode Breakdown Voltage	200	—	—	V	$I_R = 100\mu\text{A}$
$V_F$	Forward Voltage See Fig. 1	—	—	1.18	V	$I_F = 25\text{A}, T_J = -55^\circ\text{C}$
		—	—	0.94		$I_F = 10\text{A}, T_J = 25^\circ\text{C}$
		—	—	1.07		$I_F = 25\text{A}, T_J = 25^\circ\text{C}$
		—	—	1.19		$I_F = 50\text{A}, T_J = 25^\circ\text{C}$
		—	—	0.88		$I_F = 25\text{A}, T_J = 125^\circ\text{C}$
$I_R$	Reverse Leakage Current See Fig. 2	—	—	10	$\mu\text{A}$	$V_R = V_R \text{ Rated}$
		—	—	250	$\mu\text{A}$	$V_R = V_R \text{ Rated}, T_J = 125^\circ\text{C}$
$C_T$	Junction Capacitance, See Fig. 3	—	—	78	pF	$V_R = 200\text{V}$
$L_S$	Series Inductance	—	4.8	—	nH	Measured from center of cathod pad to center of anode pad

**Dynamic Recovery Characteristics @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**


	Parameter	Min.	Typ.	Max.	Units	Test Conditions
$t_{rr}$	Reverse Recovery Time	—	—	35	ns	$I_F = 1.0\text{A}, V_R = 30\text{V}, di/dt = 200\text{A}/\mu\text{s}$
$t_{rr1}$	Reverse Recovery Time	—	28	—	ns	$T_J = 25^\circ\text{C}$ See Fig.
$t_{rr2}$		—	43	—		$T_J = 125^\circ\text{C}$ 5
$I_{RRM1}$	Peak Recovery Current	—	3.9	—	A	$T_J = 25^\circ\text{C}$ See Fig.
$I_{RRM2}$		—	6.1	—		$T_J = 125^\circ\text{C}$ 6
$Q_{rr1}$	Reverse Recovery Charge	—	61	—	nC	$T_J = 25^\circ\text{C}$ See Fig.
$Q_{rr2}$		—	146	—		$T_J = 125^\circ\text{C}$ 7
$di_{(rec)M}/dt1$	Peak Rate of Fall of Recovery Current During $t_b$	—	820	—	A/ $\mu\text{s}$	$T_J = 25^\circ\text{C}$ See Fig.
$di_{(rec)M}/dt2$		—	1560	—		$T_J = 125^\circ\text{C}$ 8

**Thermal - Mechanical Characteristics**


	Parameter	Typ.	Max.	Units
$R_{thJC}$	Junction-to-Case	—	1.76	$^\circ\text{C}/\text{W}$
Wt	Weight	1.0	—	g

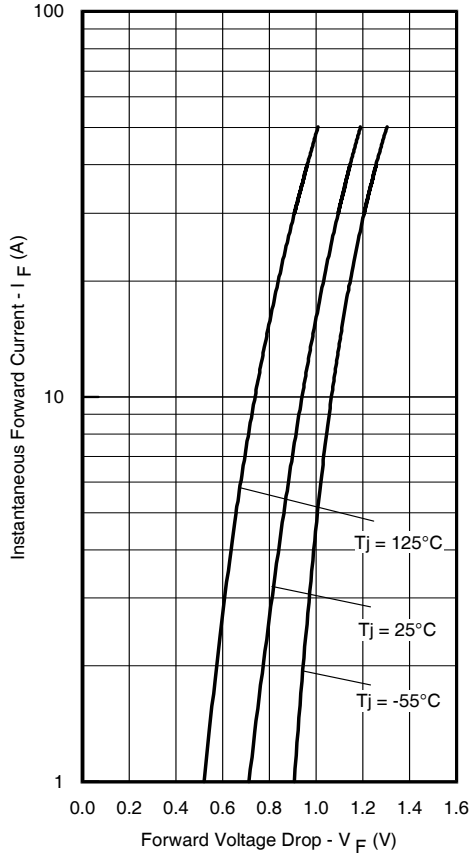


**Fig. 1** - Maximum Forward Voltage Drop Vs. Instantaneous Forward Current

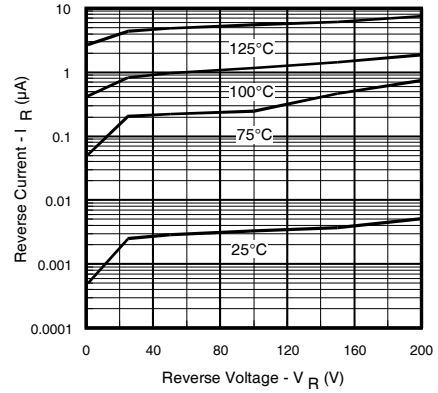

**Fig. 2** - Typical Reverse Current Vs. Reverse Voltage

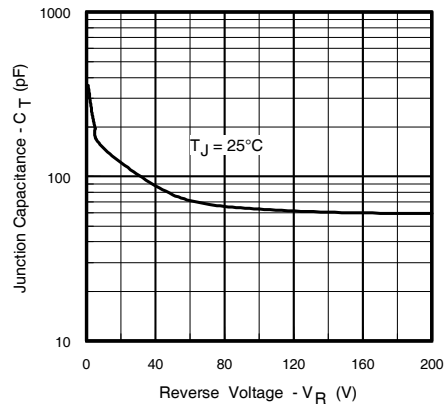

**Fig. 3** - Typical Junction Capacitance Vs. Reverse Voltage

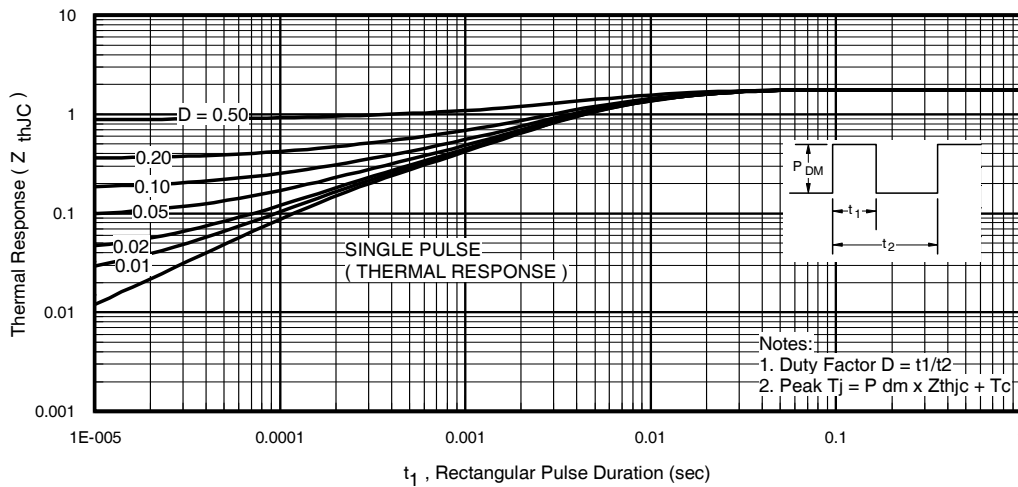

**Fig. 4** - Maximum Thermal Impedance  $Z_{th(jc)}$  Characteristics

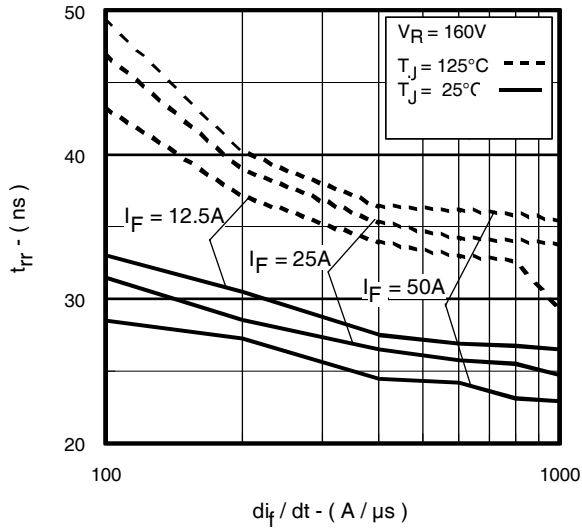


Fig. 5 - Typical Reverse Recovery Vs.  $di_F/dt$ ,

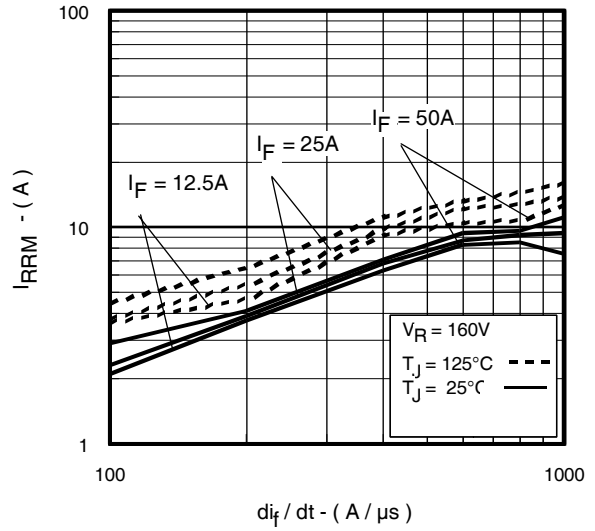


Fig. 6 - Typical Recovery Current Vs.  $di_F/dt$ ,

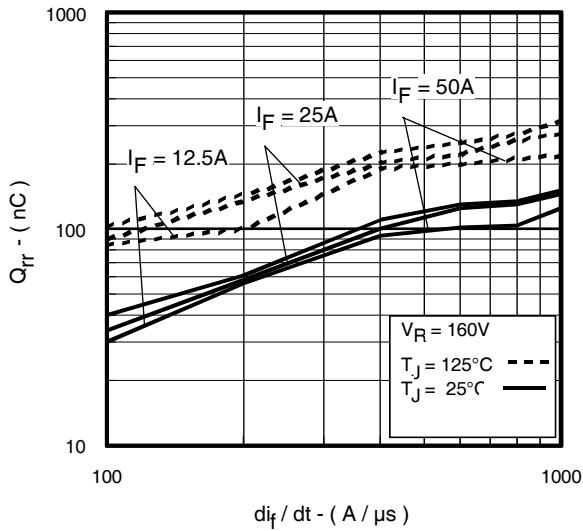


Fig. 7 - Typical Stored Charge Vs.  $di_F/dt$

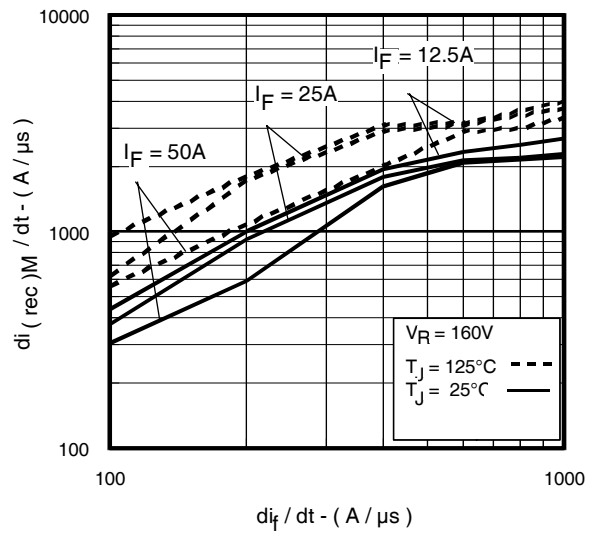


Fig. 8 - Typical  $di_{(rec)M}/dt$  Vs.  $di_F/dt$



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [infineon](#) manufacturer:*

Other Similar products are found below :

[TLE6209R](#) [BTS442E2E3062ABUMA1](#) [EVALM113023645ATOBO1](#) [EVALM11302TOBO1](#) [FD1000R33HE3-K](#) [FD300R06KE3](#)  
[FF1200R17KE3\\_B2](#) [FF300R06KE3HOSA1](#) [FF600R12ME4P](#) [FF600R17ME4\\_B11](#) [FP25R12KT4\\_B11](#) [FS150R12KE3G](#)  
[FS600R07A2E3\\_B31](#) [FZ1600R17HP4\\_B2](#) [FZ1800R17KF4](#) [FZ2400R17HE4\\_B9](#) [FZ600R65KE3](#) [DD261N22K](#) [DF1000R17IE4](#) [BAT 165](#)  
[E6327](#) [BCR 141W H6327](#) [BCR 533 E6327](#) [BDP950H6327XTSA1](#) [BSC093N04LSGATMA1](#) [BSM50GB60DLC](#) [BSO080P03NS3EGXUMA](#)  
[BSP372NH6327XTSA1](#) [BSR802NL6327HTSA1](#) [BSS214NH6327XTSA1](#) [BSS670S2LH6327XTSA1](#) [BSS806NEH6327XTSA1](#) [BTF3050TE](#)  
[BTM7811KAUMA1](#) [IPD50N04S4-08](#) [IPW60R190E6FKSA1](#) [IRPLHID2A](#) [KIT\\_TC1791\\_SK](#) [KIT\\_XMC45\\_AE4\\_002](#)  
[KIT\\_XMC4x\\_COM\\_ETH-001](#) [EVALM10565DTOBO1](#) [EVALM113020584DTOBO1](#) [FF300R17KE3\\_S4](#) [FF450R12ME4\\_B11](#)  
[FF600R17ME4](#) [T1401N42TOH](#) [T1500N16TOF VT](#) [T1851N60TOH](#) [T901N36TOF](#) [FS300R12KE4](#) [FS450R17KE4](#)