

Switch Probe for Presence Testing

F885




Centers 3,50 mm/138 mil

	Switch Travel	Temperature
Standard	1,7 mm	-20°...+80° C

The F885 is screwed into the receptacle in order to prevent ejection and to allow variable projection heights. Order number for insertion tool: FWZ885 and for larger tip diameters FWZ885L. Tip styles with larger diameters are available in the type F886.

You can find suitable receptacles on page 57.

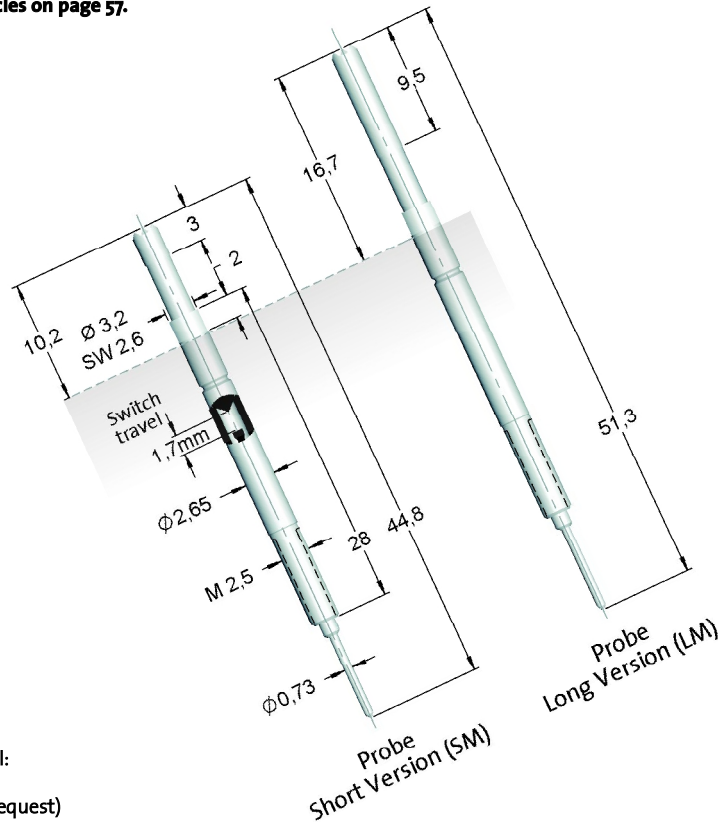

Mechanical Specifications

- Switch Travel: 1,7 ±0,2 mm
- Working Travel: 4,0 mm
- Full Travel: 5,0 mm
- Preload: 80 cN
- Spring Force at Working Travel: 350 cN ±20%
- 200 cN, 900 cN ±20% (On Request)
- Mechanical Life: 1,5 mill. cycles
- 100 tsd. cycles (900 cN)
- Pointing Accuracy: ±0,08 mm

Electrical Specifications

- Constant Current: 1,0 A
- Typical Probe Resistance: 50 mOhm

Materials and Finishes

- Plunger: see Tip Style
- Barrel: Brass, Gold plated
- Spring: Music Wire, Silver plated
- Receptacle: Brass, Gold plated

Order Example

F885 **03B** **080** **G** **350** **SM**

Type Tip Diameter Spring Force
 Tip Style Material Plunger Finish Length (optional)

Material: B = BeCu, K = Synthetic Material
Tip Diameter: 0,8 mm = 080
Plunger Finish: G = Gold plated, U = Unplated
Length: SM = Short Version, LM = Long Version
Receptacle: Order Number see drawing page 57

Projection Height

	H885/H885RD/H885KB3	H885IS	H885/5
Short Version	10,2 - 15,7 mm	10,4 - 15,9 mm	15,0 - 20,5 mm
Long Version	16,9 - 22,2 mm	16,9 - 22,4 mm	21,5 - 27,0 mm

Plunger Tip Style, Material, Finish and Tip Diameter

03 BeCu; G Short Version Length 5,0 mm	05 BeCu; G Short Version Length 3,0 mm	05 BeCu; G Long Version Length 9,5 mm	06 BeCu; G Short Version Length 3,0 mm	06 BeCu; G Long Version Length 9,5 mm
Ø 0,8 mm	Ø 2,3 mm	Ø 3,0 mm	Ø 1,0; 1,3; 2,3 mm	Ø 1,0; 1,8; 2,3 mm
16 BeCu; G Short Version Length 3,0 mm	17 BeCu; G Short Version Length 3,0 mm	17 Synthetic; U Short Version Length 3,0 mm		
Ø 1,0; 1,4; 1,8 mm	Ø 2,3 mm	Ø 2,3 mm		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Feinmetall](#) manufacturer:

Other Similar products are found below :

[579-0400](#) [66000-7](#) [R644543000](#) [R921923000](#) [R921930000](#) [R941344000](#) [R948161000](#) [R999351000](#) [1408-4](#) [1533-1](#) [174-R825B-EX](#)
[NYS508-BU](#) [1680](#) [174-R819B-EX](#) [R644543003](#) [R644543020](#) [R644543021](#) [R921926000](#) [R921931000](#) [R921932000](#) [R921934000](#)
[R929991000](#) [R941460000](#) [R941461000](#) [R941463600](#) [R941920600](#) [R948160000](#) [31B-2-RED](#) [032-0016-023](#) [105-1106-001](#) [108-1000-106](#)
[108-2301-621](#) [111-0707-001](#) [66001-9](#) [7013](#) [1395080-1](#) [930166100](#) [NYS508-GR](#) [NYS508-W](#) [NYS508-Y](#) [NYS511-R](#) [BP30-2BR10-B PKG](#)
[BP30-10-WT](#) [BP30-2BR-B PKG](#) [BP30Y-1 PKG](#) [R941049000](#) [R941340000](#) [R948141029](#) [R644543022](#) [R948142000](#)