
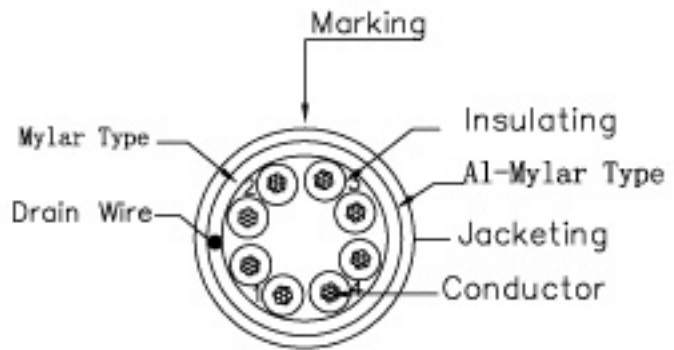


DATE	REV	DESCRIPTION	BY	CHKD

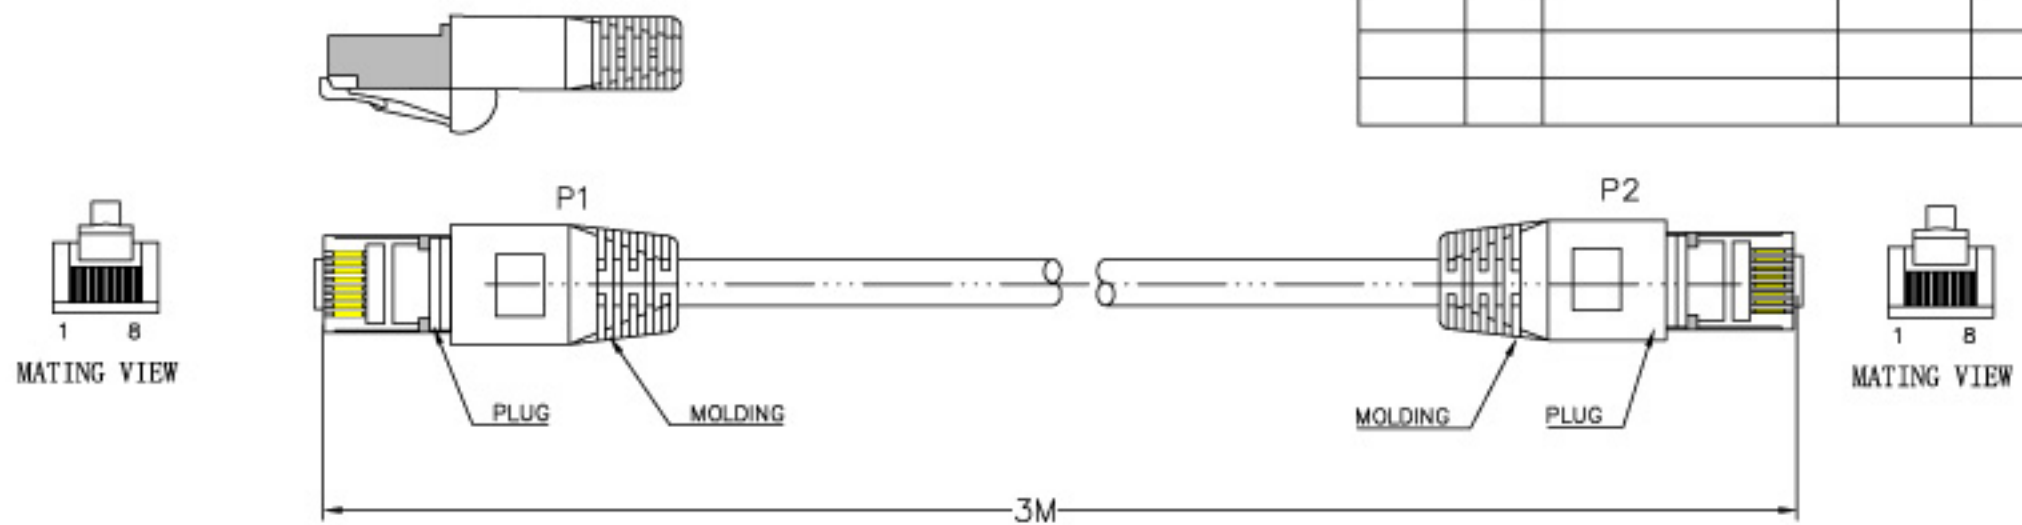


orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

lead	<1000ppm
Cadmium	<100ppm
Mercury	<1000ppm
Chromium	<1000ppm
PBB	<1000ppm
PBDE	<1000ppm

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2
1	1	WHT/ORG	3
	2	ORG	6
2	3	WHT/GRN	1
	6	GRN	2
3	4	BLU	7
	5	WHT/BLU	8
4	7	WHT/BRN	4
	8	BRN	5

Material:ROHS compliant from OCT.2004

Conductor	Rare Copper 26AWG 70.16±0.15mm
Insulation	ThicknessMIN at any point0.15mm MAX AVG0.25mm Diameter0.92±0.05mm
Jacketing	PVC ThicknessMIN at any point0.50mm MAX AVG0.60mm Diameter2.6±0.2mm

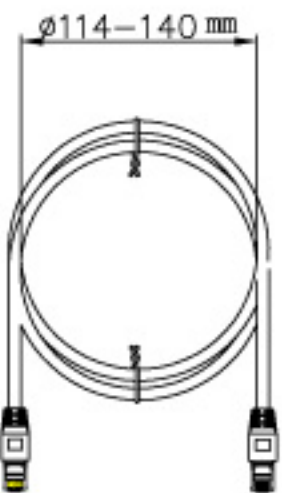

WIRE	CAT. 5E FTP STR
Plug	YS-02
Length	3M
COLOR	GY825

Unless specified on the drawing, tolerances are per the follows:  
 . ± 1  
 .X ± 0.2  
 .XX ± 0.05



DRAW.NO	YS-02	ITEM	1962-3X		
DEPARTMENT		DRAW	Peace Jing	DATE	2006/02/27
SCALE		CHECKER	APPROVAL		
UNIT	MM	SHEET	1	OF	1

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [videk manufacturer](#):*

Other Similar products are found below :

[2129HQ-1](#) [1996-10B](#) [1054](#) [2993-10BK](#) [2996AS-1GY](#) [2961-15G](#) [2965-0.5RG](#) [2965-0.75Y](#) [2965-10Y](#) [2965-30IM](#) [4093-2](#) [8920-4.3](#) [1963-3](#)  
[1962-10R](#) [2259](#) [2961-30BK](#) [2965-30G](#) [2965-3BK](#) [2965-1.5B](#) [2996AS-0.5Y](#) [2129GHQ-5](#) [8103](#) [2419-2](#) [2965-0.3PK](#) [2965-1.5RG](#) [2965-2PR](#)  
[2965-30](#) [2965-30BK](#) [2996-5Y](#) [3073-10](#) [2409M-2](#) [2993-3RG](#) [2996AS-10B](#) [2996AS-5G](#) [2996AS-5R](#) [1962-3](#) [2996AS-3](#) [2965-15BK](#) [8104](#)  
[2561-1](#) [9301-5](#) [2965-0.75BK](#) [2965-30B](#) [2965-3RG](#) [2996AS-10BK](#) [2218D-2](#) [1962-5](#) [2129GHQ-3](#) [2965-15B](#) [2965-15Y](#)