

# HIGH FREQUENCY BALUN ADAPTER

For 150Ω Fibre Channel , 100Ω Gigabit Ethernet, and 78Ω High Speed 1553.



- ⚙️ Transforms a balanced differential signal to a 50 Ω , grounded unbalanced signal for testing differential cable
- ⚙️ Designed for standard test equipment with SMA connectors
- ⚙️ Wide bandwidth 1.0 MHz – 1.2 GHz
- ⚙️ Moisture Sensitivity Level: 1




## Electrical Specifications @ 25 °C – Operating Temperature – 0 °C to +70 °C

Part Number*	Impedance (Ω)	Rated (A)	Insertion Loss (dB MAX) 1.0 MHz - 1.2 GHz	Return Loss (dB MIN) 1.0 MHz - 1.2 GHz
	Unbalanced	Balanced		
HFB050150	50	150	-2	15
HFB050100	50	100	-2	15
HFB050078	50	78	-2	15

### Mechanical

### Electrical Schematic

HFB050XXX

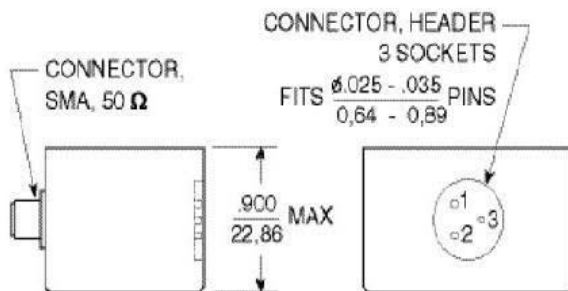

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
 Unless otherwise specified, all tolerances are:  $\pm \frac{.010}{0,25}$



# HIGH FREQUENCY BALUN ADAPTER

For 150Ω Fibre Channel , 100Ω Gigabit Ethernet, and 78Ω High Speed 1553.




## Application Notes

The Specialty Components Division has developed a high frequency BALUN for test and measurement applications. Wide bandwidth and high frequency response makes this device ideal for differential mode measurement in high speed applications such as Fibre Channel, Gigabit Ethernet and next generation MIL-STD-1553. The BALUN allows design engineers to characterize differential mode devices using single-ended test equipment as shown below.



### Typical Return Loss - S11

50 ohm Unbalanced Port

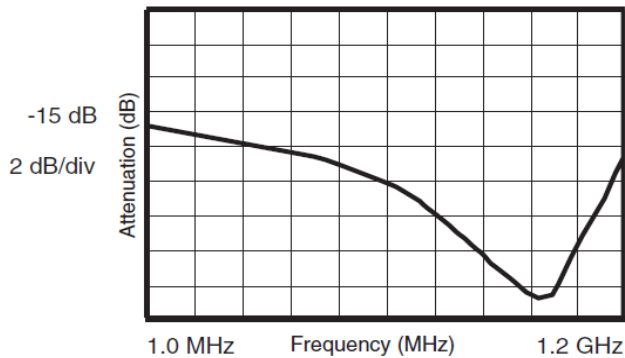

### Typical Insertion Loss - S21


Two Baluns Configured Back to Back

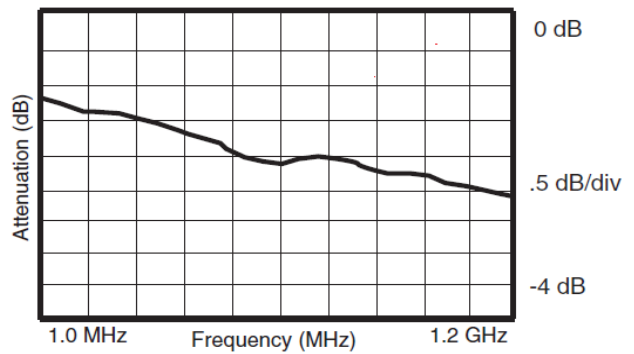

Insertion loss S21 is measured with two units connected back to back as shown.

Note 1: Correct value of S21 for each DUT will be 1/2 of the value shown in graph.

Note 2: Return loss S11 is measured on 50 ohm port with 150 ohms termination on balance port.

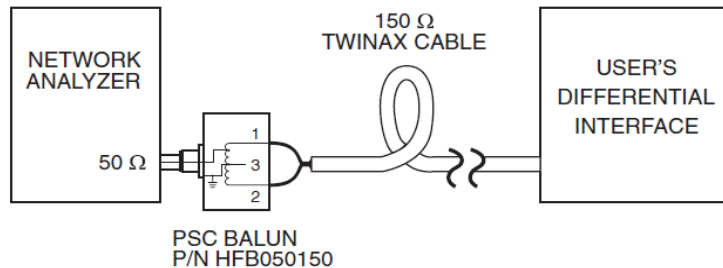


# HIGH FREQUENCY BALUN ADAPTER

For 150Ω Fibre Channel, 100Ω Gigabit Ethernet, and 78Ω High Speed 1553.



## Tin/Lead Recommended Reflow Profile (Based on J-STD-020D)

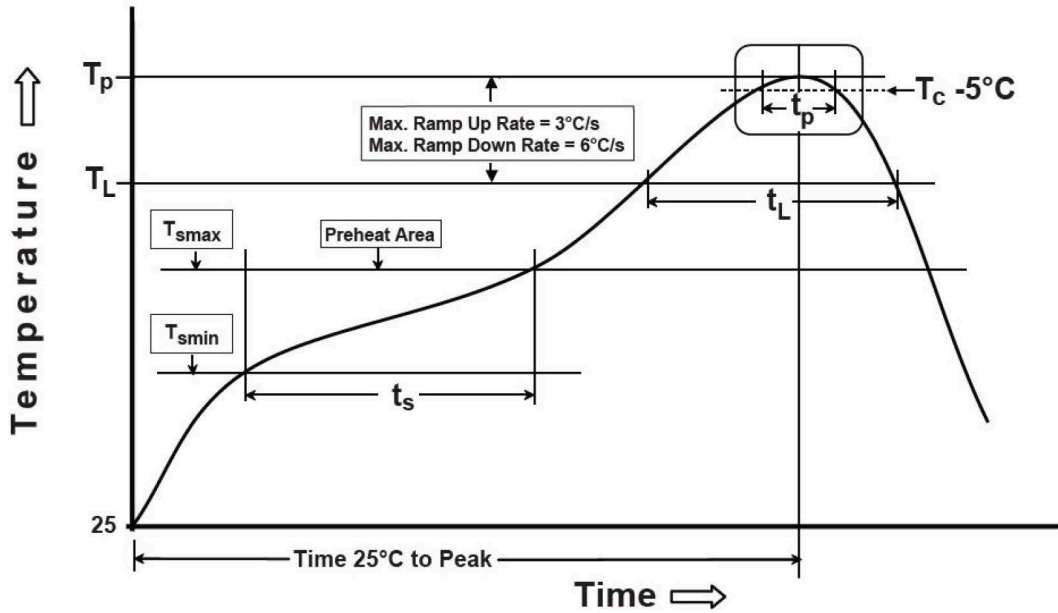

$T_{SMIN}$ (°C)	$T_{SMAX}$ (°C)	$T_L$ (°C)	$T_P$ (°C MAX)	$t_s$ (s)	$t_L$ (s)	$t_p$ (s MAX)	Ramp-up rate ( $T_L$ to $T_P$ )	Ramp-down rate ( $T_P$ to $T_L$ )	Time 25°C to peak temperature (s MAX)
100	150	183	235	60-120	60-150	20	3°C/s MAX	6°C/s MAX	360

Notes:

1. All temperatures measured on the package leads.
2. Maximum times of reflow cycle: 2.

### For More Information

iNRCORE, LLC  
 311 Sinclair Road Bristol,  
 PA 19007-6812 U.S.A  
 Tel: + 1.215.781.6400  
 Fax: +1.215.7816430

**Global Sales Representatives and Locations:**  
<http://www.inrcore.com>

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:*

*Click to view products by [iNRCORE](#) manufacturer:*

Other Similar products are found below :

[CU4S0506AT-2655-H1](#) [MGPWT-00449-P](#) [PE-64961](#) [1812WBT2-4](#) [BX1194WNL](#) [1879479-1](#) [PA1528ANL](#) [T1137NLT](#) [PE-65848FNLT](#)  
[H5019EFNL](#) [CX2045ALNLT](#) [TG1G-E201NV6LF](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#)  
[TTC-143-H](#) [TTC-5032-1](#) [4-1879391-0](#) [100213](#) [T1142NL](#) [TG1G-S001NZLF](#) [T1124NL](#) [1879732-1](#) [2-1879391-5](#) [MABA-010321-CT1A42](#)  
[TX1341NL](#) [H0013FNL](#) [H5020FNL](#) [H2009FNLT](#) [H5004NLT](#) [S553-5999-52-F](#) [SCMS7D43AY100PT1](#) [T5008NLT](#) [PE-68517T](#) [MGPWT-](#)  
[00339-P](#) [H5014FNLT](#) [TX1473NLT](#) [PE-69011NLT](#) [CX2043LNLT](#) [H7137FNLT](#) [H1259NLT](#) [TX1344NLT](#) [LM-LP-1005L](#) [H0013NLT](#)  
[S558-5500-JV](#) [TX1193NLT](#) [T7015NL](#) [T1124NLT](#)