




SMT POWER INDUCTORS

Toroid - Military/Aerospace SLED Series



-  Ruggedized header with SLED rails for secure board mounting
-  **Current Rating:** up to 3.8ADC
-  **Inductance Range:** 9.4μH to 439μH


Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C

Part # Number	Inductance @ I _{rated} (μH)	I _{rated} (A)	DCR (mΩ)		ET (V-μsec)	Inductance @ 0ADC (μH ±10%)	100 Gauss ET ₁₀₀ (V-μsec)	1 Amp DC H ₁ (Orsted)
			TYP	MAX				
SLED 25								
PL8500	9.4	3.80	27	32	15.2	10.4	2.65	11.95
PL8501	13.3	3.20	40	46	18.8	14.6	3.13	14.12
PL8502	23	2.40	65	74	24.3	25	4.10	18.46
PL8503	50	1.60	121	135	37.0	56	6.15	27.69
PL8504	75	1.30	181	220	44.3	83	7.47	33.67
PL8505	90	1.20	246	285	49.2	100	8.19	36.93
PL8506	137	1.00	387	425	59.4	152	10.12	45.61
PL8507	200	0.82	585	673	71.3	220	12.17	54.85
PL8508	305	0.66	845	972	85.8	331	14.94	67.34
PL8509	439	0.56	1322	1520	99.6	472	17.83	80.37



- NOTES:**
- The reference inductance at rated DC current is a typical value.
 - Temperature rise is 50°C in typical buck or boost circuits at 250kHz and with the reference ET applied to the inductor.
 - Total loss in the inductor is 380mW for 50°C temperature rise above ambient.
 - To estimate temperature rise in a given application, determine copper and core losses, divide by 380 and multiply by 50.
 - For the copper loss, calculate $I_{DC}^2 \times R_N$.
 - For core loss, using frequency (f) and operating flux density (B), calculate $6.11 \times 10^{-18} \times B^{2.7} \times f^{2.04}$.
 - For flux density (B), calculate ET (V-μsec) for the application, divide by ET₁₀₀ from the table, and multiply by 100.
 - Limit the DC bias (H) to 46 orstedts. Calculate H by multiplying H₁ from the table by I_{DC} of the application.
 - Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PL8500 becomes PL8500T). Pulse complies to industry standard tape and reel specification EIA481.

Mechanical

Schematic

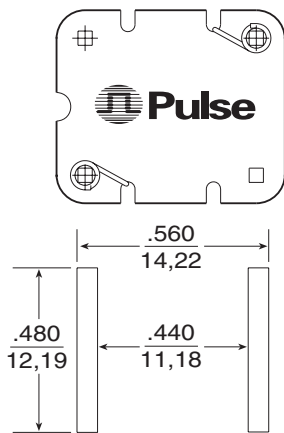

SUGGESTED PAD LAYOUT

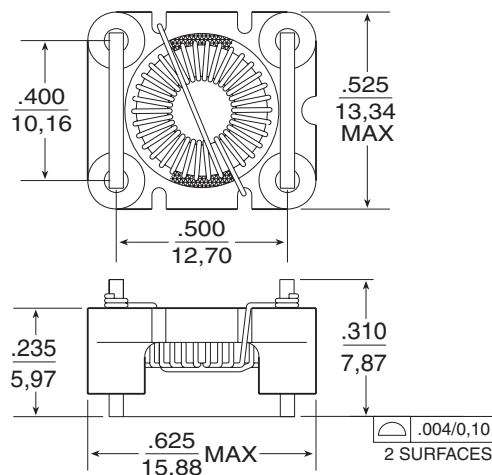

Pan & Tube35/tube
 Tape & Reel300/reel
 MSL3
 Dimensions: Inches
 mm
 Unless otherwise specified,
 all tolerances are ± $\frac{.010}{0.25}$

For More Information:

Pulse Worldwide Headquarters
 2 Pearl Buck Court
 Bristol, PA 19007
 U.S.A.
www.pulseeng.com
 TEL: 215 781 6400
 FAX: 215 781 6403

Pulse Northern Europe
 3 Huxley Road
 Surrey Research Park
 Guildford, Surrey GU2 5RE
 United Kingdom
 TEL: 44 1483 401700
 FAX: 44 1483 401701

Pulse Southern Europe
 Zone Industrielle
 F-39270
 Orgelet
 France
 TEL: 33 3 84 35 04 04
 FAX: 33 3 84 25 46 41

Pulse China Headquarters
 No. 1
 Industrial District
 Changan, Dongguan
 China
 TEL: 86 769 5538070
 FAX: 86 769 5538870

Pulse North China
 Room 1002
 No. 819
 Nanjing West Rd
 Shanghai
 China
 TEL: 86 21 32181071
 FAX: 86 21 32181396

Pulse South Asia
 150 Kampong Ampat
 #07-01/02
 KA Centre
 Singapore 368324
 TEL: 65 6287 8998
 FAX: 65 6280 0080

Pulse North Asia
 3F-4, No. 81, Sec. 1
 Hsin Tai Wu Road
 Hsi-Chih
 Taipei Hsien
 Taiwan
 TEL: 886 2 26980228
 FAX: 886 2 26980948

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.
 © Copyright, 2005. Pulse Engineering, Inc. All rights reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [iNRCORE](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)