


# PTFE Series 4:1

pro-POWER

## High Temperature Heat Shrink Tubing

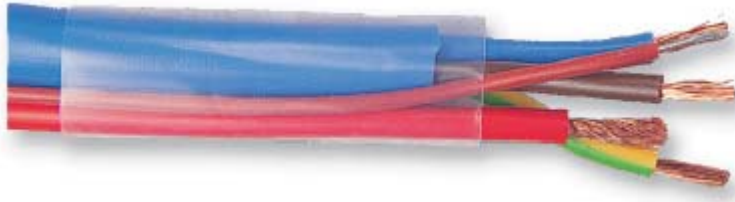

### Features:

- Natural translucent PTFE 4:1 heat shrink tubing to MIL-1-23053/12 class 3, AMS3584 when heated to 327°C
- Non-flammable to ASTM D876
- Ideal for covering rollers, heaters, probes, high temperature terminals etc
- Good electrical, high temperature and chemical resistance and corrosion properties

### Specifications:

Property	Test Method	Value
<b>Physical</b>		
Tensile	ASTM D638	2,500 - 4,000
Elongation		225 - 450
Specific Gravity	ASTM D792	2.11 - 2.19
Low Temperature Flex	MIL-1-23053	No cracking
Coefficient of Friction	-	0.1
Flexural Modules	ASTM D798	50 - 90
Impact Strength	ASTM D258	3
Heat Deflection Temperature	ASTM D648	252
<b>Electrical</b>		
Dielectric Strength	ASTM D876	1,400 (35 kV / mm) min.
Volume Resistivity		10 <sup>18</sup>
Dielectric Constant	ASTM D150	2.05 ±0.05
<b>Chemical</b>		
Water Absorption	ASTM D570	0.01
Corrosion (copper contact)	MIL-1-23053	Non-corrosive
Flammability	ASTM D876	Non-burning
Fluid Resistance	MIL-1-23053	No change in properties
Operating Temperature	-	-67 to +250

### Specification Table

Ordering Size	Minimum Expansion	Maximum Recovered	Nominal Recovered Wall	Shrunk (mm)	Length (m)	Part Number
5/64	0.078 (1.981)	0.025	0.009	0.5	1.2	STFE4 2.0-1.2MNAT
1/8	0.125 (3.175)	0.037	0.01	0.8		STFE4 3.2-1.2MNAT
3/16	0.187 (4.75)	0.05	0.012	1.2		STFE4 4.8-1.2MNAT
1/4	0.25 (6.35)	0.063		1.3		STFE4 6.4-1.2MNAT
3/8	0.375 (9.525)	0.096	0.015	2.4		STFE4 9.5-1.2MNAT
1/2	0.5 (12.7)	0.144		3.2		STFE4 12.7-1.2MNAT
3/4	0.75 (19.05)	0.224		4.8		STFE4 19.0-1.2MNAT
1	1 (25.4)	0.278		6.3		STFE4 25.4-1.2MNAT

Dimensions : Inches (Millimetres) (Unless Specified)

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.

# X-ON Electronics

Authorized Distributor

*Click to view similar products for [Wire Identification](#) category.*

*Click to view products by [Pro Power](#) manufacturer.*

Other Similar products are found below :

[H100X034H2T2B](#) [H200X044H2T](#) [H200X034F1T](#) [H100X084F2T](#) [H100X044F13](#)

[H100X025H1T2](#) [H100X025F1TB](#) [11631010](#) [PT2SBLK](#) [PT2SARW](#) [PPM15](#) [PMDR4049](#)

[D10273000](#) [RT250R9X2](#) [SBPTFE9NATURAL](#) [RO2011401WH](#) [LHS124TW0](#)

[LHS31TWF](#) [HIS3186PEXRD](#) [HIS34013MIX](#) [2600X2140](#) [HTDU6OFO](#) [HTDU3RE](#)

[HTDU3OFO](#) [AD15201CRIMPTOOLASSY](#)