

OGKG0572

OPTICAL SENSORS • FORKED LIGHT BARRIERS

sensor optical, fork, 194x12x140mm, fork width 170mm, 10-30V DC, 1x PNP/NPN NC/NO, IO-Link, Connector M8 3pin, IP67, Zinc die-cast+Glass, Red light, 5kHz pulsed, Manual adjustment



MECHANICAL FEATURES

| | |
|-----------------------------|------------------|
| Ambient temperature | -25 °C ... 60 °C |
| Degree of protection (IP) | IP67 |
| Design | Cuboid |
| Fork depth | 110 mm |
| Fork light barrier design | Furcate |
| Fork width | 170 mm |
| Housing material | Zinc die-cast |
| Material of optical surface | Glass |
| Sensor height | 194 mm |
| Sensor length | 12 mm |
| Sensor width | 140 mm |

ELECTRICAL FEATURES

| | |
|------------------------------|---------------------|
| Analog output 0 V ... 10 V | - |
| Analog output 4 mA ... 20 mA | - |
| Connection to amplifier | - |
| Decay time | 0.1 ms |
| Equipment protection class | Protection class 3 |
| Hysteresis | 0.1 mm |
| IO-Link compatible | + |
| No-load current | 30 mA |
| Number of pins | 3 |
| Number of switching outputs | 1 |
| Operating voltage | 10 V ... 30 V |
| Rated switching current | 100 mA |
| Relative repeat accuracy | 0.03 mm |
| Repeatability +/- | 30 µm |
| Response time | 0.1 ms |
| Reverse polarity protection | + |
| Scanning function | Light-/dark-on mode |
| Setting procedure | Manual adjustment |
| Short-circuit protection | + |
| Switching frequency | 5000 Hz |

ELECTRICAL FEATURES

| | |
|--------------------------------------|---|
| Type of electrical connection | Connector M8 |
| Type of switching function | Normally closed contact/normally open contact |
| Type of switching output | PNP/NPN |
| Type of the forked light barrier | Standard |
| Voltage drop | 2.8 V |
| Voltage type | DC |
| With communication interface, analog | - |
| With communication interface, RS-232 | - |
| With other analog output | - |
| With time function | - |

OPTICAL FEATURES

| | |
|---------------------|--------|
| Min. object size | 0.5 mm |
| Resolution | 500 µm |
| Light beam form | Point |
| Pulsed light source | + |

OTHER FEATURES

| | |
|--------------------|---|
| Feeding technology | + |
|--------------------|---|

Other


| | |
|----------------------|--------------------------|
| Packaging dimensions | 190mm x 35.0mm x 315.0mm |
| Shipping weight | 0.49kg |
| Tariff code | 85365019 |

Classification

| | |
|-------------------|----------|
| ipf product group | 110 |
| eClass 8.0 | 27270909 |
| eClass 9.0 | 27270909 |
| eClass 9.1 | 27270909 |
| ETIM-5.0 | EC002720 |
| ETIM-6.0 | EC002720 |
| ETIM-7.0 | EC002720 |

Connection

Dimensional drawing

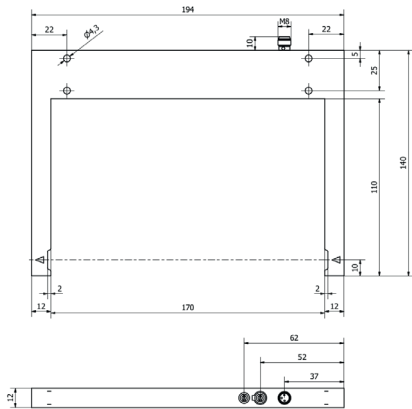

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Software

Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: www.ipf-electronic.com

Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Photoelectric Sensors](#) category:

Click to view products by [IPF ELECTRONIC](#) manufacturer:

Other Similar products are found below :

[7442AD2X5FRX](#) [EX-19B-LP](#) [EX-19SB-PN](#) [7443AR0X5FRX](#) [7452AD4D4NNX](#) [7694ADE04DS2X](#) [FE7C-FRC6S-M](#) [FX-305](#) [PM-R24-R](#)
[Q45VR2FPQ](#) [13104RQD07](#) [E3JUXM4MN](#) [E3L2DC4](#) [E3S3LE21](#) [E3SCT11M1J03M](#) [E3SDS20E21](#) [E3VDS70C43S](#) [E3XNM16](#) [BR23P](#)
[HOA6563-001](#) [OJ-3307-30N8](#) [OS-311A-30](#) [P32013](#) [P34036](#) [P43004](#) [P60001](#) [PB10CNT15PO](#) [S14132](#) [935286-000](#) [S52101](#) [S56258](#) [FD-](#)
[SN500](#) [FE7B-FDRB6-M](#) [SU-79](#) [T36342](#) [T40300](#) [T60001](#) [PD60CNX20BP](#) [FX-302-HY](#) [FZS](#) [PM-T64W](#) [PZ2-51P](#) [CX-491-P-J](#) [CYNUTX10](#)
[UZB802](#) [UZB803](#) [UZFRG1](#) [UZFRG4](#) [UZFRT4](#) [UZFTT8](#)