
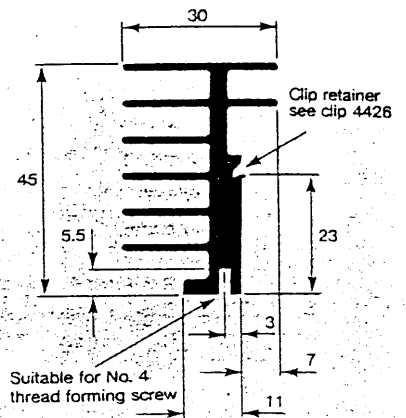


# KM Powersink

New heatsink using minimum board area features threaded slot for board assembly and a clip retaining feature to enable clip 4426 to be used for TO220 assembly.




Finish: Black anodised.  
Custom lengths available to order.

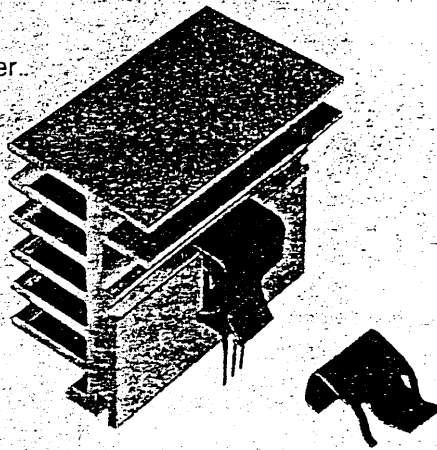

Pattern No.	Length mm	Thermal Rating $\Theta = ^\circ\text{C/W}$
KM50-1	50	5.0
KM75-1	75	3.7
KM100-1	100	2.9
KM150-1	150	2.2

# MP Powersink




Finish: Black anodised.  
Custom lengths available to order.

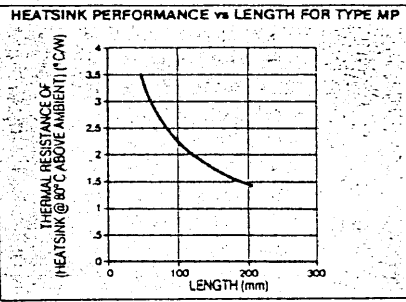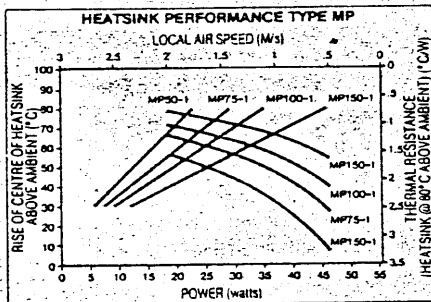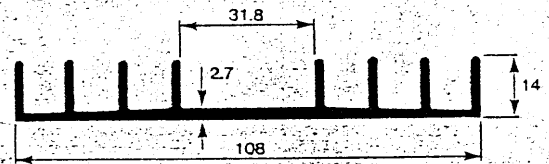

Pattern No.	Length mm	Thermal Rating $\Theta = ^\circ\text{C/W}$
MP50-1	50	3.5
MP75-1	75	2.7
MP100-1	100	2.3
MP150-1	150	1.7

# MQ Powersink

Finish: Black anodised.  
Custom lengths available to order.

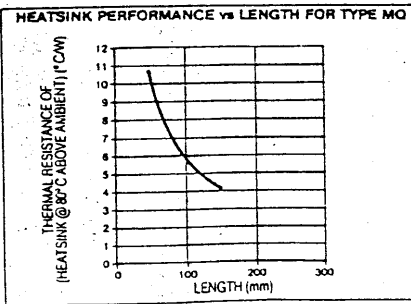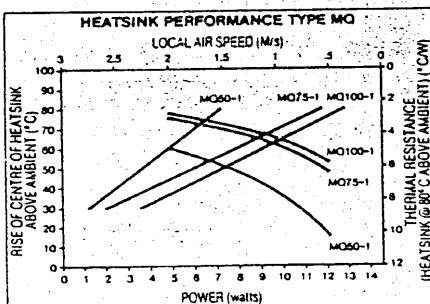

Pattern No.	Length mm	Thermal Rating $\Theta = ^\circ\text{C/W}$
MQ50-1	50	11.0
MQ75-1	75	7.5
MQ100-1	100	6.2

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [avid manufacturer](#):*

Other Similar products are found below :

[4005G](#) [097995X](#) [593101B03600G](#) [0S509-140-U](#) [6W-1](#) [097987X](#) [098047EB](#) [358890](#) [2207/PR11B-2ASSYG](#) [780153U04600G](#)

[622852F00000G](#) [THM6070B](#) [782452F00000G](#) [520329A00000G](#) [241404B91200G318382](#) [025069A](#) [098067H](#) [7023B](#) [320105B00000G](#)

[623352F00000G](#) [607602F00000G](#) [098046G](#) [097990R](#) [358891](#) [654452F00000G](#) [780252F00000G](#) [SoftFlex-B016-20-01-4000-2000](#) [BS595-](#)

[50-B](#) [358894](#) [683601F00000](#) [7138DG](#) [4953G](#) [647061](#) [SW38-4](#) [THM6025B](#) [603402F00000G](#) [783452F00000G](#) [780802F00000G](#) [014379X](#)

[416301U00000G](#) [101800F00000G](#) [568103B00000G](#) [1130BG](#) [416601U00000G](#) [783502F00000G](#) [780652F00000G](#) [780302F00000G](#) [5901G](#)

[420932X](#) [725452F00000G](#)