
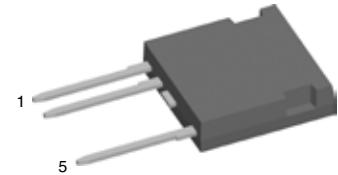


High Voltage Phase Control Thyristor

in High Voltage ISOPLUS i4-PAC™

$V_{DRM} = V_{RRM} = 2200 \text{ V}$
 $I_{T(AV)} = 18 \text{ A}$
 $I_{TSM} = 200 \text{ A}$

V_{RSM}	V_{RRM}	Type
V_{DSM}	V_{DRM}	
V	V	
2300	2200	CS 20-22moF1



Thyristor

Symbol	Conditions	Maximum Ratings		
$V_{DRM / RRM}$		2200		V
$I_{T(AV)}$	sine 180°; $T_C = 90^\circ\text{C}$	18	A	
$I_{T(AV)}$	square; $d = 1/3$; $T_C = 90^\circ\text{C}$	16	A	
I_{TSM}	sine 180°; $t = 10 \text{ ms}$; $V_R = 0 \text{ V}$; $T_{VJ} = 25^\circ\text{C}$	200	A	
$(di/dt)_{cr}$	$T_{VJ} = T_{VJM}$ $f = 50 \text{ Hz}$; $t_p = 200 \mu\text{s}$	repetitive, $I_T = 40 \text{ A}$	100	$\text{A}/\mu\text{s}$
	$V_D = 2/3 V_{DRM}$ $I_G = 0.45 \text{ A}$ $di_G/dt = 0.45 \text{ A}/\mu\text{s}$	non repetitive, $I_T = 20 \text{ A}$	250	$\text{A}/\mu\text{s}$
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM}$; $V_D = 2/3 V_{DRM}$ $R_{GK} = \infty$; method 1 (linear voltage rise)	2500	$\text{V}/\mu\text{s}$	

Symbol	Conditions	Characteristic Values		
		($T_{VJ} = 25^\circ\text{C}$, unless otherwise specified)	typ.	max.
V_T	$I_T = 20 \text{ A}$;	$T_{VJ} = 25^\circ\text{C}$	1.3	1.5
		$T_{VJ} = 125^\circ\text{C}$	1.3	V
V_{GT}	$V_D = 6 \text{ V}$		2.3	V
I_{GT}			250	mA
V_{GD}	$V_D = 2/3 V_{DRM}$;	$T_{VJ} = T_{VJM}$	0.2	V
I_{GD}			5	mA
I_L	$t_p = 10 \mu\text{s}$; $V_D = 6 \text{ V}$ $I_G = 0.45 \text{ A}$; $di_G/dt = 0.45 \text{ A}/\mu\text{s}$		500	mA
I_H	$V_D = 6 \text{ V}$; $R_{GK} = \infty$		150	mA
t_{gd}	$V_D = 1/2 V_{DRM}$ $I_G = 0.45 \text{ A}$; $di_G/dt = 0.45 \text{ A}/\mu\text{s}$		2	μs
I_R, I_D	$V_R = V_{RRM}$; $V_D = V_{DRM}$;	$T_{VJ} = 25^\circ\text{C}$	50	μA
		$T_{VJ} = 125^\circ\text{C}$	2	mA
R_{thJC}	DC current		0.92	K/W

Features


- high voltage thyristor
 - for line frequency
 - chip technology for long term stability
- ISOPLUS i4-PAC™ high voltage package
 - isolated back surface
 - enlarged creepage towards heatsink
 - enlarged creepage between high voltage pins
 - application friendly pinout
 - high reliability
 - industry standard outline

Applications

- controlled rectifiers
 - power supplies
 - drives
- AC switches
- capacitor discharge control
 - flash tubes
 - X-ray and laser generators

Component				
Symbol	Conditions	Maximum Ratings		
T_{VJ}		-40 ... +125		°C
T_{stg}		-55 ... +125		°C
V_{ISOL}	$I_{ISOL} \leq 1 \text{ mA}; 50/60 \text{ Hz}$	2500	V~	
F_c	mounting force with clip	20...120	N	
Symbol		Characteristic Values		
		min.	typ.	
d_s, d_A	A pin - K pin pin - backside metal	7 5.5		mm mm
R_{thCH}	with heatsink compound		0.15	K/W
Weight			5.5	g

Dimensions in mm (1 mm = 0.0394")

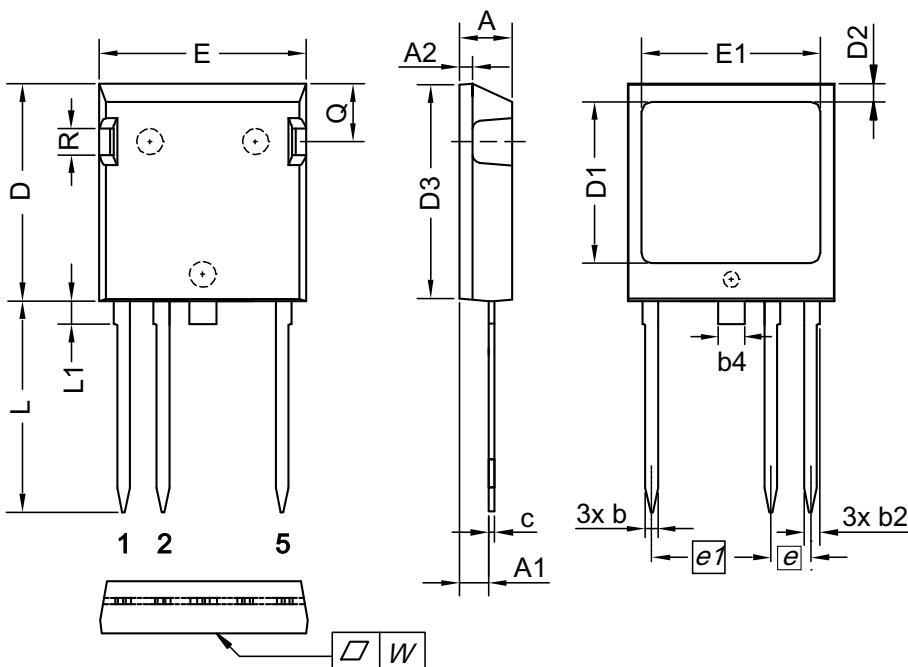

Dim.	Millimeter		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	2.16	0.046	0.085
b	1.14	1.40	0.045	0.055
b2	1.47	1.73	0.058	0.068
b4	2.54	2.79	0.100	0.110
c	0.51	0.74	0.020	0.029
D	20.80	21.34	0.819	0.840
D1	14.99	15.75	0.590	0.620
D2	1.65	2.03	0.065	0.080
D3	20.30	20.70	0.799	0.815
E	19.56	20.29	0.770	0.799
E1	16.76	17.53	0.660	0.690
e	3.81	BSC	0.150	BSC
e1	11.43	BSC	0.450	BSC
L	19.81	21.34	0.780	0.840
L1	2.11	2.59	0.083	0.102
Q	5.33	6.20	0.210	0.244
R	2.54	4.57	0.100	0.180
W	-	0.10	-	0.004

Die konvexe Form des Substrates ist typ. < 0.05 mm über der Kunststoffoberfläche der Bauteilunterseite
The convexbow of substrate is typ. < 0.05 mm over plastic surface level of device bottom side

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SCRs](#) category:

Click to view products by [IXYS](#) manufacturer:

Other Similar products are found below :

[NTE5428](#) [T1500N16TOF VT](#) [TT162N16KOF-A](#) [TT162N16KOF-K](#) [TT330N16AOF](#) [VS-22RIA20](#) [VS-2N685](#) [057219R](#) [T1190N16TOF VT](#)
[T1220N22TOF VT](#) [T201N70TOH](#) [T700N22TOF](#) [T830N18TOF](#) [TT250N12KOF-K](#) [VS-16RIA120](#) [VS-110RKI40](#) [NTE5427](#) [NTE5442](#)
[TT251N16KOF-K](#) [VS-22RIA100](#) [VS-16RIA40](#) [TD250N16KOF-A](#) [VS-ST110S16P0](#) [T930N36TOF VT](#) [T2160N24TOF VT](#) [T1190N18TOF](#)
[VT](#) [T1590N28TOF VT](#) [2N1776A](#) [T590N14TOF](#) [NTE5375](#) [NTE5460](#) [NTE5481](#) [NTE5512](#) [NTE5514](#) [NTE5518](#) [NTE5519](#) [NTE5529](#)
[NTE5553](#) [NTE5555](#) [NTE5557](#) [NTE5567](#) [NTE5570](#) [NTE5572](#) [NTE5574](#) [NTE5576](#) [NTE5578](#) [NTE5579](#) [NTE5589](#) [NTE5592](#) [NTE5598](#)