

Rectifier Diode

Avalanche Diode

Type	Replacement
DS2-12A	DSA1-12D
DSA2-12A	DSA1-12D
DSA2-16A	DSA1-16D
DSA2-18A	DSA1-18D

V_{RRM} = 1200-1800 V
I_{F(RMS)} = 7 A
I_{F(AV)M} = 3.6 A

V _{RSM} V	V _{(BR)min} V	V _{RRM} V	Standard Types	Avalanche Types
1300	1300	1200	DS 2-12A	DSA 2-12A
1700	1750	1600		DSA 2-16A
1900	1950	1800		DSA 2-18A

① Only for Avalanche Diodes



A = Anode C = Cathode

Symbol Test Conditions

$I_{F(RMS)}$	$T_{VJ} = T_{VJM}$		7	A
$I_{F(AV)M}$	$T_{amb} = 45^\circ\text{C}; R_{thJA} = 30 \text{ K/W}; 180^\circ \text{ sine}$		3.6	A
	$T_{amb} = 45^\circ\text{C}; R_{thJA} = 115 \text{ K/W}; 180^\circ \text{ sine}$		1.2	A
P_{RSM}	DSA types, $T_{VJ} = 25^\circ\text{C}, t_p = 10 \mu\text{s}$		2.5	kW
I_{FSM}	$T_{VJ} = 45^\circ\text{C}; V_R = 0$ $t = 10 \text{ ms (50 Hz), sine}$ $t = 8.3 \text{ ms (60 Hz), sine}$		120	A
	$T_{VJ} = T_{VJM}$ $V_R = 0$ $t = 10 \text{ ms (50 Hz), sine}$ $t = 8.3 \text{ ms (60 Hz), sine}$		100	A
	$T_{VJ} = T_{VJM}$ $V_R = 0$ $t = 10 \text{ ms (50 Hz), sine}$ $t = 8.3 \text{ ms (60 Hz), sine}$		106	A
I^2t	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0$ $t = 10 \text{ ms (50 Hz), sine}$ $t = 8.3 \text{ ms (60 Hz), sine}$		72	A^2s
	$T_{VJ} = T_{VJM}$ $V_R = 0$ $t = 10 \text{ ms (50 Hz), sine}$ $t = 8.3 \text{ ms (60 Hz), sine}$		68	A^2s
T_{VJM}			180	$^\circ\text{C}$
T_{VJ}			-40...+180	$^\circ\text{C}$
T_{stg}			-40...+180	$^\circ\text{C}$
Weight		2.4	g	

Symbol Test Conditions

Symbol	Test Conditions	Characteristic Values		
		\leq	2	mA
I_R	$T_{VJ} = 180^\circ\text{C}; V_R = V_{RRM}$			
V_F	$I_F = 7 \text{ A}; T_{VJ} = 25^\circ\text{C}$		≤ 1.25	V
V_{TO}	For power-loss calculations only		0.85	V
r_T	$T_{VJ} = T_{VJM}$		43	$\text{m}\Omega$
R_{thJA}	Forced air cooling with 1.5 m/s, $T_{amb} = 45^\circ\text{C}$ Soldered between 2 cooling fins, $T_{amb} = 45^\circ\text{C}$ Soldered onto PC board (25 mm), $T_{amb} = 45^\circ\text{C}$ Free air cooling, $T_{amb} = 45^\circ\text{C}$		30 37 75 115	K/W
d_s	Creepage distance on surface		2.25	mm
d_A	Strike distance through air		2.25	mm
a	Max. allowable acceleration		100	m/s^2

Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions

© 2019 IXYS All rights reserved

Features

- International standard package
- Axial wire connexions
- Planar glassivated chips


Applications

- Low power rectifiers
- Field supply for DC motors
- Power supplies
- High voltage rectifiers






Advantages

- Space and weight savings
- Simple PCB mounting
- Improved temperature and power cycling
- Reduced protection circuits

Dimensions in mm (1 mm = 0.0394")

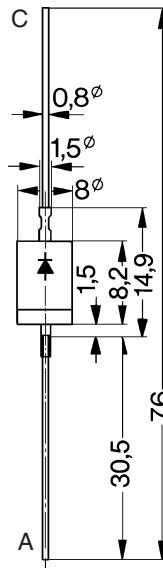

20190130b

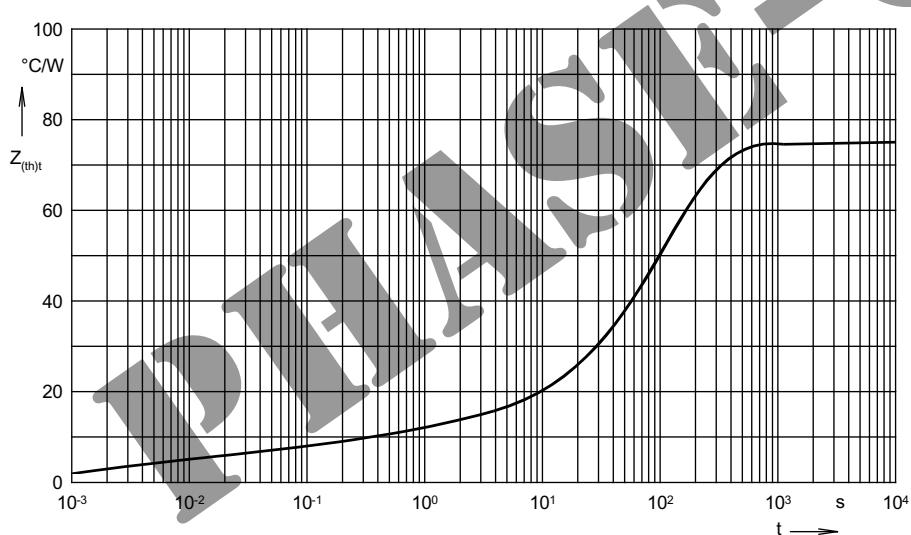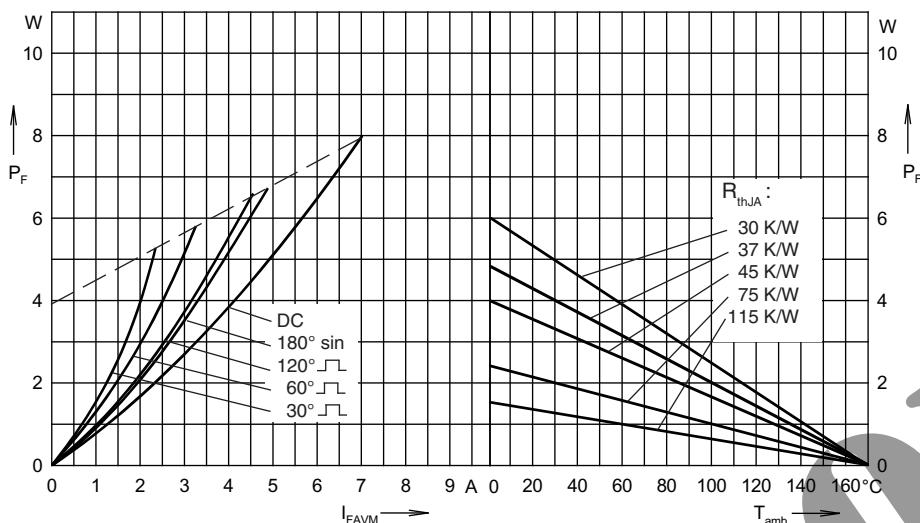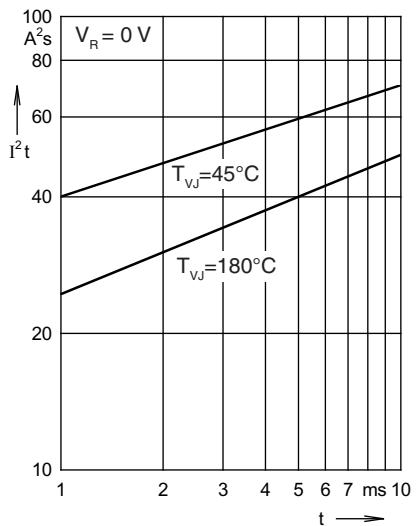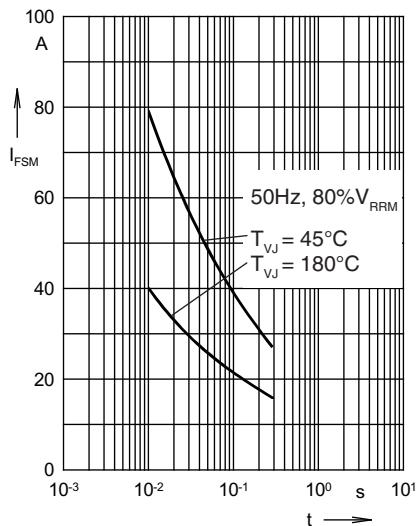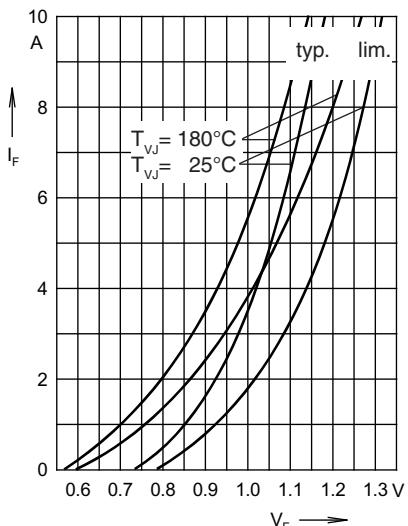

R_{thJA} for various conduction angles d:

d	R_{thJA} (K/W)
DC	75
180°	75.7
120°	76.1
60°	76.7
30°	77.4

Constants for Z_{thJA} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.15	0.001
2	10.85	0.1
3	64	35

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by IXYS manufacturer:

Other Similar products are found below :

[RD0306T-H](#) [BAQ33-GS18](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE525](#) [NTE571](#) [NTE574](#) [NTE5804](#) [NTE5806](#) [NTE6244](#)
[1SS181-TP](#) [1SS193,LF](#) [1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#)
[1N914BTR](#) [RFUH20TB3S](#) [BAS 28 E6327](#) [BAV199-TP](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [LL4151-GS18](#)
[053684A](#) [SMMSD4148T3G](#) [707803H](#) [SP000010217](#) [ACDSW4448-HF](#) [CDSZC01100-HF](#) [BAV199E6433HTMA1](#) [BAV70M3T5G](#)
[SMBT2001T1G](#) [NTE5801](#) [NTE5800](#) [NTE5808](#) [NTE6240](#) [NTE6248](#) [DLM10C-AT1](#) [BAS28-7](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#)