



# Avalanche Diode

## Replacements see below

$V_{RSM}$	$V_{(BR)min}$	$V_{RRM}$	Type
V	V	V	
1300	1300	1200	DSA 9-12F
1700	1750	1600	DSA 9-16F
1900	1950	1800	DSA 9-18F



$V_{RRM} = 1200-1800\text{ V}$   
 $I_{F(RMS)} = 18\text{ A}$   
 $I_{FAVM} = 11\text{ A}$

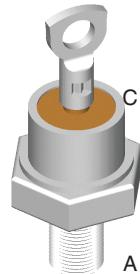

A = Anode, C = Cathode

Symbol	Conditions	Maximum Ratings	
$I_{FRMS}$	$T_{VJ} = T_{VJM}$	18	A
$I_{FAVM}$	$T_C = 150^\circ\text{C}; 180^\circ \text{ sine}$	11	A
$P_{RSM}$	$T_{VJM}, t_p = 10\text{ ms}$	4.5	kW
$I_{FSM}$	$T_{VJ} = 45^\circ\text{C}; t = 10\text{ ms } (50\text{ Hz}), \text{ sine}$ $t = 8.3\text{ ms } (60\text{ Hz}), \text{ sine}$	250 265	A
	$T_{VJ} = 150^\circ\text{C}; t = 10\text{ ms } (50\text{ Hz}), \text{ sine}$ $t = 8.3\text{ ms } (60\text{ Hz}), \text{ sine}$	200 220	A
$I^2t$	$T_{VJ} = 45^\circ\text{C}; t = 10\text{ ms } (50\text{ Hz}), \text{ sine}$ $t = 8.3\text{ ms } (60\text{ Hz}), \text{ sine}$	310 295	$\text{A}^2\text{s}$
	$T_{VJ} = 150^\circ\text{C}; t = 10\text{ ms } (50\text{ Hz}), \text{ sine}$ $t = 8.3\text{ ms } (60\text{ Hz}), \text{ sine}$	200 190	$\text{A}^2\text{s}$
$T_{VJ}$		-40...+180	$^\circ\text{C}$
$T_{VJM}$		180	$^\circ\text{C}$
$T_{stg}$		-40...+180	$^\circ\text{C}$
$M_d$	mounting torque	2.2...2.8	Nm
Weight	typical	5	g

Symbol	Conditions	Characteristic Values	
		typ.	max.
$I_R$	$V_R = V_{RRM}$	$T_{VJ} = T_{VJM}$	3 mA
$V_F$	$I_F = 36\text{ A}$	$T_{VJ} = 25^\circ\text{C}$	1.4 V
$V_{TO}$	For power-loss calculations only	0.85 V	
$r_T$	$T_{VJ} = T_{VJM}$	15 mΩ	
$R_{thJC}$	DC current 180° sine	2 K/W	
$R_{thJH}$	DC current	2.17 K/W	
$d_S$	Creepage distance on surface	3.0 mm	
$d_A$	Strike distance through air	2.0 mm	
$a$	Max. allowable acceleration	100 m/s <sup>2</sup>	

Data according to IEC 60747

Type	Replacements
DSA9-12F	DSI30-12A
DSA9-16F	DSI30-16A
DSA9-18F	contact factory

IXYS reserves the right to change limits, test conditions and dimensions.

© 2019 IXYS All rights reserved

DO-203 AA

### Features

- International standard package JEDEC DO-203 AA
- Planar passivated chips



### Applications

- Supplies for DC power equipment
- DC supply for PWM inverter
- Field supply for DC motors
- Battery DC power supplies

### Advantages







- Space and weight savings
- Simple mounting
- Improved temperature & power cycling
- Reduced protection circuits

Dimensions in mm (1 mm = 0.0394")

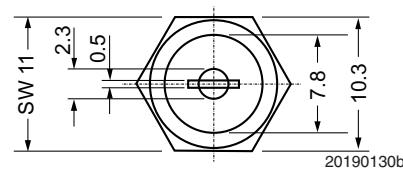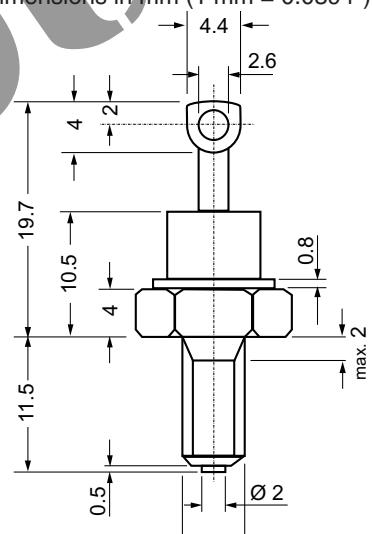

20190130b

1 - 2

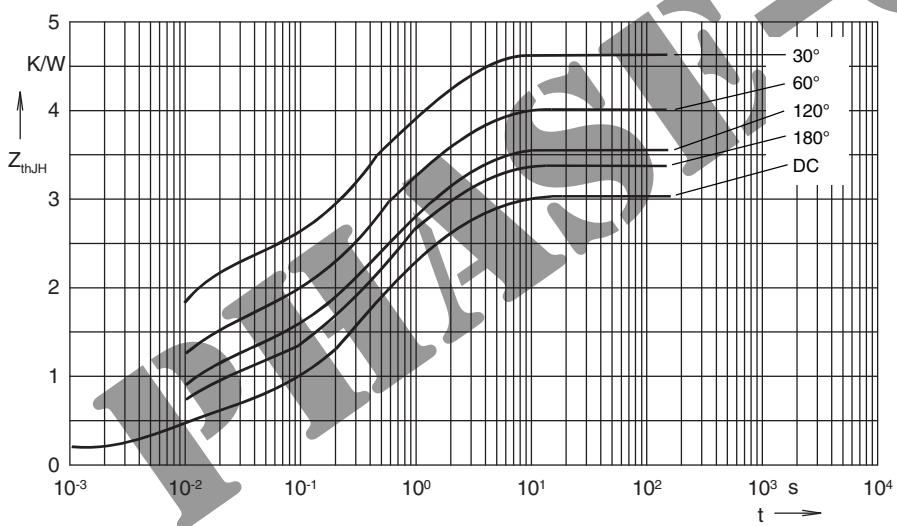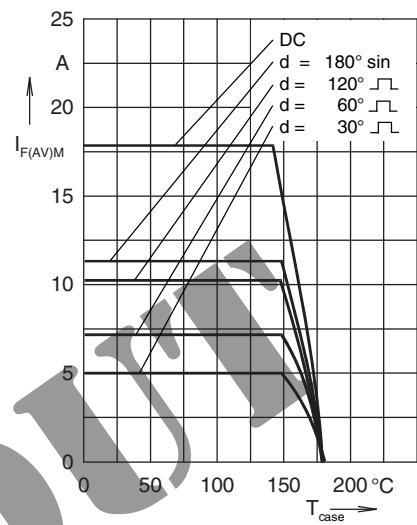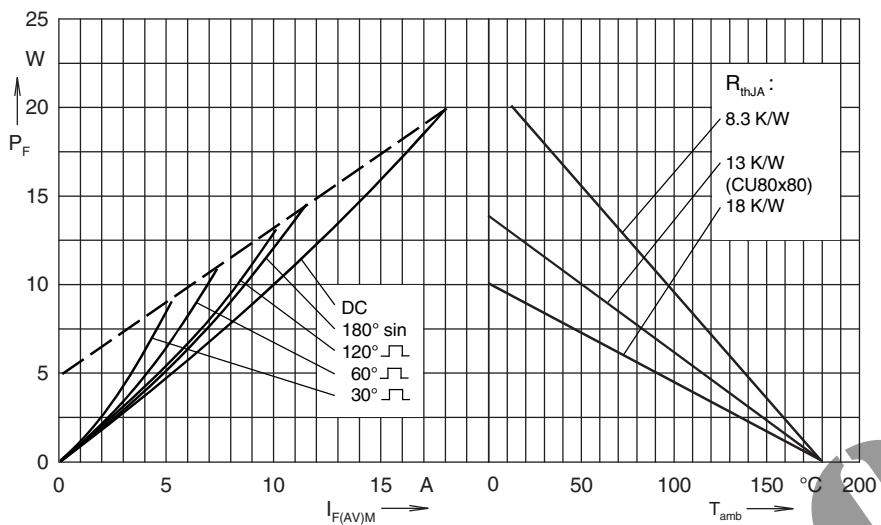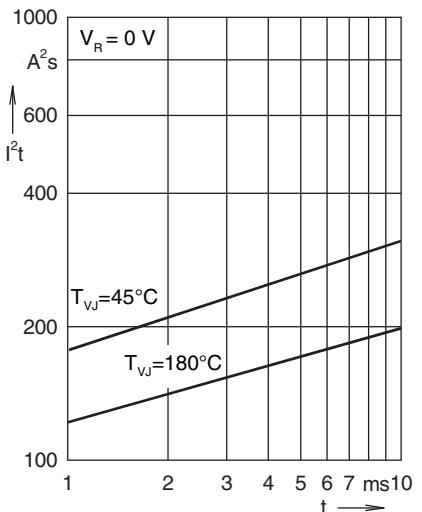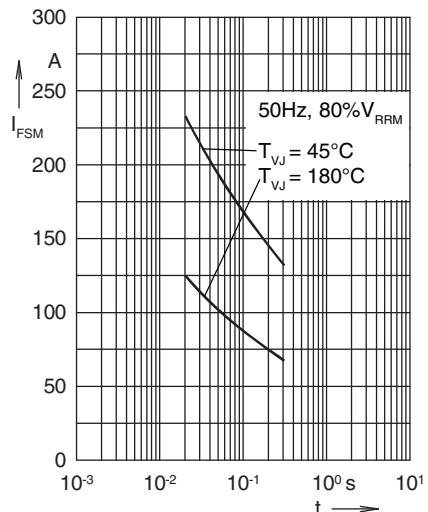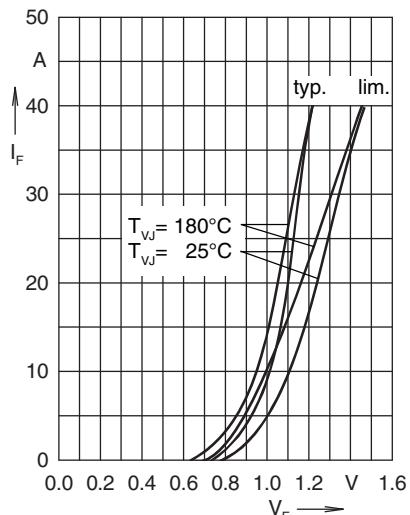

R <sub>thJH</sub> for various conduction angles d:	
d	R <sub>thJH</sub> (K/W)
DC	3.0
180°	3.35
120°	3.56
60°	4.0
30°	4.64

Constants for Z<sub>thJH</sub> calculation:

i	R <sub>thi</sub> (K/W)	t <sub>i</sub> (s)
1	0.095	0.00032
2	0.515	0.0102
3	1.39	0.360
4	1.0	2.30

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Rectifiers category:***

***Click to view products by IXYS manufacturer:***

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [481235F](#)  
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#)  
[CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#) [85HFR60](#) [40HFR60](#)  
[VS-88-7272PBF](#) [70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#) [VS-](#)  
[12FL100S10](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE5990](#) [NTE6358](#) [NTE6162](#) [NTE5850](#)