


Technical data sheet

Bernstein AG Postfach 1164 D-32437 Porto Westfalica Ti2-SU1Z Hw Ro13.5 608.8171.016

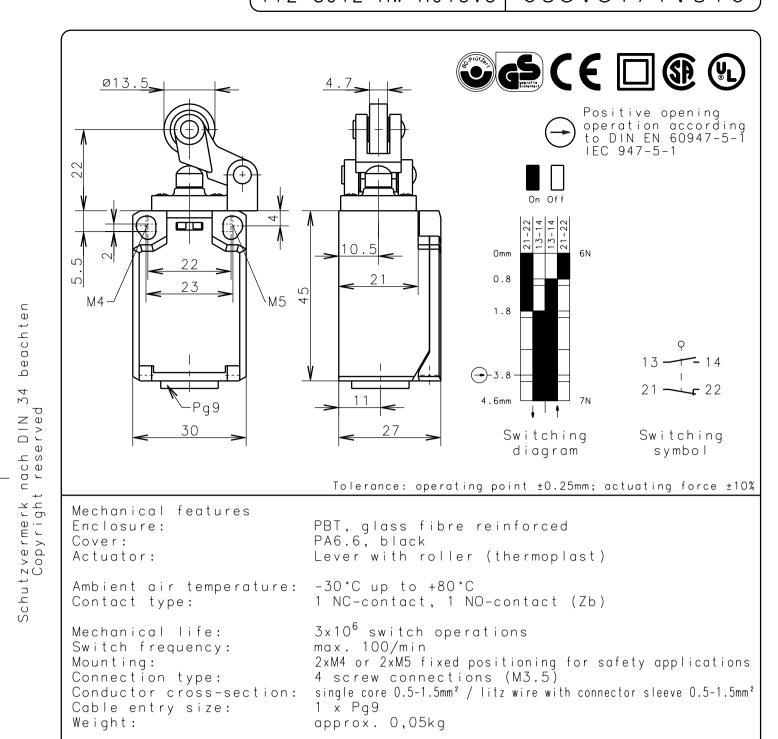

Electrical features Max. voltage: 250 V AC Max. enduring current: 1 th 10A according to Utilization categories.

Max. enduring current: I th TOA

Max. inrush current: according to IEC 947-5-1

Utilization categorie: AC 15,A300 240V/3A, 120V/6A / DC 13,Q300 250V/0.27A, 125V/0.55A

Standards: according to EN 60947-1; EN 60947-5-1

Protection class (IP-Code): IP65 according to EN 60529; DIN VDE 0470 T1

CSA/UL: 10A 300V AC, A300 Short circuit protection: Fuse 6A gL

Approach possibilities By loosening 4 screws it is possible to turn the actuator through 90° so that 4 approach possibilities can be achieved.

The moving parts should be oiled periodically.
The planned protection class (IP-Code) is valid only at closed cover and when using an at least equivalent cable gland.

Copies are not retreated in case of alternations

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Limit Switches category:

Click to view products by Bernstein manufacturer:

Other Similar products are found below:

6LS2-4PG 5ML1-E1 5ML31 LZG1 LZL1-6C 622EN114-R 622EN18-6 622EN224-6B 622EN230 622EN237-R 622EN69-3 622EN85-RB MA-10019 6PA109 7LS51 83547001 83725002 83830001 83840001 83840701 83841001 83870104 83881140 8AS42 8LS10 8LS125-4PG 8LS152-4PGN20 914CE16-3A 914CE3-3L1 915PA10 91MCE16-P2O 924CE16-Y3 924CE1-S6 924CE1-T25A 924CE1-T3 924CE1-T9A 924CE2-T9 924CE31-Y20-X5 924CE31-Y3L1 GL-10054 GL-85710 GL-85714 GLAB26J2B GLDB03C-6 GLZ324 PS21R-NT11N7-YK0 D4A-1106N D4A-3E02N D4A-4510N D4A-4516N