

ERD 4 Series

Double-deck terminals Morsetti a Due Livelli

IMO double level terminals are the answer to high wiring density problems posed by certain unavoidable wiring arrangements. Besides this double level terminals have the following advantages:


- Double wiring density available without extension mounting rails
- Interconnection/shorting can be done at both levels
- Marking/identification by making tags possible at both levels.

I Morsetti IMO a due livelli sono la risposta per cablaggi complessi. Accanto a ciò, questi morsetti hanno i seguenti vantaggi:

- Cablaggio doppio nel medesimo spazio
- Connessione su entrambi i livelli
- Siglatura su entrambi i Livelli.

ERD 4

Width/Larghezza 6mm
319 100i BEIGE/BEIGE

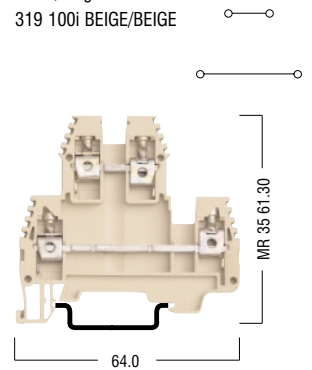

Electrical ratings/Caratteristiche nominali Elettriche

Voltage/Current/Cross section / Tensione/Corrente/Sezione	750V~/34A/4mm ²
VDE/VDE (IEC 60947-7-1)	500V~/32A/4mm ²
UL/UL	300V~/32A/AWG 26-10
Insulation stripping length/Spellatura carvo	9mm

Connection Data/Dati di Connessione

Solid Strand, Screw Connection/Cavo Rigido, Connessione a Vite	0.5.....6mm ²
Fine Strand, Screw Connection/Cavo Flessibile, Connessione a Vite	1.5.....4mm ²
AWG Conductor/Conduttore AWG	26.....10

Ordering Data/Dati di Ordinazione

	Type/Tipo	Cat.No/Nr.Cat	Qty/Q.ta
Poliammide 6.6	ERD4	319 100i	100

Electrical Ratings/Dati Elettrici

Diode Reverse Voltage/Tensione Inversa Diodo


Diode Current/Corrente Diodo


Diode/Diodo



Mounting Rails/Guida di Montaggio






MR 35 x 7.5 MR 35 x 7.5 Slotted/Fessurata	MR 35 x 15 MR 35 x 15 Slotted/Fessurata			
		MR 35x7.5	500 601i	1m
		Slotted/Fessurat	500 602i	1m
		MR 35x7.5	500 603i	2m
		Slotted/Fessurat	500 604i	2m
		MR 35x7.5	500 605i	30cm
		MR 35x15	500 606i	1m
		Slotted/Fessurat	500 607i	1m

End Bracket/Termine di Fissaggio

 ES1	For/Per MR 35 & MR 35 BEIGE/BEIGE For/Per MR 35 BEIGE/BEIGE	ES3	495 030i	100
		ES1	495 040i	100

 Thickness/Spessore 1.5mm	Poliammide 6.6 BEIGE/BEIGE	EP4	449 010i	25
--	-------------------------------	-----	-----------------	----

	CC4/2	474 132i	25
	CC4/3	474 133i	20
	CC4/4	474 134i	15
	CC4/10	474 139i	5

	TF (Ø.2)	493 023i	5
	TF (Ø.4)	493 040i	5
	TSK 4 (Ø2.3)	490 040i	5
	TSK 7 (Ø4)	490 070i	5
	ITK 28 (Ø4)	492 010i	5

	GM BEIGE/BEIGE	GM	496 110i	50
---	----------------	----	-----------------	----

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for imo manufacturer:

Other Similar products are found below :

[20.155MV/12-E](#) [MC14N-S-10110AC](#) [DPS-1-030-24](#) [SRF-1C-SL-12VDC](#) [LDC18RRS](#) [SFSYE0111](#) [21.1500M/6-E](#) [20.3304M/2-E](#)
[21.910M/5-E](#) [20.95MA/2-E](#) [21.95MHF/2-E](#) [PE69-4032](#) [DPS-1-060-24](#) [CS20A-A2](#) [CS20A-U1](#) [VFC02](#) [MSSTC11DA06](#) [20.2500M/4-E](#)
[20.95MHF/3-E](#) [B3T10](#) [XKL-040-21](#) [20.3304M/4-E](#) [SRDH-1A-SL-24VDC](#) [20.2500M/5-E](#) [21.155MH/12](#) [SRRHN-2CN-SL-12VDC](#)
[QYE21XXF24DC](#) [20.920M/5-E](#) [21.1550MF/8-E](#) [20.910M/6-E](#) [20.95MH/3-E](#) [MC10N-S-10110AC](#) [21.95MV/3](#) [MB09-S-1024](#) [MA05-S-](#)
[01230AC](#) [SRRHN-2CN-SL-5VDC](#) [LB69-4040](#) [20.3001M/6](#) [SRGA-1A-SL-24VDC](#) [21.1500M/3-E](#) [21.95MHF/6-E](#) [20.95MV/2-E](#)
[20.155MV/4-E](#) [ER2.5BEIGE](#) [20.950M/2-E](#) [MT5 1-50-FAR](#) [BS3P3REDO](#) [MB12-S-10=24](#) [MA05-S-1024DC](#) [20.155MVF/8-E](#)