

SCHOTTKY BARRIER RECTIFIERS**FEATURES**

- High current rectifier Schottky diodes
- Low voltage, low inductance
- For detection and step-up-conversion

SOD-323**MECHANICAL DATA**

- Case: SOD-323
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 5.48mg/0.00019oz

CIRCUIT DIAGRAM**MARKING**

Type number	Marking code
BAT60B	W5

Maximum Ratings and Electrical characteristics Ratings at 25 °C
ambient temperature unless otherwise specified.

Parameter	Symbols	BAT60B	Units
Non-repetitive Peak Reverse Voltage	V_{RRM}	10	V
Forward Current	I_F	3	A
Forward Surge Current at 8.3ms	I_{FSM}	20	A
Power Dissipation at $T_c=25^\circ\text{C}$	P_D	350	mW
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150	°C

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbols	BAT60B	Units
Maximum Forward Voltage $I_F=10 \text{ mA}$ $I_F=100 \text{ mA}$ $I_F=500 \text{ mA}$ $I_F=1000 \text{ mA}$	V_F	0.30 0.38 0.50 0.60	V
Peak Reverse Current $V_{R1}=5V$ $V_{R2}=8V$	I_R	15 20	μA
Diodes Capacitance $V_R=5V, f=1\text{MHz}$	C_T	30	pF

TYPICAL CHARACTERISTICS

Fig.1 Power Derating Curve

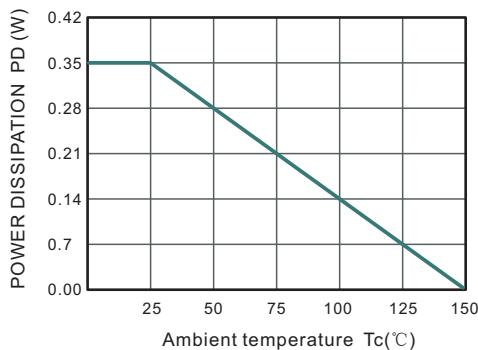


Fig.2 Typical Reverse Characteristics

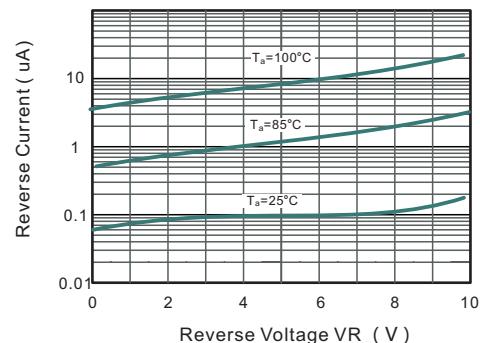


Fig.3 Typical Junction Capacitance

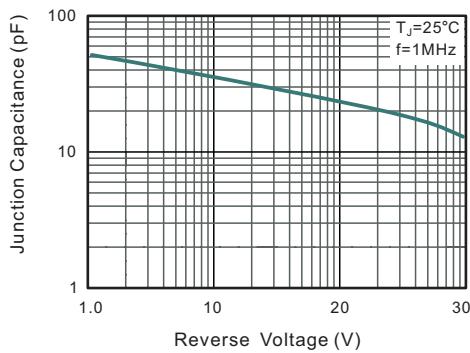


Fig.4 Typical Forward Characteristic



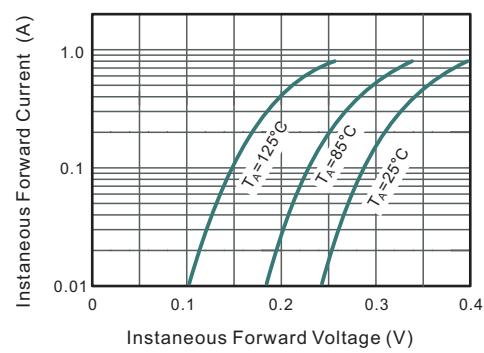


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

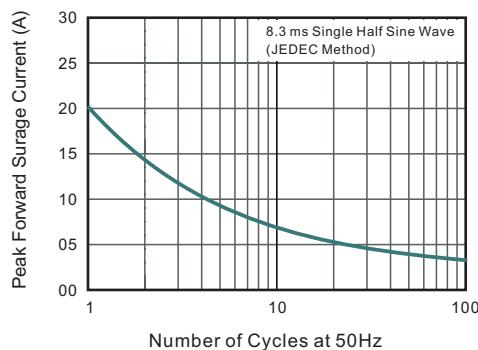

SOD-323 PACKAGE OUTLINE DRAWING

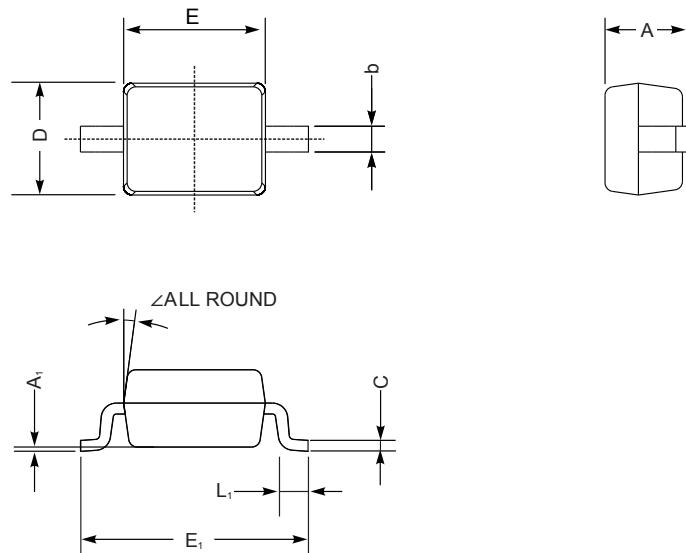

SYM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.8	1.1	0.032	0.043
C	0.08	0.15	0.0031	0.0059
D	1.2	1.4	0.047	0.055
E	1.4	1.8	0.063	0.070
E ₁	2.55	2.75	0.100	0.108
b	0.25	0.40	0.0098	0.016
L ₁	0.2	0.45	0.0079	0.016
A ₁	---	0.2	---	0.008
∠	9°		9°	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by JESTEK manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS16E6433HTMA1](#)
[BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#)
[SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MA4E2501L-1290](#)
[MBRB30H30CT-1G](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#)
[NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA2100-HF](#)
[ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ060-M3/5BT](#)
[NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#)