

# ROHS COMPLIANT



## MH CONNECTORS LTD.

OPERATING TEMP: -55°C TO +110°C

MATERIAL: POLYAMIDE PA66 - UL RECOGNIZED MATERIAL  
 SEE COLOR CODE CHART  
 THUMBSCREWS: STEEL, BLACK OXIDE (FOR BLACK HOODS)  
 STEEL, Zn PLATED (FOR COLORED HOODS)



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MH CONNECTORS LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN		P. JENKINS		DATE		03-14-12	
APPROVED		D. CROFT		DATE		03-14-12	
SCALE		NTS		SHEET		OF 1	
REV:		B		REV:		1	
DRAWING No				MHDPPK-SLIM SERIES			

COLOR CODE CHART:  
 BLACK = BK  
 LIGHT GREY = LG  
 DEC GREY = DE  
 RED = R  
 BLUE = B  
 YELLOW = Y  
 GREEN = G  
 WHITE = W

ORDERING INFORMATION: (YY = COLOR)

SIZE	P/N - KITTED:	P/N - BULK:
9-WAY	MHDPPK9-YY-K	MHDPPK9-YY
15-WAY	MHDPPK15-YY-K	MHDPPK15-YY
25-WAY	MHDPPK25-YY-K	MHDPPK25-YY
37-WAY	MHDPPK37-YY-K	MHDPPK37-YY
50-WAY	MHDPPK50-YY-K	MHDPPK50-YY

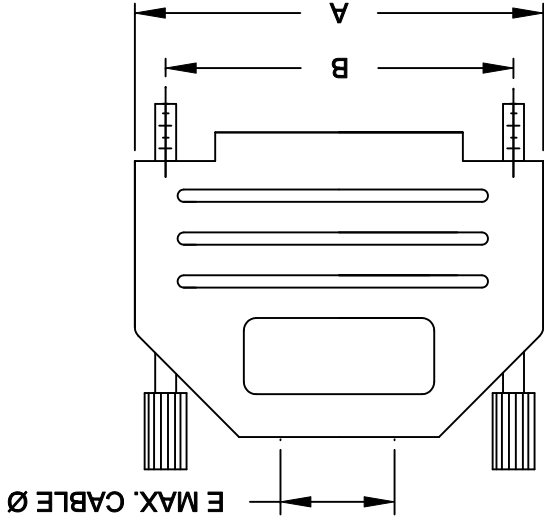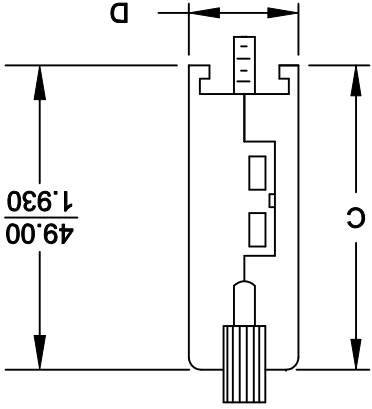

SIZE	A		B		C		D		E	
	±.38	±.25	±.015	±.015	±.015	±.015	±.015			
9	31.50	24.99	34.00	15.00	8.00	1.240	0.984	1.339	0.591	0.315
15	40.00	33.32	34.00	15.00	11.50	1.575	1.312	1.339	0.591	0.453
25	53.50	47.04	40.00	15.00	11.50	2.106	1.852	1.575	0.591	0.453
37	71.00	63.50	40.00	15.00	11.50	2.795	2.500	1.575	0.591	0.453
50	67.50	61.11	40.00	19.00	14.00	2.657	2.406	1.575	0.748	0.551

BACKSHELL KIT INCLUDES:  
 (1) BACKSHELL  
 (2) 4-40 THUMBSCREWS  
 (1) PLASTIC STRAIN RELIEF  
 (1) METAL STRAIN RELIEF CLAMP  
 (2) STRAIN RELIEF SCREWS  
 TORQUE VALUE ON PLASTIC FOR STRAIN RELIEF SCREWS = 4 INCH POUNDS MAX.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [mh connectors](#) manufacturer:*

Other Similar products are found below :

[MHDCMR37-ULP](#) [C88E310000](#) [MHD45ZK25-DM25P-K](#) [MHCCOV-25SC-BK](#) [MHDTZK15-RA-K](#) [DSSKP15L-DB15S-K](#) [DSSKM15L-DB15S-K](#) [MHDM25-DM25P-K](#) [MHRJ126P4CR](#) [BNC4MML1MRG58](#) [RJ45SRB-RET-O](#) [MHDPPK25-Y-K](#) [MHCCOV-9ME](#) [BNCL2.0MRG58](#) [MHDD15-F-T-B-M](#) [MHDD9-M-T-B-M](#) [MHDM15-K](#) [MHDTZK25-K](#) [MHRJ126P6CR](#) [MHDM9-DB9P-K](#) [RJ45SRB-LGREY](#) [MHED-DS25S](#) [BNCL1.0MRG58](#) [MHDM25-K](#) [RG58SRB-G](#) [MHD45PK37-K](#) [MHDTPPK25-DB25SK](#) [MHDU45ZK09-K](#) [DA9-PMJ8-B-K](#) [MHD45ZK50-K](#) [MHDD25-M-T-B-S](#) [MHDB50SP](#) [MH3101S-8821](#) [RG58SRB-R](#) [MHRJ116P4CR](#) [MHTRI-M-9-K](#) [MHDD25-F-T-B-M](#) [MHDM9-DB9S-K](#) [MHDPPK-M-37-K](#) [MHDTPPK37-K](#) [DA9-SMJ8-R-K](#) [RG58SRB-BE](#) [MHDM25-DB25P-K](#) [GA0909FFLGK-RC](#) [MHCCOV-15SN-LG](#) [MHDTZK9-RA-K](#) [DSSKM25L-DB25P-K](#) [MHD45ZK9-DM9P-K](#) [MHDVSL25-K](#) [MHCCOV-25SC-LG](#)