





**Switching Diodes**


**FEATURES**

- Fast Switching Speed
- For General Purpose Switching Applications
- High Conductance


**SOT-23**



**BAW56**



**BAV70**



**BAV99**

**Maximum Ratings @Ta=25°C**

Parameter	Symbol	Value	Unit
Reverse Voltage	$V_R$	70	V
Forward Current	$I_F$	200	mA
Non-Repetitive Peak Forward Surge Current @t=8.3ms	$I_{FSM}$	2.0	A
Power Dissipation	$P_D$	225	mW
Thermal Resistance Junction to Ambient	$R_{thJA}$	556	°C/W
Operation Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 ~ +150	°C

**Electrical Characteristics@Ta=25°C**

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse breakdown voltage	$V_R$	$I_R=100\mu A$	70			V
Forward voltage	$V_{F1}$	$I_F=1\text{ mA}$			0.715	V
	$V_{F2}$	$I_F=10\text{mA}$			0.855	V
	$V_{F3}$	$I_F=50\text{mA}$			1	V
	$V_{F4}$	$V_R=150\text{mA}$			1.25	V
Reverse current	$I_R$	$V_R=70\text{V}$			2.5	uA
Capacitance between terminals	$t_{rr}$	$V_R=0, f=1\text{MHz}$			1.5	pF
Reverse recovery time	$t_{rr}$	$I_F=I_R=10\text{mA}, I_{rr}=0.1 \times I_R, R_L=100\Omega$			6	ns



Fig.1 Power Derating Curve

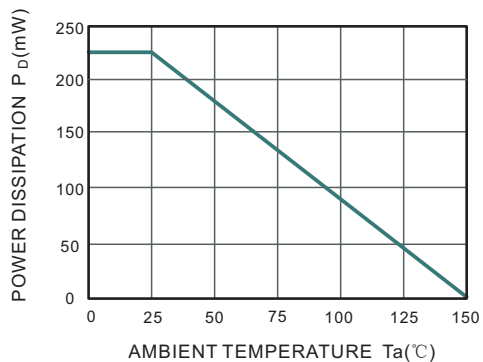


Fig.2 Reverse Characteristics

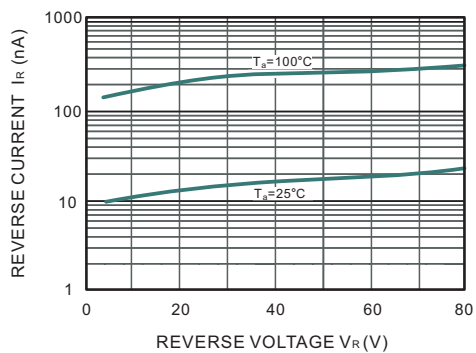


Fig.3 Forward Characteristics



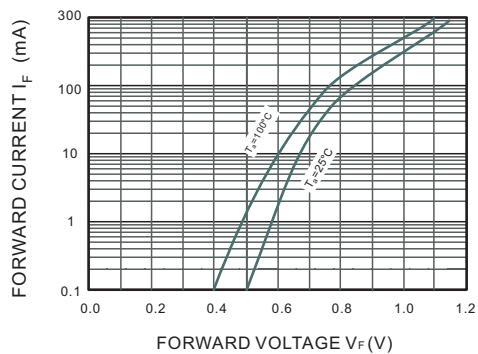


Fig.4 Capacitance Characteristics




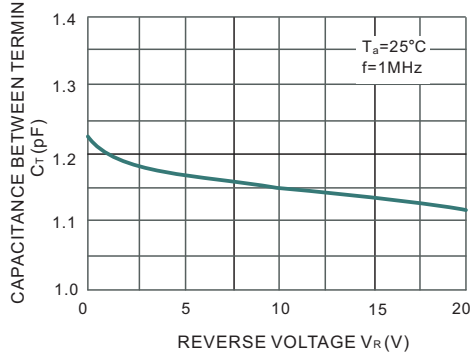

**SOT-23 Package Outline Dimensions**

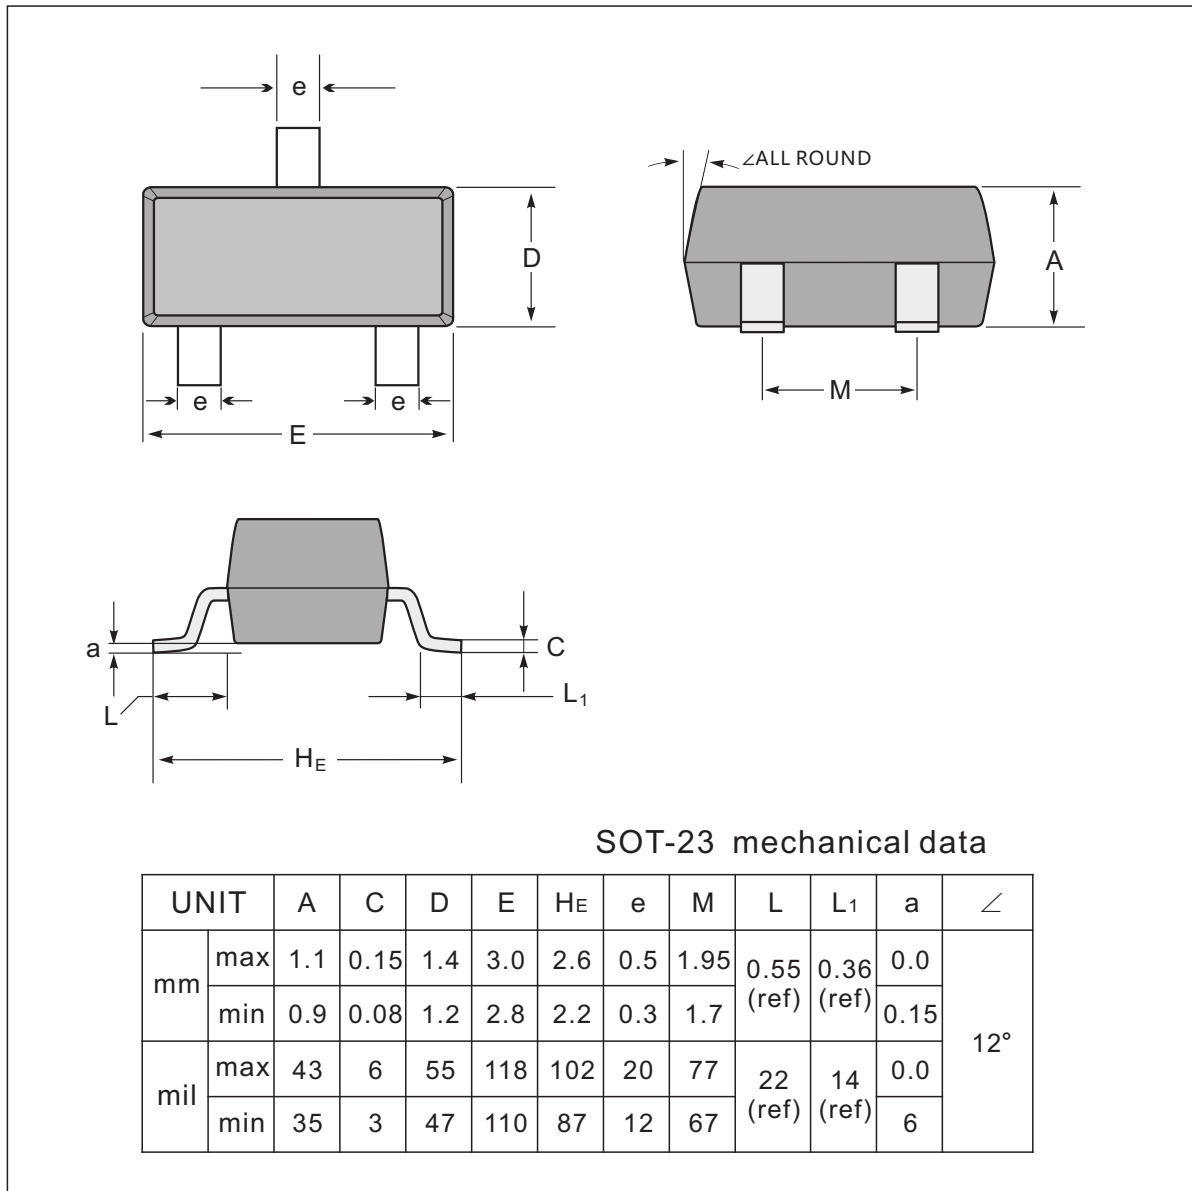

**The recommended mounting pad size**

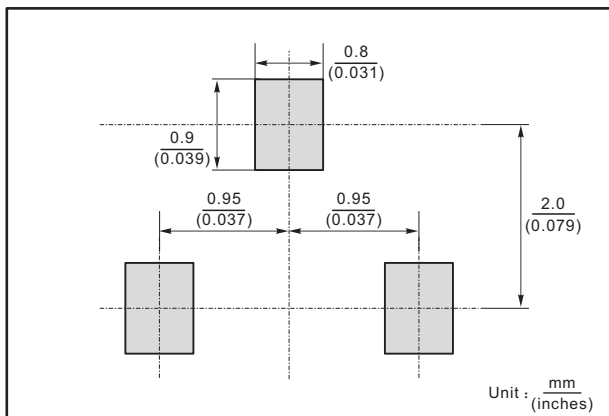


**Marking**

Type number	Marking code
BAW56	A1
BAV70	A4
BAV99	A7




## SOT-23 Packing

1. The method of packaging and dimension are shown as below figure. (Dimension in mm)

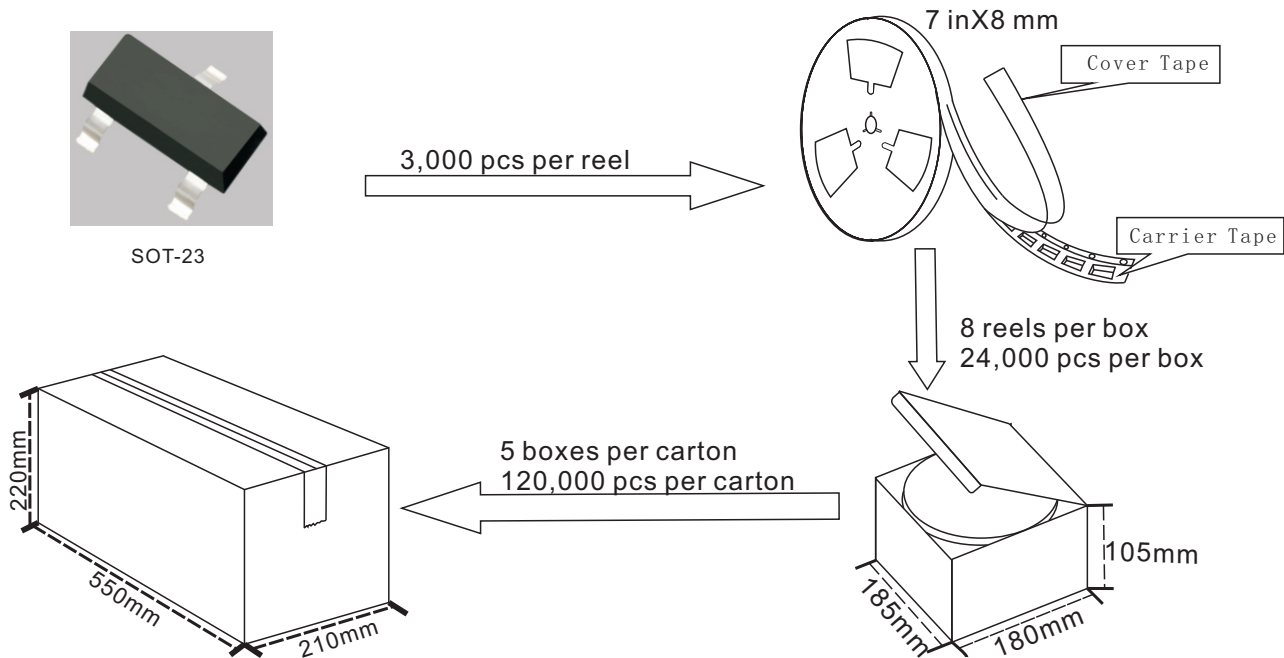


### SOT-23 Embossed Carrier Tape

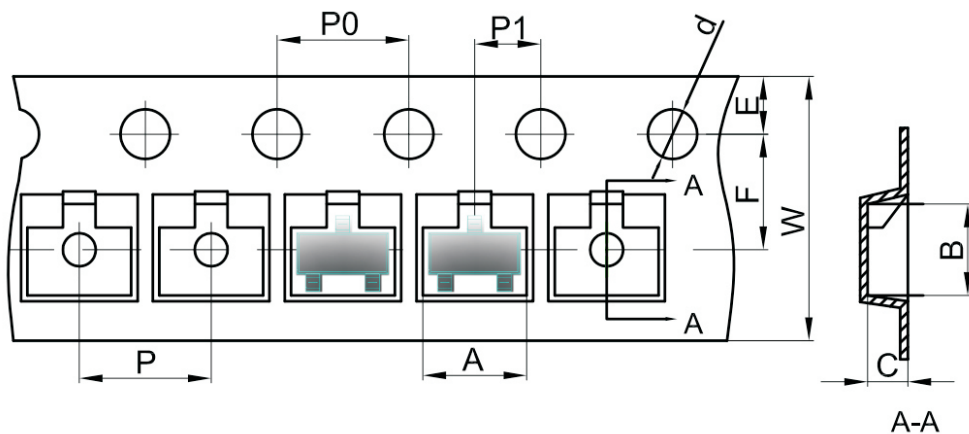

Dimensions are in millimeter

Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

### SOT-23 Tape Leader and Trailer

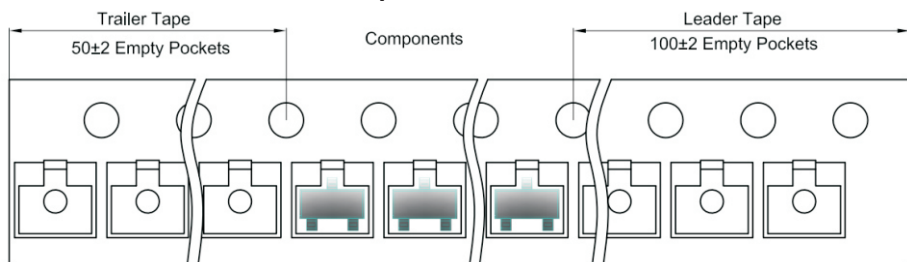

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):*

*Click to view products by [Jingdao manufacturer](#):*

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [BAV17-TR](#) [BAV19-TR](#) [HSC285TRF-E](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#)  
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#) [1SS226-TP](#)  
[RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-GS18](#)  
[053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV199E6433HTMA1](#) [BAS28-7](#)  
[BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#)  
[BAV99HDW-13](#) [NTE6250](#) [NTE582-4](#) [NTE582-6](#)