


**SCHOTTKY BARRIER DIODE**


**APPLICATIONS**

- High frequency switch power supply
- Free wheeling diodes, polarity protection applications



**FEATURES**

- Common cathode structure
- Low power loss, high efficiency
- High Operating Junction Temperature
- Guard ring for overvoltage protection, High reliability
- RoHS product

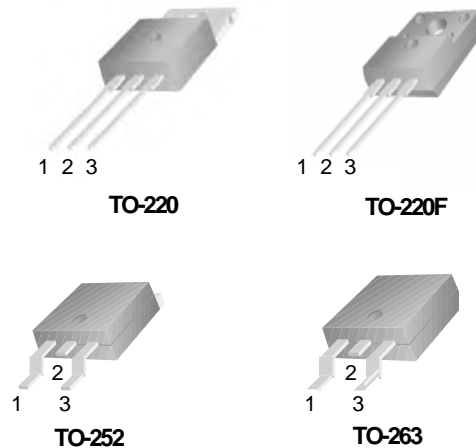

**ORDER INFORMATION**

Product	Package	Pin Assignment			Packing
		1	2	3	
MBR30100CT	TO-220	A	K	A	Tube
MBR30100FCT	TO-220F	A	K	A	Tube
MBR30100YCT	TO-263	A	K	A	Tape Reel
MBR30100DCT	TO-252	A	K	A	Tape Reel

**ABSOLUTE RATINGS (Tc=25°C)**

Parameter		Symbol	Value	Unit
Repetitive peak reverse voltage		$V_{RRM}$	100	V
Maximum DC blocking voltage		$V_{DC}$	100	V
Average forward current	$T_C=150^{\circ}C$ (TO-220/263/ TO-252)	$I_{F(AV)}$	per device	30
	$T_C=125^{\circ}C$ (TO-220F)		per diode	15
Surge non repetitive forward current 8.3 ms single half-sine-wave (JEDEC Method)		$I_{FSM}$	300	A
Maximum junction temperature		$T_j$	150	°C
Storage temperature range		$T_{STG}$	-40~+150	°C


**ELECTRICAL CHARACTERISTICS**

Parameter	Tests conditions		Value(min)	Value(typ)	Value(max)	Unit
$I_R$	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			10	$\mu\text{A}$
$V_F$	$T_j = 25^\circ\text{C}$	$I_F = 15\text{A}$		0.84	0.86	V

**THERMAL CHARACTERISTICS**

Parameter		Symbol	Value(min)	Value(max)	Unit
Thermal resistance from junction to case	TO-220	$R_{th(j-c)}$		2	$^\circ\text{C/W}$
	TO-263			2	
	TO-252			3	
	TO-220F			4	

**ELECTRICAL CHARACTERISTICS (curves)**

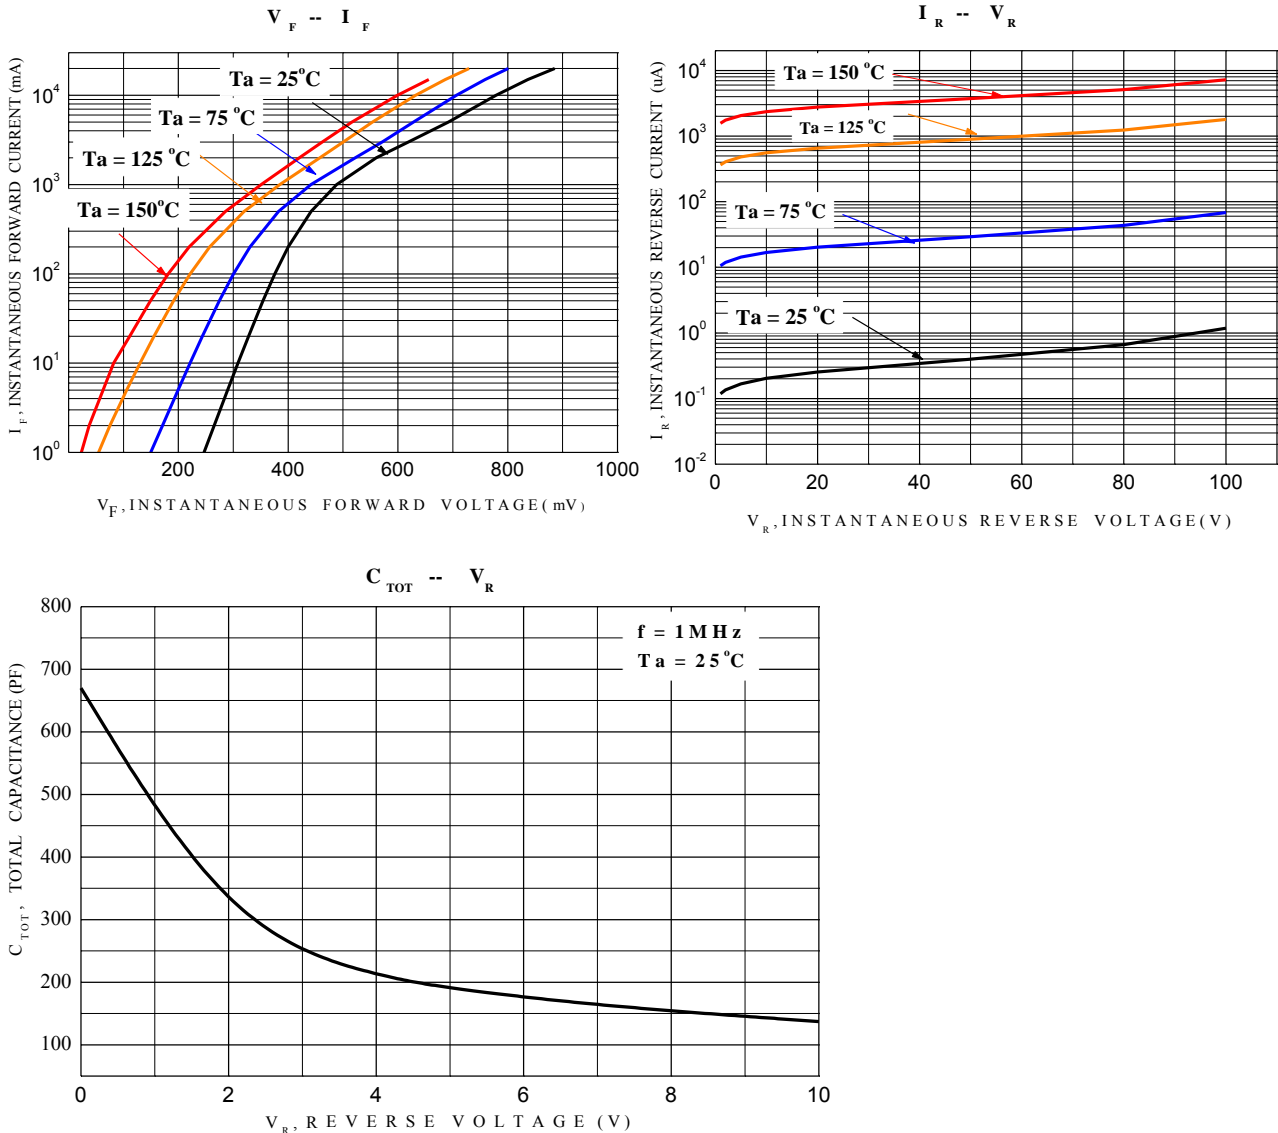

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [Jinyu](#) manufacturer:*

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)