


■ Features

- Low saturation voltage, typically $V_{CE(sat)} = 0.1V$ at $I_C/I_B = 1A/50mA$.
- Excellent DC current gain characteristics.


SOT-89

1.BASE

2.COLLECTOR

3.EMITTER

■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Collector-base voltage	V_{CBO}	60	V
Collector-emitter voltage	V_{CEO}	50	V
Emitter-base voltage	V_{EBO}	6	V
Collector current	I_C	3	A
	I_C (Pulse) *1	6	A
Collector power dissipation	P_C	0.5	W
	P_C *2	2	W
Junction temperature	T_j	150	$^\circ C$
Storage temperature	T_{stg}	-55 to +150	$^\circ C$

 *1. Single pulse, $P_w = 10ms$

 *2. $40 \times 40 \times 0.7mm$ Ceramic board

■ Electrical Characteristics $T_a = 25^\circ C$


Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V_{CBO}	$I_C = 50\mu A$	60			V
Collector-emitter breakdown voltage	V_{CEO}	$I_C = 1mA$	50			V
Emitter-base breakdown voltage	V_{EBO}	$I_E = 50\mu A$	6			V
Collector cutoff current	I_{CBO}	$V_{CB} = 60V$			0.1	μA
Emitter cutoff current	I_{EBO}	$V_{EB} = 5V$			0.1	μA
DC current gain	h_{FE}	$V_{CE} = 2V, I_C = 0.5A$	82		390	
		$V_{CE} = 2V, I_C = 1.5A$	45			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 1A, I_B = 50mA$		0.13	0.35	V
Output capacitance	C_{ob}	$V_{CB} = 10V, I_E = 0A, f = 1MHz$		25		pF
Transition frequency	f_T	$V_{CE} = 2V, I_E = -0.5A, f = 100MHz$		210		MHz

■ h_{FE} Classification

Rank	P	Q	R
h_{FE}	82~180	120~270	180~390

Package Information

SOT-89

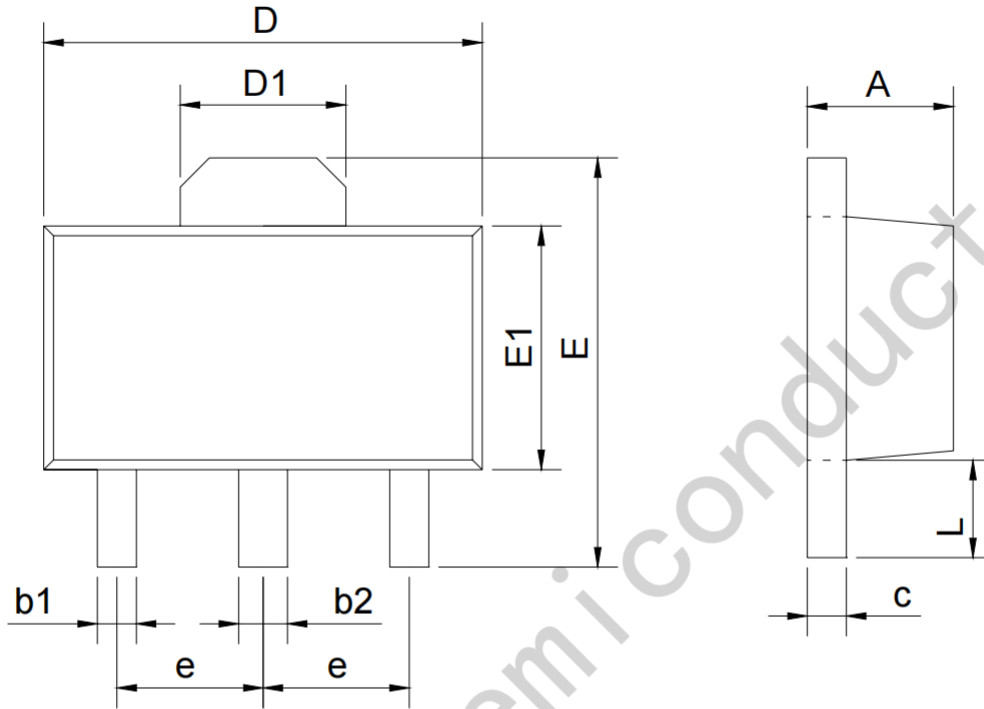

SYMBOL	mm	
	min	max
A	1.40	1.60
b1	0.35	0.50
b2	0.45	0.60
c	0.36	0.46
D	4.30	4.70
D1	1.40	1.80
E	4.00	4.40
E1	2.30	2.70
e	1.50BSC	
L	0.80	1.20

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [JSMSEMI manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [BC856BW-13-F](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#)