

■ Features

- World standard miniature package: SOT-89.
- High collector to base voltage: $V_{CB0} > 100V$.
- Excellent dc current gain linearity: $h_{FE} = 80TYP.$ ($V_{CE} = 2V, I_C = 500mA$).


SOT-89

1.BASE

2.COLLECTOR

3.EMITTER

■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Collector-base voltage	V_{CB0}	100	V
Collector-emitter voltage	V_{CEO}	80	V
Emitter-base voltage	V_{EBO}	5	V
Collector current	I_C	1	A
Collector current (pulse) *	I_C	1.5	A
Total power dissipation at $25^\circ C$ ambient temperature *	P_T	2	W
Junction temperature	T_j	150	$^\circ C$
Storage temperature	T_{stg}	-55 to +150	$^\circ C$

 *1. $PW \leq 10\mu s$, duty cycle $\leq 50\%$

 *2. When mounted on ceramic substrate of $16cm^2 \times 0.7mm$
■ Electrical Characteristics $T_a = 25^\circ C$


Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector cutoff current	I_{CBO}	$V_{CB} = 100V, I_E = 0$			100	nA
Emitter cutoff current	I_{EBO}	$V_{EB} = 5V, I_C = 0$			100	nA
DC current gain *	h_{FE}	$V_{CE} = 2V, I_C = 100mA$	90	200	400	
		$V_{CE} = 2V, I_C = 500mA$	25	80		
Collector-emitter saturation voltage *	$V_{CE(sat)}$	$I_C = 500mA, I_B = 50mA$		0.15	0.5	V
Base-emitter saturation voltage *	$V_{BE(sat)}$	$I_C = 500mA, I_B = 50mA$		0.9	1.5	V
Base-emitter voltage *	V_{BE}	$V_{CE} = 10V, I_C = 10mA$	600	630	700	mV
Gain bandwidth product	f_T	$V_{CE} = 5V, I_E = -10mA$		160		MHz
Output capacitance	C_{ob}	$V_{CB} = 10V, I_E = 0, f = 1.0MHz$		12		pF

 *. $PW \leq 350\mu s$, duty cycle $\leq 2\%$
■ h_{FE} Classification

	BW	BV	BU
	90~180	135~270	200~400

Package Information

SOT-89

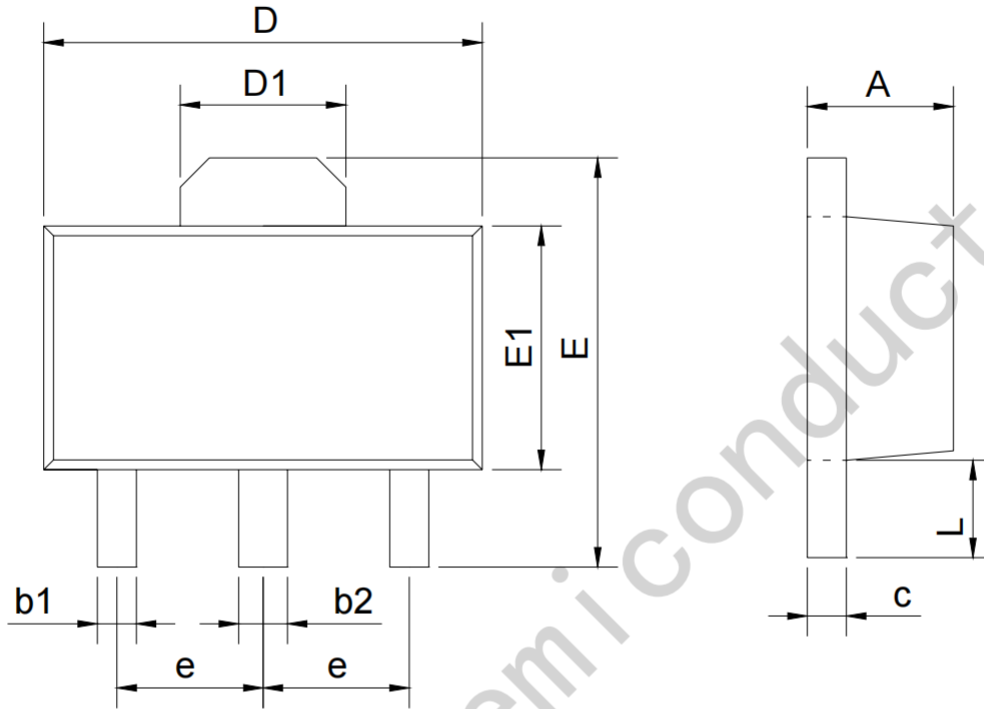

SYMBOL	mm	
	min	max
A	1.40	1.60
b1	0.35	0.50
b2	0.45	0.60
c	0.36	0.46
D	4.30	4.70
D1	1.40	1.80
E	4.00	4.40
E1	2.30	2.70
e	1.50BSC	
L	0.80	1.20

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [JSMSEMI manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [BC856BW-13-F](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#)