


QUAD DIFFERENTIAL COMPARATOR

DESCRIPTION


The LM339 consists of four independent voltage comparators, designed specifically to operate from a single power supply over a wide voltage range.

FEATURES


- *Signal or dual supply operation.
- *Wide operating supply range ($V_{CC}=2V\sim 32V$).
- *Input common-mode voltage includes ground.
- *Low supply current drain $I_{CC}=0.8mA$ (Typical).
- *Open collector outputs for wired and connection.
- *Low input bias current $I_{bias}=25nA$ (Typical).
- *Low output saturation voltage.
- *Output compatible with TTL, DTL, and CMOS logic system.

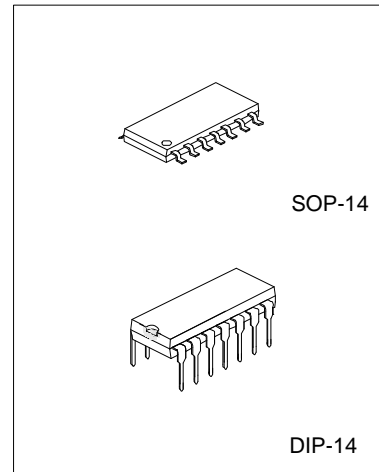

PIN CONFIGURATIONS

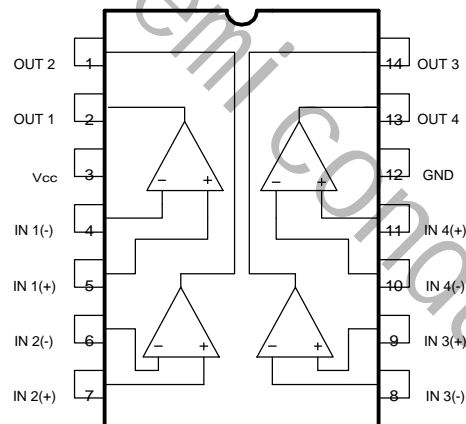

BLOCK DIAGRAM

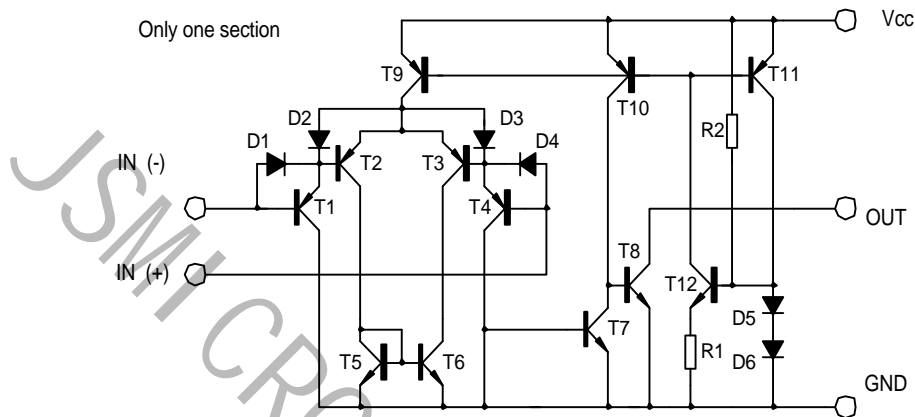

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)






PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	Vcc	+ 16OR 32	V
Differential input Voltage	V _{IDiff}	32	V
Input Voltage	V _I	-0.3~32V	V
Power Dissipation	P _d	570	mW
Operating Temperature	T _{opr}	0 to +70	°C
Storage Temperature	T _{stg}	-65 to 150	°C







ELECTRICAL CHARACTERISTICS

(Vcc=5.0V, Ta=25°C, All voltage referenced to GND unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP.	MAX	UNIT
Input Offset Voltage	V _{io}	V _{CM} =0 to Vcc-1.5 V _{o(p)} =1.4V, R _s =0		+1.5	+5.0	mV
Input Offset Current	I _{io}			+2.3	+50	nA
Input Bias Current	I _b			57	250	nA
Input Common-Mode Voltage Range	V _{I(R)}		0		Vcc-1.5	V
Supply Current	I _{cc}	R _L =∞		1.1	2.0	mA
Large Signal Voltage Gain	G _v	Vcc=15V, R _L >15kΩ	50	200		V/mV
Large Signal Response Time	t _{res}	V _i =TTL logic wing V _{ref} =1.4V, V _R L=5V, R _L =5.1kΩ		350		ns
Response Time	t _{res}	V _R L=5V, R _L =5.1kΩ		1400		ns
Output Sink Current	I _{sink}	V _{i(-)} >1V, V _{i(+)} =0V, V _{o(p)} <1.5V	6	18		mA
Output Saturation Voltage	V _{sat}	V _{i(-)} >1V, V _{i(+)} =0V, I _{sink} =4mA		140	400	mV
Output Leakage Current	I _{leakage}	V _{i(+)} =1V, V _{i(-)} =0 V _{o(p)} = 5V V _{o(p)} =30V		0.1	1.0	nA μA
Differential Input Voltage	V _{I(diff)}				36	V

TYPICAL PERFORMANCE CHARACTERISTICS

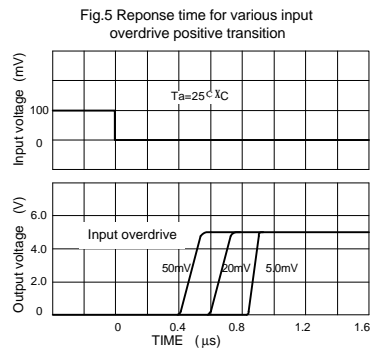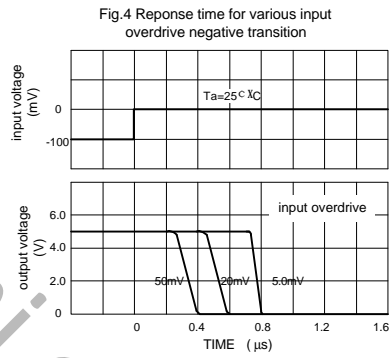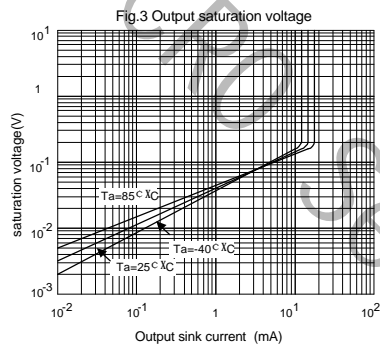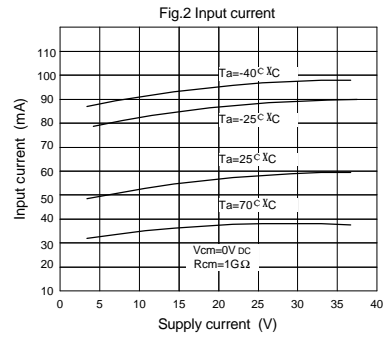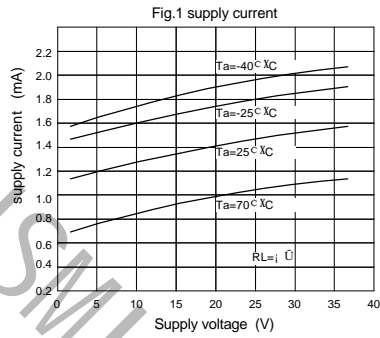

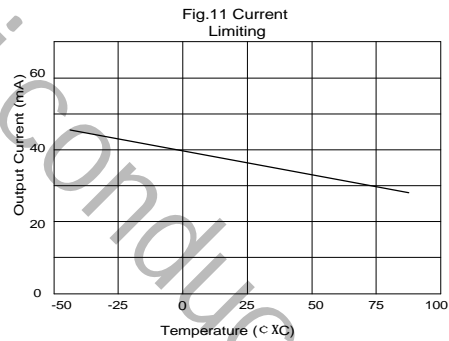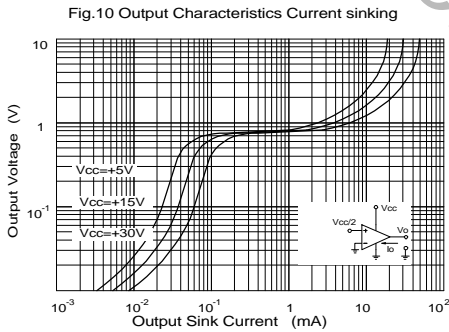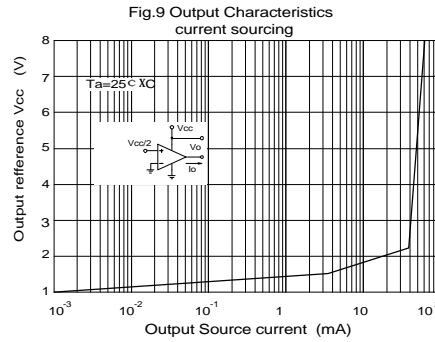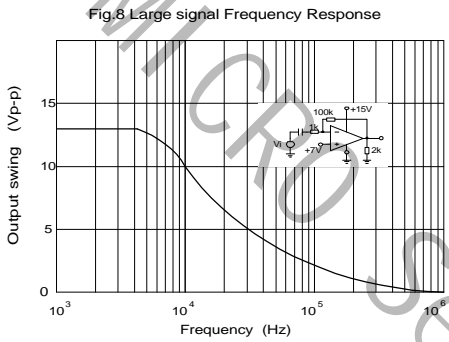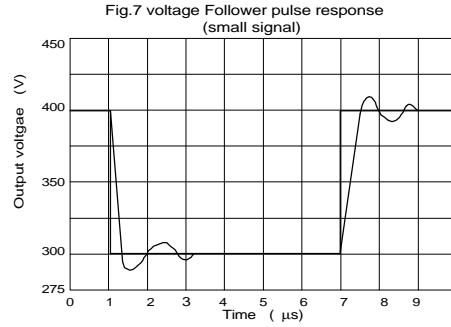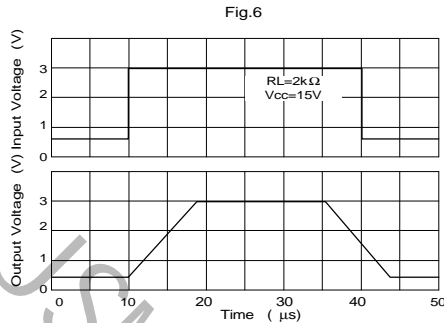

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Analog Comparators](#) category:

Click to view products by [JSMSEMI](#) manufacturer:

Other Similar products are found below :

[SC2903VDR2G](#) [LM2901SNG](#) [LM339SNG](#) [5962-8757203IA](#) [NTE911](#) [LM339EDR2G](#) [NTE922](#) [UPC311G2-E1-A](#) [UPC311G2-E2-A](#)
[UPC272G2-E1-A](#) [UPC277G2-E2-A](#) [UPC177G2-E2-A](#) [UPC271G2-E2-A](#) [TLV1811DBVR](#) [HT393VRMZ](#) [LM2903YD](#) [NCV2200SN1T1G](#)
[LM2903A-SR](#) [LM2903A-VR](#) [HT393ARZ](#) [LM2903](#) [LM2904](#) [LM393D](#) [LM393](#) [LMV331SN3T1G](#) [LMV331ILT](#) [LMV331W5](#)
[LMV331IDBVR](#) [LMV331M5X](#) [TPV331S5](#) [LM339A-SR](#) [GS8748-SR](#) [LM311MM/TR](#) [LM211MM/TR](#) [HT339ARQZ](#) [LM393DR-HXY](#)
[LM2903XK-Q1](#) [RS393XK-Q1](#) [LM2903XM](#) [RS339XQ](#) [LM331CXF](#) [RS393XM](#) [LM2901XP](#) [LM2901DR-JSM](#) [LM239DR-JSM](#) [LM339](#)
[LR2903D](#) [TS391IL](#) [LM331A-S5TR](#) [GSV331R-TR](#)