


DESCRIPTION :

The LM393 consists of two independent voltage comparators with an offset voltage specification as low as 2.0mV max. for two comparators which were designed specifically to operate from a single power supply over a wide range of voltages. Operate from split power supplies is also possible, and the low power supply current drain is independent of the magnitude of the power supply voltage. These comparators also have a unique characteristic in that the input common-mode voltage range includes ground, even though operated from a single power supply voltage.

Outline Drawing

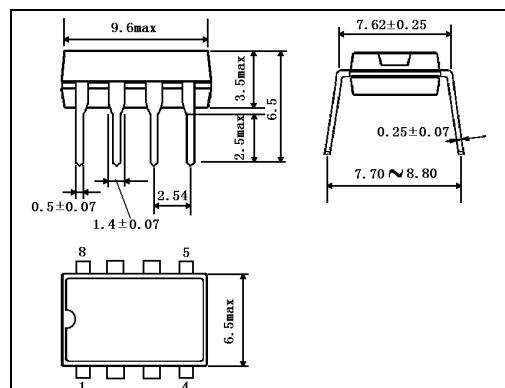


DIP8


FEATURE :

- Wide supply voltage range :single supply operation :2V to 32V dual supply operation : $\pm 1V$ to $\pm 16V$
- Very low supply current drain (0.8mA) independent of supply voltage(2.0mW/comparator at 5.0 VDC)
- Low input biasing current : 25nA
- Low input offset current <5.0nA; Low input offset voltage : 5.0mV
- Input common-mode voltage range includes ground
- Differential input voltage range equal to the power supply voltage
- Output voltage compatible with TTL,DTL,ECL,MOS and CMOS logic systems.

BLOCK DIAGRAM

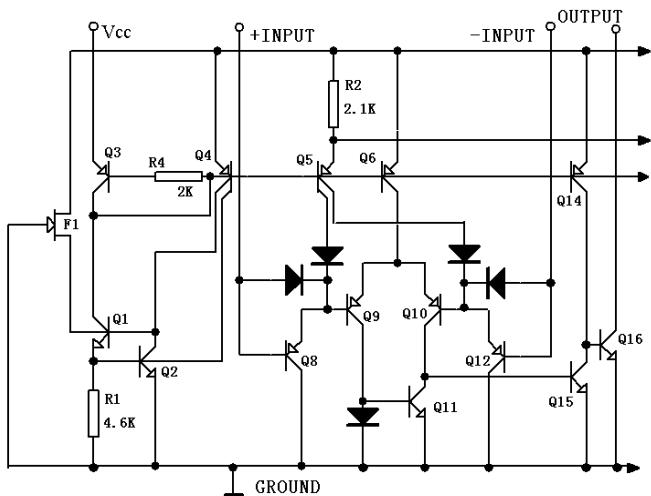

PIN CONFIGURATION

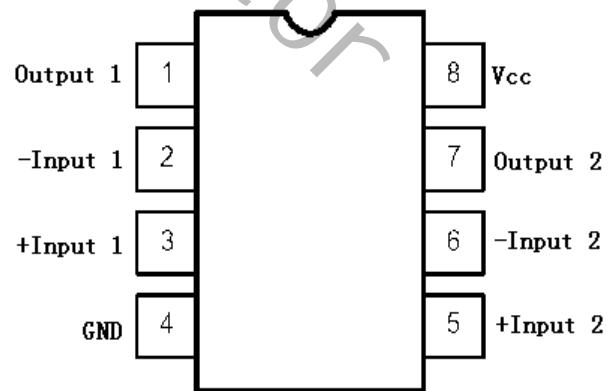

PIN DESCRIPTIONS





No	Description	Symbol	No	Description	Symbol
1	Output 1	OUT1	5	+Input2	IN2 (+)
2	-Input1	IN1 (-)	6	-Input2	IN2 (-)
3	+Input1	IN1 (+)	7	Output 2	OUT1
4	Ground	GND	8	Supply Voltage	Vcc

ABSOLUTE MAXIMUM RATINGS

Characteristics	Symbol	Value		Unit
		Min	Max	
Supply Voltage	Vcc		±16	V
			32	
Differential Input Voltage	VIDR		32	V
Input common-mode voltage	VICR	-0.3	32	V
Output short-circuit to ground	IOG		20	mA
Input Current	IIN		50	mA
Maximum junction temperature	Tj		125	
Power Dissipation	PD		570	mW
Operating Temperature Range	Tamb	0	70	
Storage Temperature Range	Tstg	-65	150	

ELECTRICAL CHARACTERISTICS (Unless otherwise specified : Vcc=5V , Tamb=25)

Characteristics	Test conditions	Symbol	Mi	Typ.	Max	Unit
Input Offset Voltage	0 ≤ Ta ≤ 70	VIO		±1.0	±7.0	mV
					±9.0	
Input Offset Current	0 ≤ Ta ≤ 70	IIO		±5.0	±50	nA
					±150	
Input Bias Current	0 ≤ Ta ≤ 70	IB		25	250	nA
					400	
Input Common-mode Voltage Range	0 ≤ Ta ≤ 70	VICR	0		Vcc-1.5	V
			0		Vcc-2.0	
Supply Current	RL=∞ dual comparator	Icc		0.4	1.0	mA
	RL=∞ , dual comparator Vcc=32V				2.5	
Voltage Gain	RL ≥ 15KΩ , Vcc=15V	Gv	50	200		V/mV
Large Signal Response Time	VIN=TTL Logic Swing , VREF=1.4V , VRL=5.0V , RL=5.1KΩ	tRES		300		ns
Response Time	VRL=5.0V , RL=5.1KΩ	tRES		1.3		ns
Input Differential Voltage		VID			Vcc	V
Output Sink Current	VIN(-) ≥ 1.0V , VIN(+) = 0V , Vo ≤ 1.5V	ISINK	6.0	16		mA
output saturation voltage	VIN(-) ≥ 1.0V , VIN(+) = 0V , ISINK ≤ 4.0mA	VSAT		150	400	mV
	VIN(-) ≥ 1.0V , VIN(+) = 0V , ISINK ≤ 4.0mA 0 ≤ Ta ≤ 70				700	
Output Leakage Current	VIN(+) ≥ 1.0V , VIN(-) = 0V , Vo = 5.0V	IOL		0.1		nA
	VIN(+) ≥ 1.0V , VIN(-) = 0V , Vo = 30V 0 ≤ Ta ≤ 70				1000	

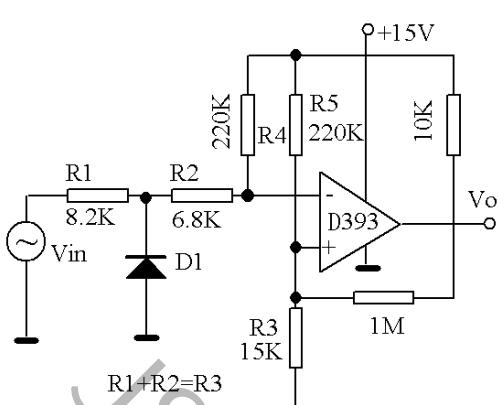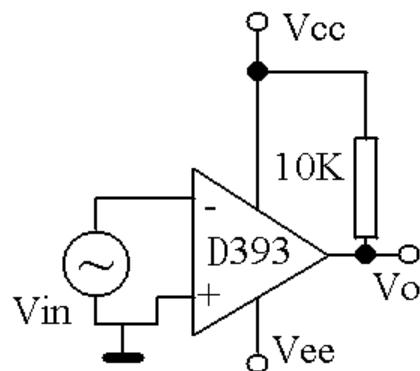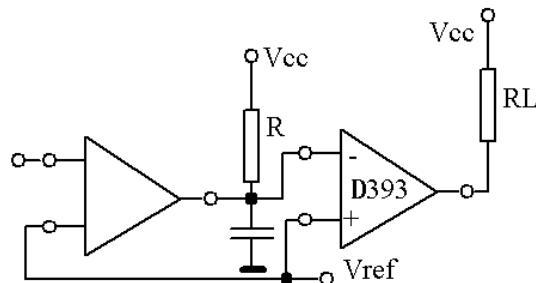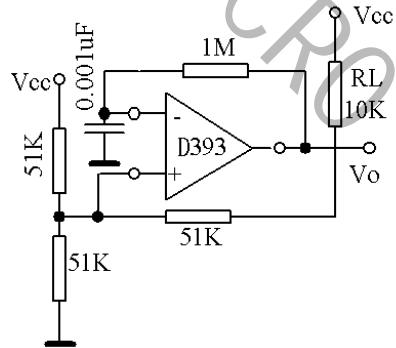APPLICATION CIRCUIT

Applied single power Supply

Applied split power supplies


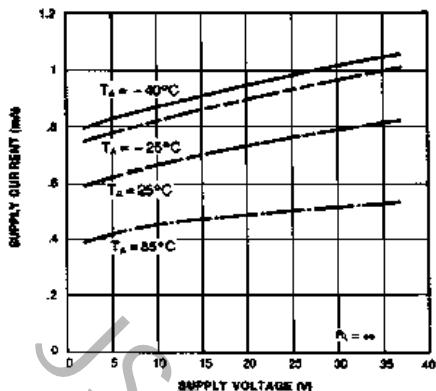
TYPICAL CHARACTERISTICS CURVES:


Figure 1. Supply Current vs Supply Voltage

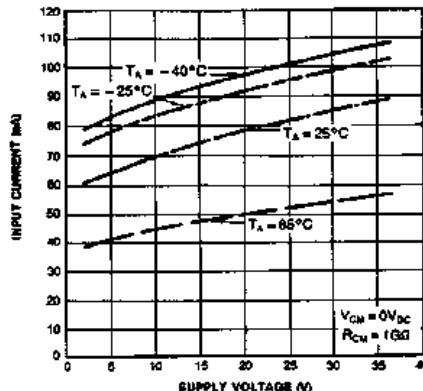


Figure 2. Input Current vs Supply Voltage

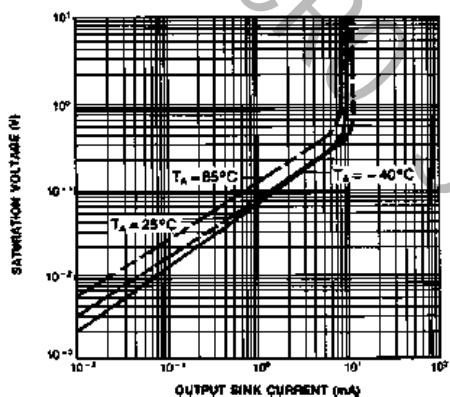


Figure 3. Output Saturation Voltage vs Sink Current

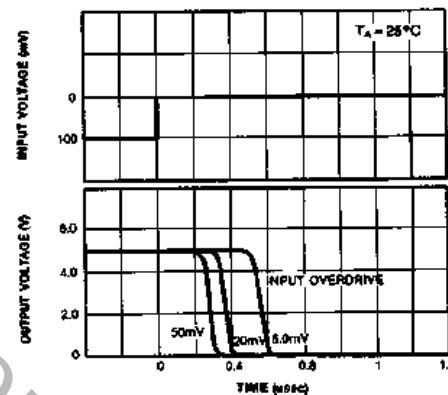


Figure 4. Response Time for Various Input Overdrive-Negative Transition


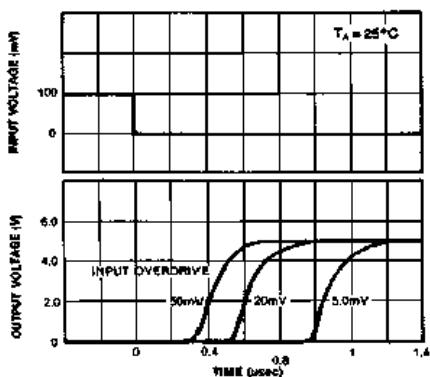


Figure 5. Response Time for Various Input Overdrive-Positive Transition

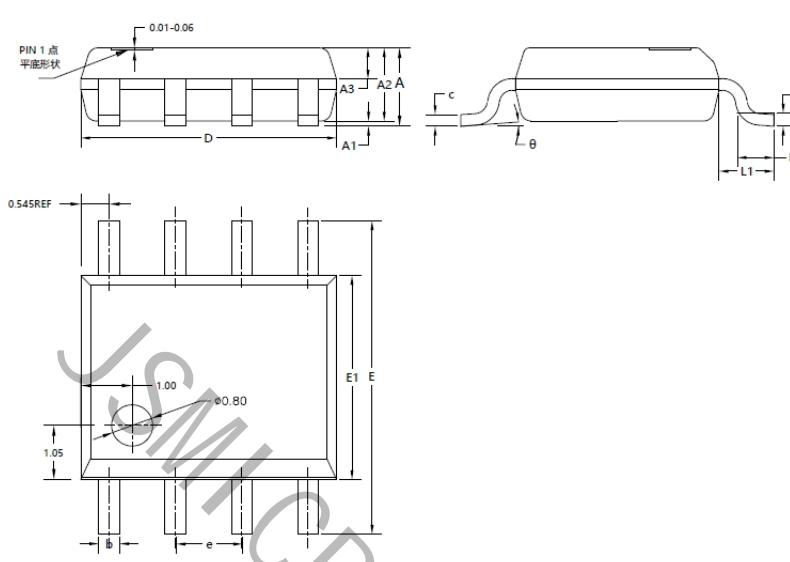

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	1.55	1.65	1.75
A1	0.10	0.20	0.25
A2	1.35	1.45	1.55
A3	0.60	0.70	0.80
b	0.30	0.40	0.50
c	0.17	0.20	0.25
D	4.80	4.90	5.00
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.27BSC		
L	0.50	0.60	0.70
L1	1.05REF		
θ	0°	4°	8°

SOP8

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Analog Comparators category:](#)

Click to view products by [JSMSEMI manufacturer:](#)

Other Similar products are found below :

[SC2903VDR2G](#) [LM2901SNG](#) [LM339SNG](#) [5962-8757203IA](#) [NTE911](#) [LM339EDR2G](#) [NTE922](#) [UPC311G2-E1-A](#) [UPC311G2-E2-A](#)
[UPC272G2-E1-A](#) [UPC277G2-E2-A](#) [UPC177G2-E2-A](#) [UPC271G2-E2-A](#) [TLV1811DBVR](#) [HT393VRMZ](#) [LM2903YD](#) [NCV2200SN1T1G](#)
[LM2903A-SR](#) [LM2903A-VR](#) [HT393ARZ](#) [LM2903](#) [LM2904](#) [LM393D](#) [LM393](#) [LMV331SN3T1G](#) [LMV331ILT](#) [LMV331W5](#)
[LMV331IDBVR](#) [LMV331M5X](#) [TPV331S5](#) [LM339A-SR](#) [GS8748-SR](#) [LM311MM/TR](#) [LM211MM/TR](#) [HT339ARQZ](#) [LM393DR-HXY](#)
[LM2903XK-Q1](#) [RS393XK-Q1](#) [LM2903XM](#) [RS339XQ](#) [LM331CXF](#) [RS393XM](#) [LM2901XP](#) [LM2901DR-JSM](#) [LM239DR-JSM](#) [LM339](#)
[LR2903D](#) [TS391IL](#) [LM331A-S5TR](#) [GSV331R-TR](#)