

DESCRIPTION

- Collector–Emitter Breakdown Voltage—
: $V_{(BR)CEO} = -60\text{ V}$
- DC Current Gain—
: $h_{FE} = 750(\text{Min}) @ I_C = -1.5\text{ A}$
- Complement to Type MJE800


APPLICATIONS

- Designed for general-purpose amplifier and low-speed switching applications

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-60	V
V_{CEO}	Collector-Emitter Voltage	-60	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-4	A
I_B	Base Current	-0.1	A
P_C	Collector Power Dissipation $T_C=25^\circ\text{C}$	40	W
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

THERMAL CHARACTERISTICS


SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	3.13	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS
 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=-50\text{mA}; I_B=0$	-60		V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C=-1.5\text{A}; I_B=-30\text{mA}$		-2.5	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C=-4\text{A}; I_B=-40\text{mA}$		-3.0	V
$V_{BE(on)-1}$	Base-Emitter On Voltage	$I_C=-1.5\text{A}; V_{CE}=-3\text{V}$		-2.5	V
$V_{BE(on)-2}$	Base-Emitter On Voltage	$I_C=-4\text{A}; V_{CE}=-3\text{V}$		-3.0	V
I_{CEO}	Collector Cutoff Current	$V_{CE}=-60\text{V}; I_B=0$		-0.1	mA
I_{CBO}	Collector Cutoff Current	$V_{CB}=-60\text{V}; I_E=0$ $V_{CB}=-60\text{V}; I_E=0; T_C=100^{\circ}\text{C}$		-0.1 -0.5	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=-5\text{V}; I_C=0$		-2.0	mA
h_{FE-1}	DC Current Gain	$I_C=-1.5\text{A}; V_{CE}=-3\text{V}$	750		
h_{FE-2}	DC Current Gain	$I_C=-4\text{A}; V_{CE}=-3\text{V}$	100		

● TO-126 外形尺寸图:

单位: mm (±0.1)

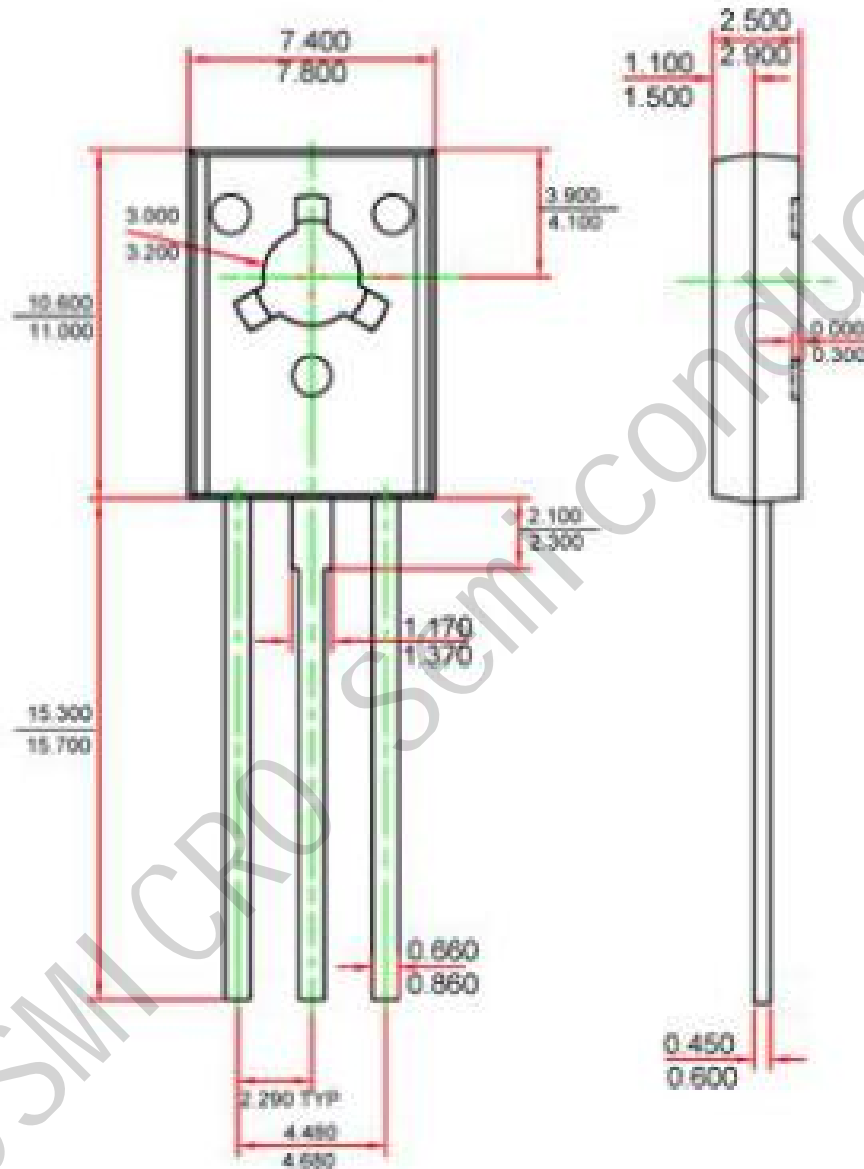

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [JSMSEMI manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N4403](#) [2N6728](#)
[2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-](#)
[TL-E](#) [MCH4021-TL-E](#) [Jantx2N5416](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANTX2N3735](#) [JANSR2N2222AUB](#)
[CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#)
[MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#)