

VOLTAGE CONTROLLED TEMPERATURE COMPENSATED CRYSTAL OSCILLATOR



5.0 X 3.2 X 1.5mm

ASVTX-09



FEATURES:

- Compact and low in height.
- Low current consumption.
- Suitable for high-density SMT.
- Vc function corresponds to PLL circuits.
- IR reflow possible.

APPLICATIONS:

- Cellular and cordless phones.
- Standard OSC for exact equipment.
- Mobile communication equipment.
- Portable radio equipment and music player.

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N	ASVTX-09
Frequency	10.000MHz to 44.545MHz
Standard Frequencies	12.8MHz, 13.0MHz, 14.4MHz, 15.36MHz, 16.000MHz, 16.384MHz, 16.8MHz, 19.2MHz, 19.440MHz, 19.680MHz, 19.8MHz, 26.0MHz
Operating Temperature	- 30° C to + 75° C (See Table 1 for options)
Storage Temperature	- 40° C to + 85° C
Freq. Stability vs. +25°C vs. Operating Temp. vs. Aging vs. Supply Voltage vs. Load	± 0.5ppm standard (See option) ±2.5ppm standard (See Table1 for options) ± 1ppm/1st year ±0.2ppm (± 5% change) ±0.2ppm (± 10% change)
Voltage Control Range (Vcc)	1.5V ±1.0V standard (See options)
Supply Voltage (Vdd)	3.0V ± 5% Standard (See options)
Supply Current	2mA max
Output Type	Clipped Sine
Output Voltage	0.8Vp-p min
Output Load	10 kohm // 10 pF
Pullability	± 8ppm min
Transfer Function	Positive
Phase Noise	-110dBc/Hz @ 100KHz offset; -130dBc/Hz @ 1KHz offset

OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

ASVTX - 09 - □ - Frequency - □ - □□□ - □

	Supply Voltage (Vdd)	Control Voltage (Vcc)	Frequency Stability vs +25° C	
A	2.5V±5%	1.25V±1.0V	Blank*	±0.5ppm
Blank*	3.0V±5%	1.5V±1.0	J	±1.5ppm
B	3.3V±5%	1.65V± 1.5V		
C	5.0V±5%	2.5V± 2.0V		

*3.0V±5% : Standard

Packaging	
Blank	Bulk
T	Tape and Reel

(1,000 or 2,000pcs/reel)

Table 1: Frequency Stability vs Operating Temp.

	±1ppm	±1.5ppm	±2ppm	±2.5ppm	±3ppm	±4ppm	±5ppm
0°C-50°C	D10	D15	D20	D25	D30	D40	D50
-10°C to 60°C	E10	E15	E20	E25	E30	E40	E50
0°C to 70°C		F15	F20	F25	F30	F40	F50
-20°C to +75°C			G20	G25	G30	G40	G50
-30°C to 75°C				STD	H30	H40	H50
-40°C to 85°C					I30	I40	I50



VOLTAGE CONTROLLED TEMPERATURE COMPENSATED CRYSTAL OSCILLATOR




5.0 X 3.2 X 1.5mm


ASVTX-09



OUTLINE DRAWING:

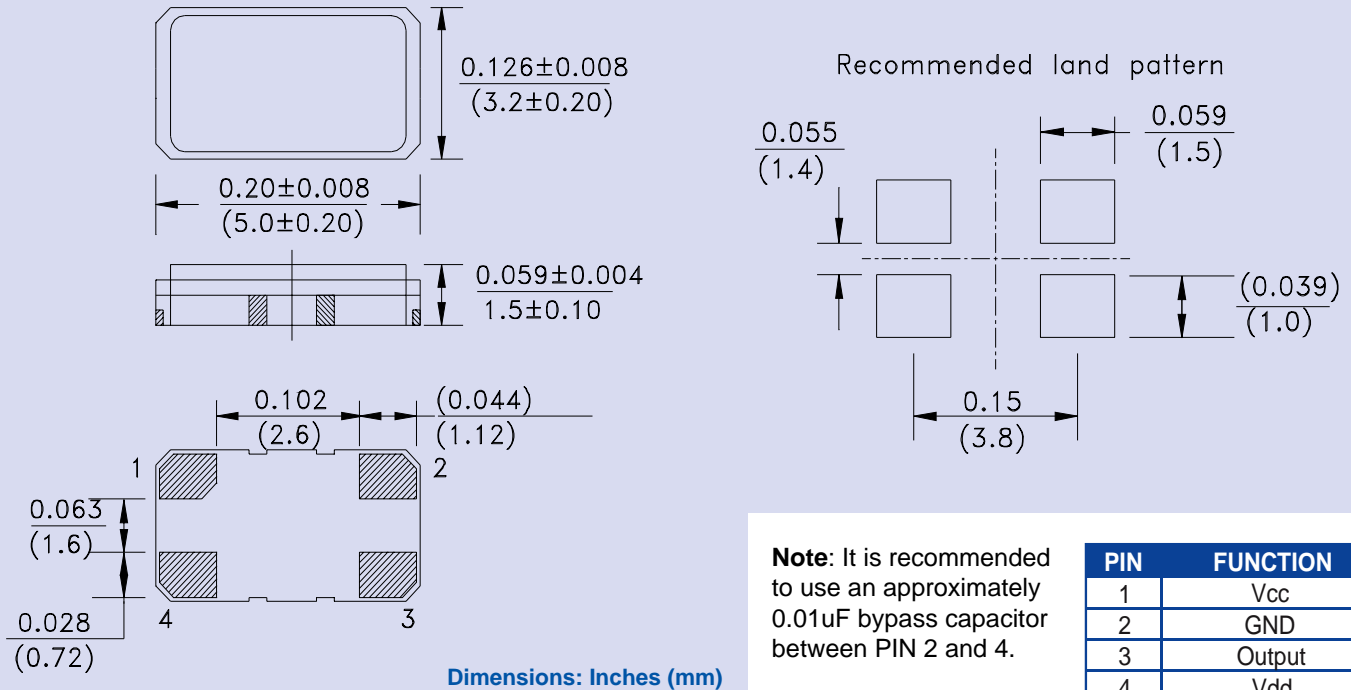

TAPE & REEL:

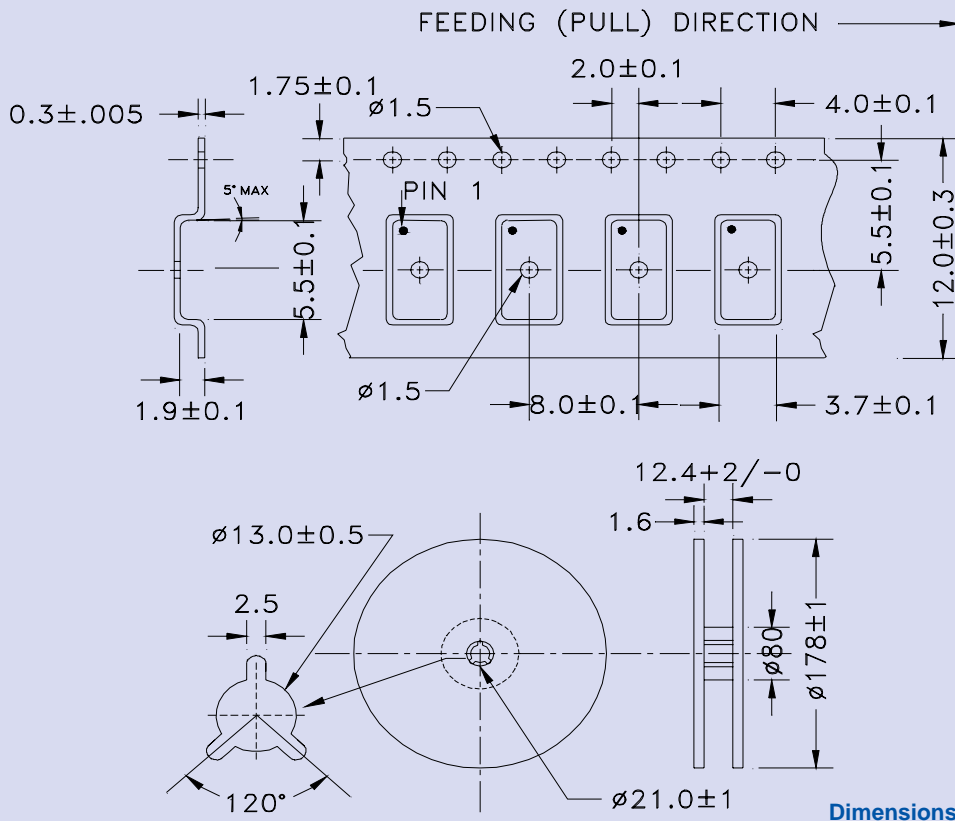

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TCVCXO Oscillators](#) category:

Click to view products by [ABRACON](#) manufacturer:

Other Similar products are found below :

[FOX923CH-19.20M](#) [TG-5006CG-12H 26.0000M3](#) [TG-5035CG-13N 19.2000M3](#) [SIT5000ACC8E-33VQ-19.200000X](#) [TG5032SGN](#)
[40.0000M-CBGHNAB](#) [LFTVXO022175Bulk](#) [KT7050A10000KAW33TAD](#) [MAOC-009266-PKG003](#) [ASVTX-09-19.200MHZ-T](#)
[SiT5000AICGE-33E0-25.000000X](#) [LFTVXO075674CUTT](#) [ASVTX-12-C-19.200MHz-I15-T](#) [LFTVXO075803Cutt](#) [LFTVXO076348CUTT](#)
[LFTVXO075802Cutt](#) [LFTVXO076344CUTT](#) [KT2016K40000DAZ18TAV](#) [KT2016K27600ZAW18TCS](#) [LFTVXO076343CUTT](#)
[LFTVXO073010Cutt](#) [LFTVXO072344CUTT](#) [LFTVXO073008Cutt](#) [LFTVXO076347CUTT](#) [LFTVXO076349CUTT](#) [LFTVXO076194CUTT](#)
[ASVTX-09-20.000MHz-T](#) [KT1612A26000ACW28TAN](#) [LFTVXO009901BULK](#) [ASGTX-C-100.000MHz-1](#) [ASGTX-C-120.000MHz-1](#)
[ASGTX-D-100.000MHz-1](#) [ASGTX-D-1.000GHz-1](#) [ASGTX-D-125.000MHz-1](#) [ASGTX-D-500.000MHz-1](#) [ASGTX-P-1.000GHz-1](#) [ASGTX-](#)
[P-1.500GHz-1](#) [ASGTX-P-500.000MHz-2](#) [ASGTX-D-1.000GHZ-2](#) [ASVTX-09-14.400MHZ-T](#) [ASVTX-09-16.000MHZ-T](#) [ASVTX-09-](#)
[16.800MHZ-T](#) [ASVTX-11-A-38.400MHz-T](#) [ASVTX-12-A-19.200MHZ-H10-T](#) [ASVTX-12-D-16.369MHz-I05-T](#) [ASVTX-12-D-19.200MHz-](#)
[I05-T](#) [ASVTX-13-C-16.369MHz-I05-T](#) [ASVTX-13-C-19.200MHz-I05-T](#) [ASVTX-13-C-26.000MHz-I05-T](#) [ASVTX-13-C-26.000MHz-I15-T](#)
[ASVTX-13-C-32.000MHz-I15-T](#)