
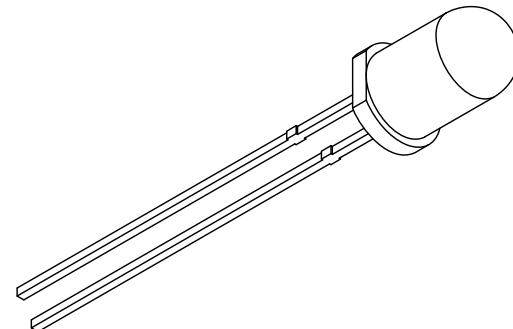



PARAMETER	MIN	TPR	MAX	UNITS	TEST COND
ELECTRO-OPTICAL CHARACTERISTICS T _d =25°C I _f =20mA					
PEAK WAVELENGTH	465	4.0	5.0	nm	
FORWARD VOLTAge	3.4	4.0	5.0	Vf	I _f =100μA
REVERSE VOLTAge	5.0		7300	15000	V _r I _r =20mA
LUMINOUS INTENSITY				mm	2x theta
VIEWING ANGLE				mm	15
EMITTED COLOR	BLUE				LENS FINISH:
LENS FINISH:	WATER CLEAR				EMITTED COLOR:
PARAMETER	TEST COND				LUMINOUS INTENSITY
LIMITS OF SAFE OPERATION AT 25°C					REVERSE VOLTAge
PEAK FORWARD CURRENT*	100		ma	ma	FORWARD VOLTAge
STANDBY CURRENT	20		ma	ma	REVERSE VOLTAge
POWER DISSIPATION	80		mw	mw	LENS FINISH:
DEVIATE FROM 25°C	-1.2		mW/°C	EMITTED COLOR:	LENS FINISH:
OPERATING TEMP.	-30 TO +80		mW/°C	BLUE	WATER CLEAR
STORAGE TEMP.	-40 TO +100		mW/°C		EMITTED COLOR:
SOLDEING TEMP.	+260		mW/°C		LENS FINISH:
2.0mm FROM BODY	3		SEC.		WATER CLEAR
* I<10μs					EMITTED COLOR:
CAROL STREAM, 16.0188-4900					
425 N GARRY AVE. CAROL STREAM, IL 60188-4900					
PHONE: +1(800)278-3666 FAX: +1(800)278-3666 WEB: WWW.LUMEX.COM					
THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.*					
PAGE:	1 OF 1		CKRD BY:	KF	
SCALE:	NTS		APRVD BY:	KF	
UNIT:	mm [INCH]				

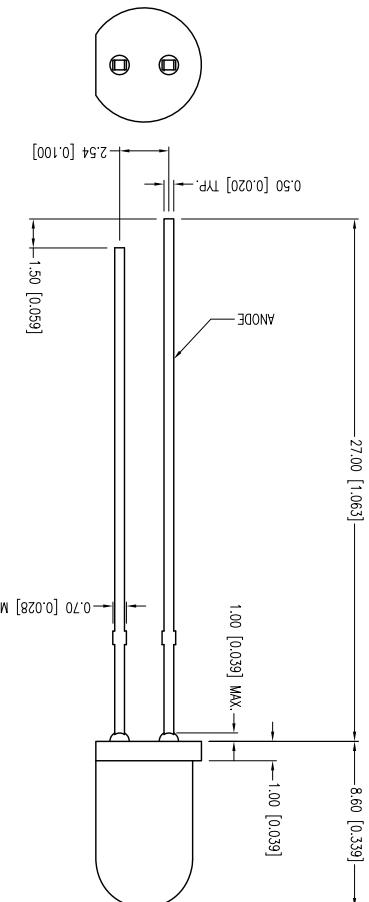

THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND SHALL NOT BE DISCLOSED OR IN PART FROM THIS DOCUMENT TO ALL THIRDPARTIES.
CONFESSIONAL INFORMATION
KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRDPARTIES.

MEMBER OF FTW PHOTONICS GROUP
Creating LED and LCD Solutions Together™

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Standard LEDs - Through Hole category:

Click to view products by Lumex manufacturer:

Other Similar products are found below :

[LTL-10254W](#) [LTL-1214A](#) [LTL-1BEDJ](#) [LTL-2231AT](#) [LTL-3251A](#) [LTL-4262N](#) [LTL-5234](#) [LTL87HTBK](#) [LTW-87HD4B](#) [7383/V7C3-BSTA-L/PR3/MS](#) [G22041431007J2C000](#) [HLMP-AG64-X10ZZ](#) [HLMP-EG1A-Z10DV](#) [HLMP-EL3B-WXKDD](#) [HLMP-HB74-UVBDD](#) [HLMP-HG65-VY0DD](#) [HLMP-HM74-34CDD](#) [HLMP-HM75-34CDD](#) [1L0532V23G0TD001](#) [NSPW500CS](#) [C4SMA-BGF-CQ34Q3C2L53GC13](#) [264-7SURTS530-A3](#) [L-C150JRCT](#) [S4SMS-BJF-CQ42QGF2](#) [S4SMS-GJF-CW12QMF2](#) [LD CQDP-1U3U-W5-1-K](#) [LNX998CKBDA](#) [LO566UHR3-70G-A3](#) [SLA560WBD2PT3](#) [LP379PPG1C0G0300001](#) [SLR-322MCT32](#) [SLR-342DUT32](#) [SLR-342MC3F](#) [SLR343BC7TT32](#) [SLR343BCTT32](#) [SLX-LX3044GD](#) [SLX-LX3044ID](#) [SLX-LX3044YD](#) [SNW-LX504SRC/4](#) [1.90690.3330000](#) [SSL-LX20483ID](#) [SSL-LX3034YD](#) [SSL-LX5093LGT-11](#) [SSL-LX5093PGC](#) [SSL-LX5093SRC/F](#) [SSL-LX5093SYT](#) [SSL-LX509E3SIT](#) [SSL-LX509FT3ID](#) [SSL-LX50FT3GD](#)