

JB10 Jumper Bars

Terminal Blocks Accessories



Features and Benefits

Facilitate & secure your jumper bar assembly process:

- Screwless mounting,
- Pre-cut poles for various circuits configurations,
- Insulated,
- Positive locking.

Main	Lechr	าเคลโ	1)ata


Main Technical Data				Mounting Instructions		
	IEC	cULus - CSA	Ех е	Tool		
	76 A	67 A				
Standard use	1000 V	600 V	630 V	Torque		
Cut extremities	800 V	300 V	Not authorized			
Cut poles	400 V	300 V	Not authorized			
and voltage	6000 V					
	IP 20	NEMA 1				
Material Specifications		erial	Polyamide			
	Flammability		V0			
	NF F 16 101		I2F2			
Ambient temperature min/max		Service IEC 60068-2-1		-67 +230 F		
	Storage		-55 +110 °C	-67 +230 F		
	Installing		-5 +40 °C	-23 +104 F		
	Standard use Cut extremities Cut poles and voltage fications	IEC	IEC cULus - CSA 76 A 67 A Standard use 1000 V 600 V Cut extremities 800 V 300 V Cut poles 400 V 300 V and voltage 6000 V F 20 NEMA 1 fications Insulating material Flammability NF F 16 101 erature min/max Service IEC 60068-2-1 Storage Standard Storage Standard Storage Standard Standard Storage Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard	IEC CULus - CSA Ex e	IEC cULus - CSA Ex e	

Ordering Details

JB10 Jumper Ba	ırs					
Description			Туре	Order Code	Pack ^(ing) pieces	Weight g (1 pce)
10 mm 0.394 in spacing	2 poles	Orange	JB10-2	1SNK 910 302 R0000	50	4.60
	3 poles	_	JB10-3	1SNK 910 303 R0000	50	7.10
	4 poles	_	JB10-4	1SNK 910 304 R0000	40	9.40
	5 poles	_	JB10-5	1SNK 910 305 R0000	30	12.00
	10 poles	_	JB10-10	1SNK 910 310 R0000	20	24.00

JB10 Accessories					
Description		Туре	Order Code	Pack ^(ing) pieces	Weight g (1 pce)
1 Circuit Separators	Dark Grey	CS	1SNK 900 101 R0000	20	0.20

JB10 Mounting Instructions

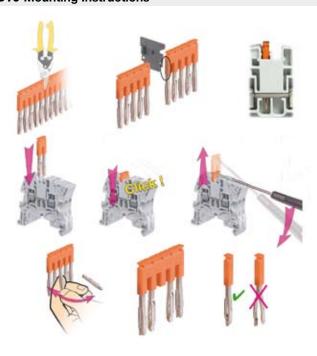

Caution:

use of cut jumper bars is not allowed in Explosive atmospheres,

- Jumper bar with cut extremities: when mounted on feed-through or ground terminal blocks: the circuit separator CS must be installed on the cut side,
- Jumper bar with cut poles: for alternated jumpering between terminal blocks.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for entrelec manufacturer:

Other Similar products are found below:

<u>023103024 023000107 ISNK505310R0000 017322627 011762822 016511417 016340320 ISNK516020R0000 023300421</u> <u>1SNK510010R0000 018731214 011870703 010500220 011511607 023300227 016049626 017666704 ISNK508411R0000 023300320</u> 016548827 023300001 012511813 017301610 011546820 010500127