


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES


- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- High Packing Density.

EQUIVALENT CIRCUIT



BIAS RESISTOR VALUES

TYPE NO.	R1(k)	R2(k)
KRC401	4.7	4.7
KRC402	10	10
KRC403	22	22
KRC404	47	47
KRC405	2.2	47
KRC406	4.7	47

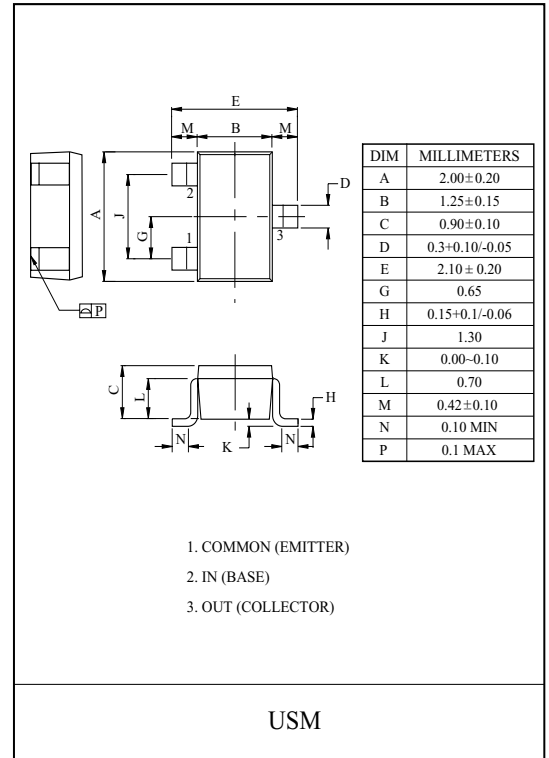


MAXIMUM RATING (Ta=25)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRC401 406	V_O	50	V
Input Voltage	KRC401	V_I	20, -10	V
	KRC402		30, -10	
	KRC403		40, -10	
	KRC404		40, -10	
	KRC405		12, -5	
	KRC406		20, -5	
Output Current	KRC401 406	I_O	100	mA
Power Dissipation		P_D	100	mW
Junction Temperature		T_j	150	
Storage Temperature Range		T_{stg}	-55 150	

MARK SPEC

TYPE	KRC401	KRC402	KRC403	KRC404	KRC405	KRC406
MARK	NA	NB	NC	ND	NE	NF

Marking

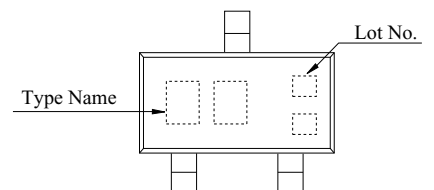

KRC401~KRC406

ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRC401 406	$I_{O(OFF)}$	$V_O=50V, V_I=0$	-	-	500	nA
DC Current Gain	KRC401	G_I	$V_O=5V, I_O=10mA$	30	55	-	
	KRC402			50	80	-	
	KRC403			70	120	-	
	KRC404			80	200	-	
	KRC405			80	200	-	
	KRC406			80	200	-	
Output Voltage	KRC401 406	$V_{O(ON)}$	$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	V
Input Voltage (ON)	KRC401	$V_{I(ON)}$	$V_O=0.2V, I_O=5mA$	-	1.5	2.0	V
	KRC402			-	1.8	2.4	
	KRC403			-	2.1	3.0	
	KRC404			-	2.8	5.0	
	KRC405			-	0.8	1.1	
	KRC406			-	0.9	1.3	
Input Voltage (OFF)	KRC401 404	$V_{I(OFF)}$	$V_O=5V, I_O=0.1mA$	1.0	1.2	-	V
	KRC405 406			0.5	0.65	-	
Transition Frequency	KRC401 406	f_T^*	$V_O=10V, I_O=5mA$	-	200	-	MHz
Input Current	KRC401	I_I	$V_I=5V$	-	-	1.8	mA
	KRC402			-	-	0.88	
	KRC403			-	-	0.36	
	KRC404			-	-	0.18	
	KRC405			-	-	3.6	
	KRC406			-	-	1.8	
Input Resistor	KRC401	R1	-	3.29	4.7	6.11	k
	KRC402			7	10	13	
	KRC403			15.4	22	28.6	
	KRC404			32.9	47	61.1	
	KRC405			1.54	2.2	2.86	
	KRC406			3.29	4.7	6.11	
Resistor Ratio	KRC401~404	R2/R1	-	0.8	1.0	1.2	
	KRC405			17	21	26	
	KRC406			8	10	12	







Note : * Characteristic of Transistor Only.

KRC401~KRC406







ELECTRICAL CHARACTERISTICS (Ta=25)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRC401	V _O =5V V _{IN} =5V R _L =1k	-	0.03	-	μs
		KRC402		-	0.05	-	
		KRC403		-	0.12	-	
		KRC404		-	0.22	-	
		KRC405		-	0.01	-	
		KRC406		-	0.03	-	
	Storage Time	KRC401		-	2.0	-	
		KRC402		-	2.0	-	
		KRC403		-	2.0	-	
		KRC404		-	2.0	-	
		KRC405		-	2.0	-	
		KRC406		-	2.0	-	
	Fall Time	KRC401		-	0.12	-	
		KRC402		-	0.36	-	
		KRC403		-	0.35	-	
		KRC404		-	0.6	-	
		KRC405		-	0.1	-	
		KRC406		-	0.19	-	







KRC401~KRC406

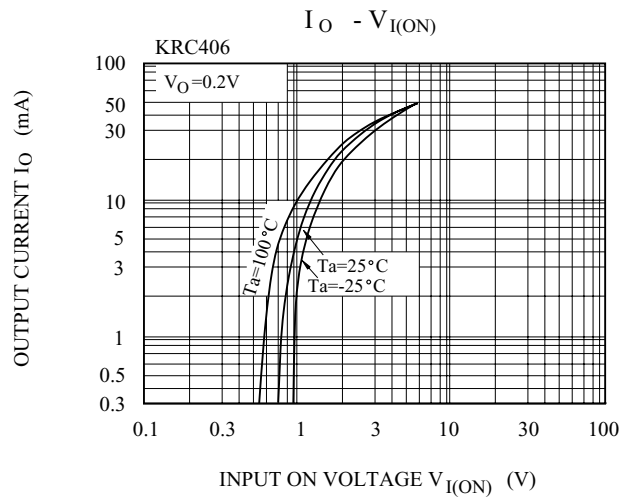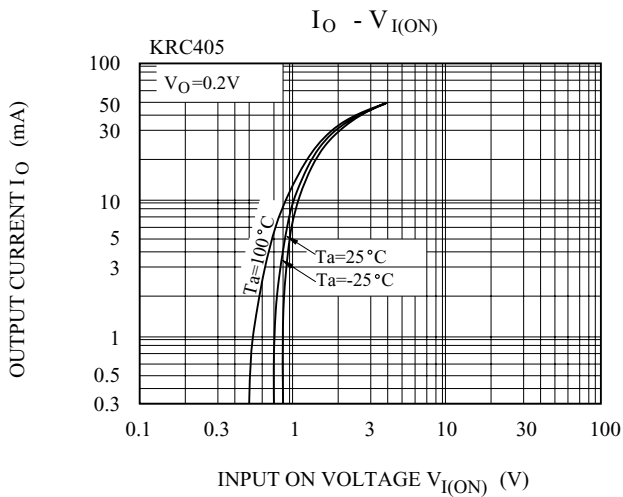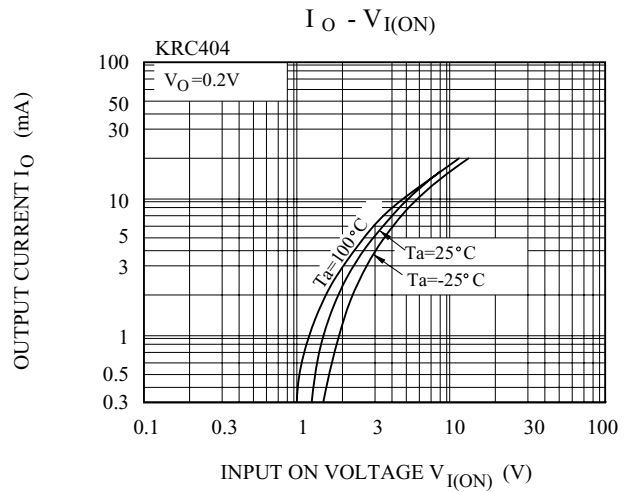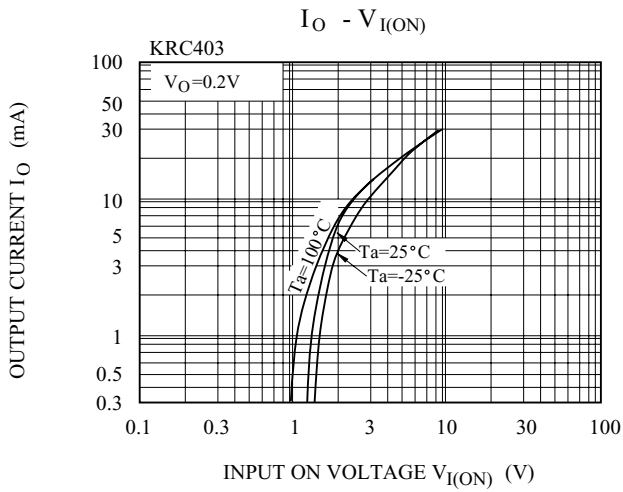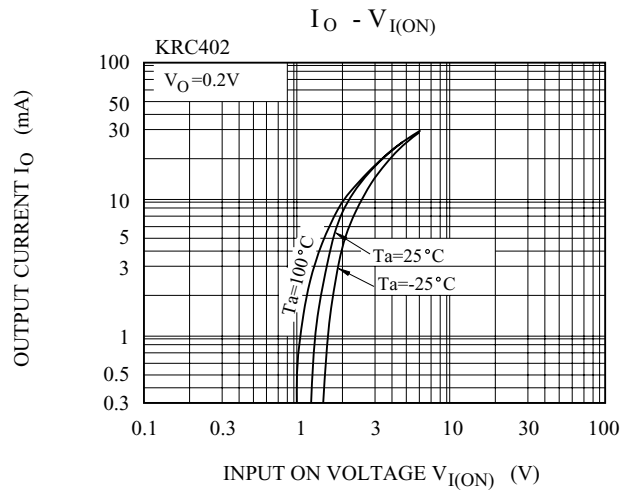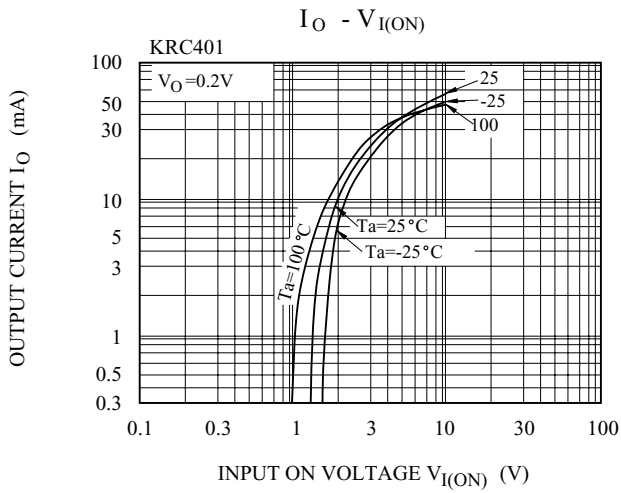

KRC401~KRC406

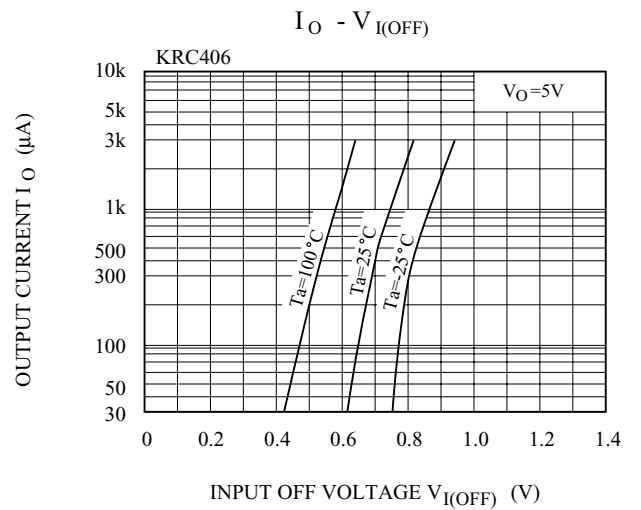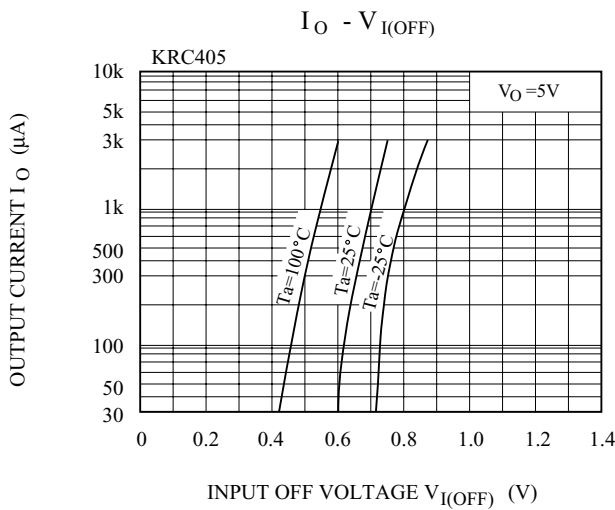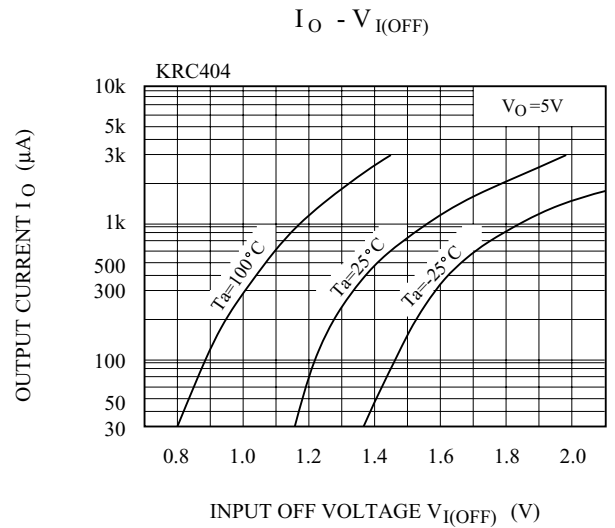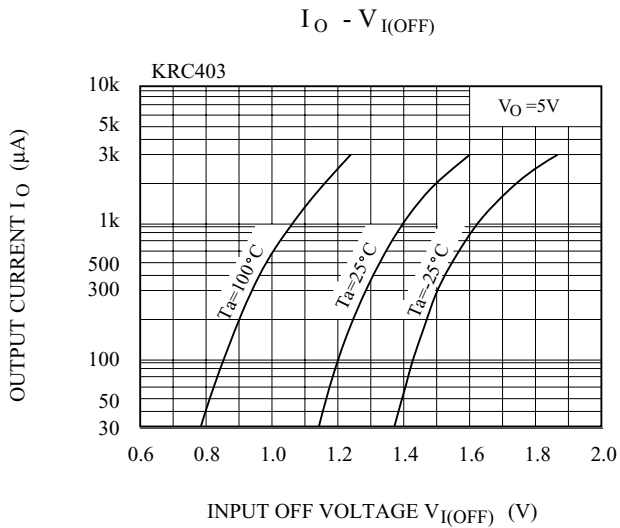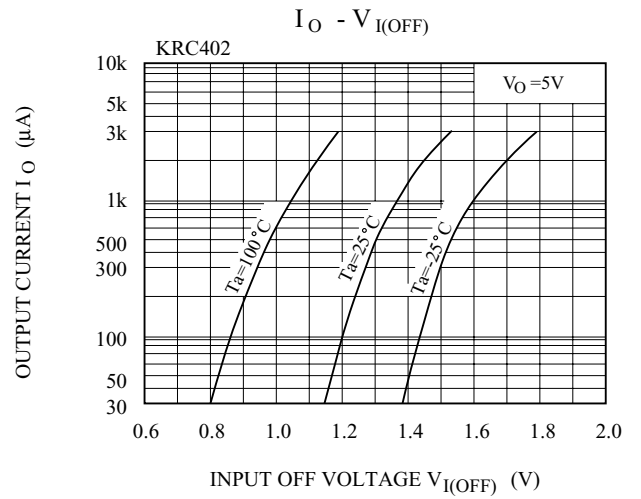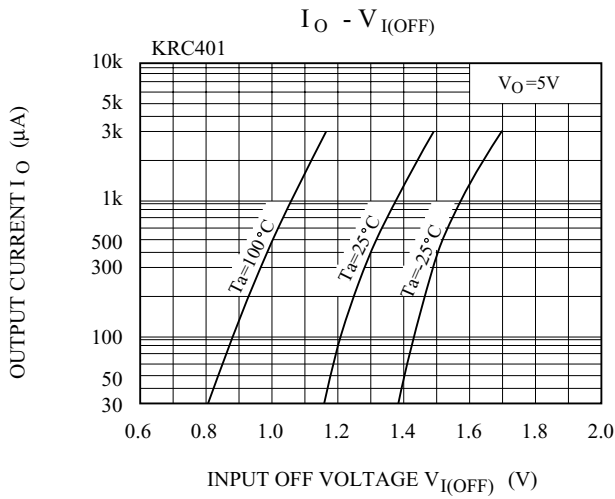

KRC401~KRC406

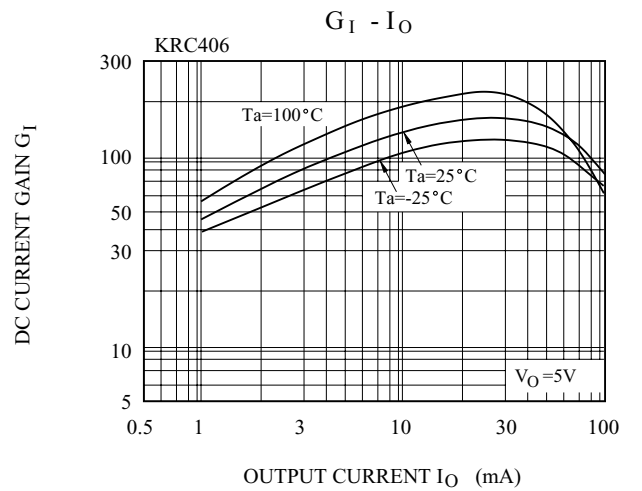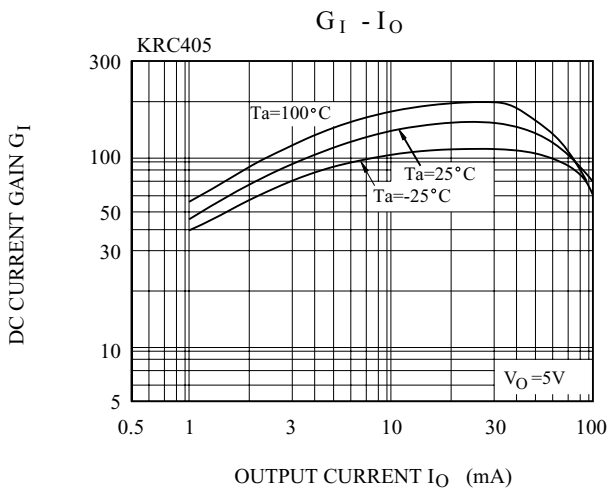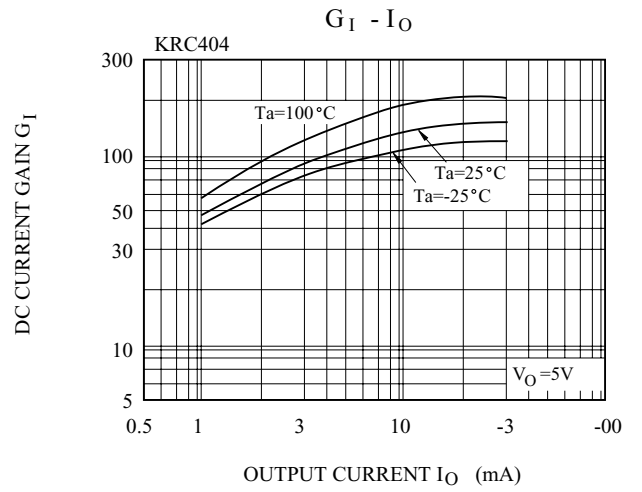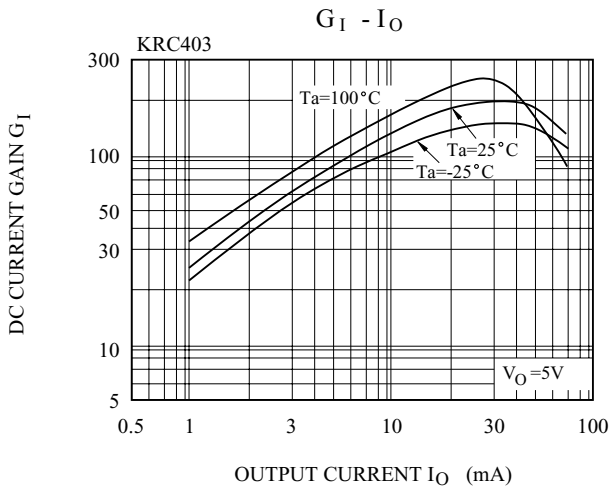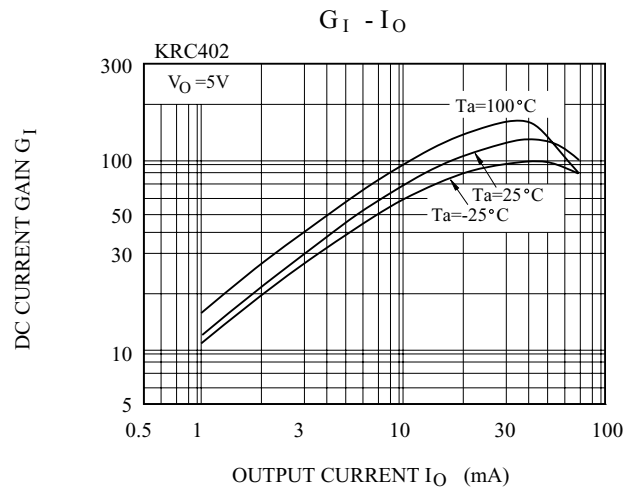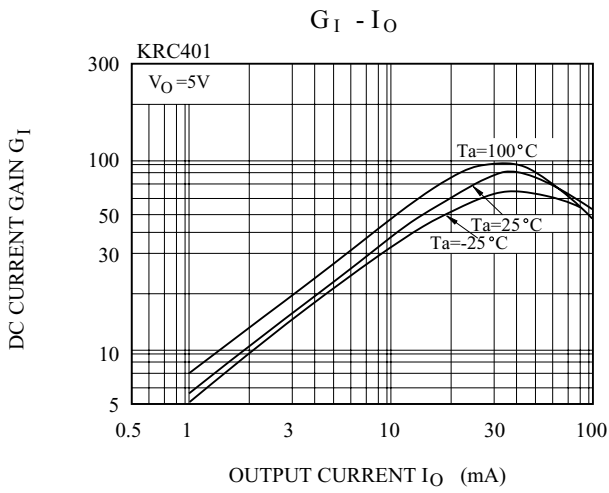

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [KEC manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [2SC4731T-AY](#) [FJPF5304DTU](#)
[2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SB1324-TD-E](#) [2SC2412KT146S](#) [2SC3902S](#) [2SC5231C8-TL-E](#) [2SD1685F](#) [CPH6501-TL-](#)
[E](#) [MCH4021-TL-E](#) [MJE340](#) [Jantx2N5416](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#)
[UMX21NTR](#) [MCH6102-TL-E](#) [NJL0302DG](#) [TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE26](#) [NTE282](#) [NTE323](#) [NTE350](#)