


GENERAL PURPOSE APPLICATION.

FEATURES

- Low Collector Saturation Voltage
: $V_{CE(sat)} = -1.0V(\text{Max.})$ at $I_C = -2A, I_B = -0.2A$.
- Collector Power Dissipation
: $P_C = 25W$ ($T_c = 25^\circ C$)
- Complementary to KTD2058.

MAXIMUM RATING ($T_a = 25^\circ C$)






CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		V_{CBO}	-60	V
Collector-Emitter Voltage		V_{CEO}	-60	V
Emitter-Base Voltage		V_{EBO}	-7	V
Collector Current		I_C	-3	A
Base Current		I_B	-0.5	A
Collector Power Dissipation	$T_a = 25^\circ C$	P_C	2	W
	$T_c = 25^\circ C$		25	
Junction Temperature		T_j	150	$^\circ C$
Storage Temperature Range		T_{stg}	-55 ~ 150	$^\circ C$

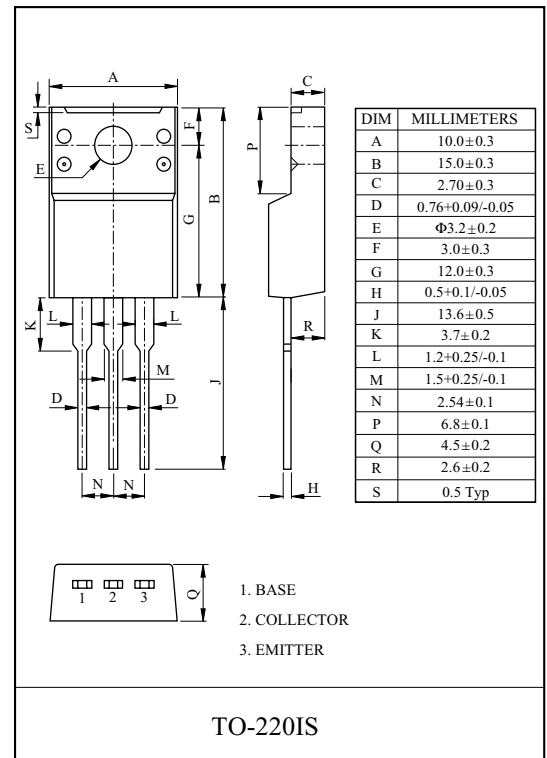

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ C$)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		I_{CBO}	$V_{CB} = -60V, I_E = 0$	-	-	-100	μA
Emitter Cut-off Current		I_{EBO}	$V_{EB} = -7V, I_C = 0$	-	-	-100	μA
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C = -50mA, I_B = 0$	-60	-	-	V
DC Current Gain	$h_{FE(1)}$ (Note)		$V_{CE} = -5V, I_C = -0.5A$	60	-	200	
	$h_{FE(2)}$		$V_{CE} = -5V, I_C = -3A$	20	-	-	
Collector Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C = -2A, I_B = -0.2A$	-	-0.25	-1.0	V
Base-Emitter Voltage		V_{BE}	$V_{CE} = -5V, I_C = -0.5A$	-	-0.7	-1.0	V
Transition Frequency		f_T	$V_{CE} = -5V, I_C = -0.5A$	-	9	-	MHz
Collector Output Capacitance		C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$	-	150	-	pF
Switching Time	Turn-on Time	t_{on}	<p>$I_{B1} = I_{B2} = 0.2A$ DUTY CYCLE $\leq 1\%$</p>	-	0.4	-	μS
	Storage Time	t_{stg}		-	1.7	-	
	Fall Time	t_f		-	0.5	-	

Note : $h_{FE(1)}$ Classification O:60 ~ 120, Y:100 ~ 200

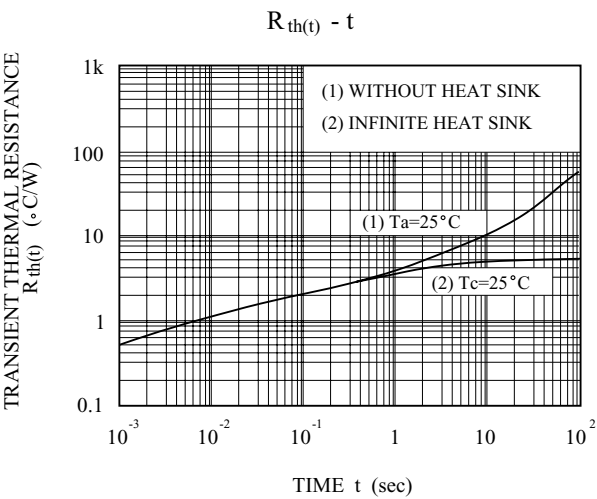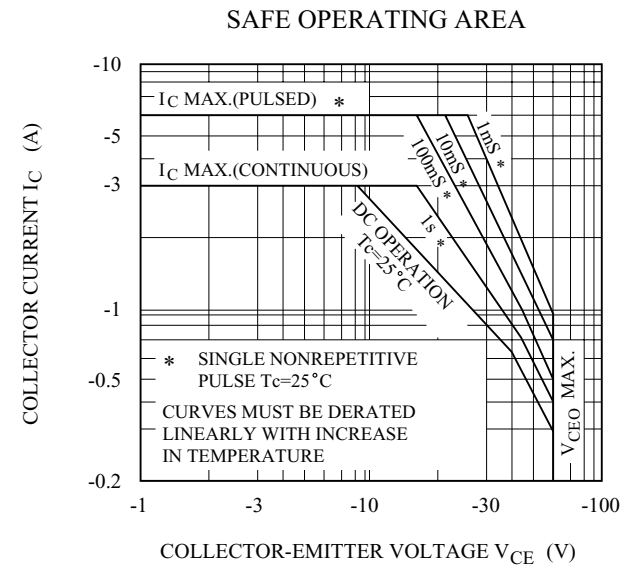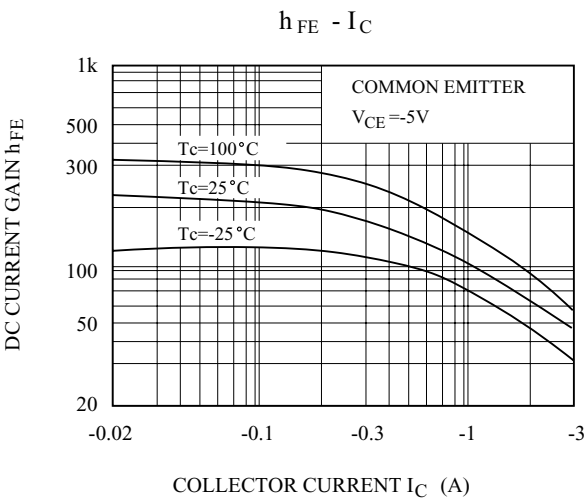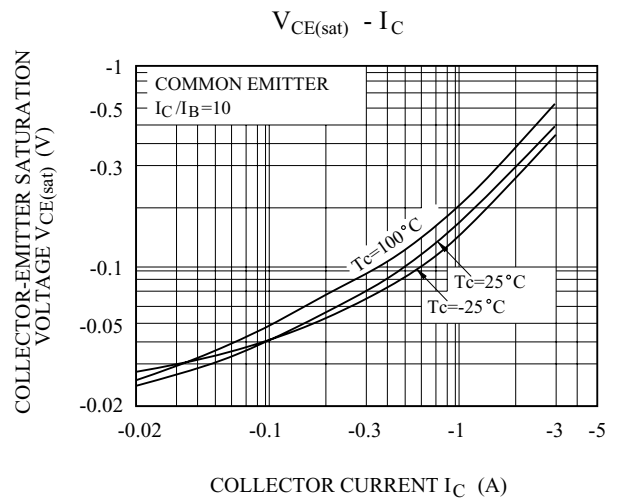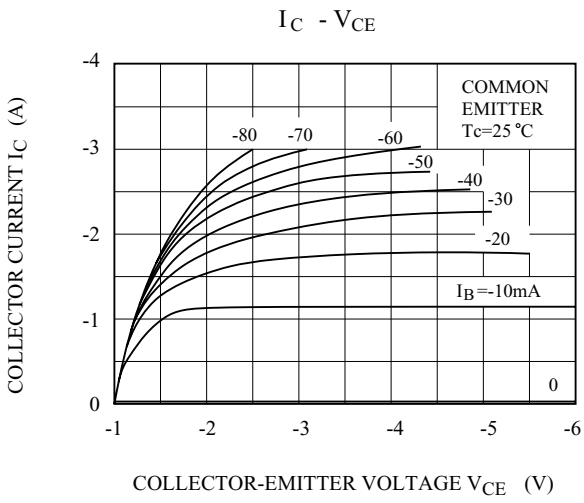

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [KEC manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [C4460](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC2412KT146S](#) [2SD1816S-TL-E](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)
[MJE340](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[NJL0302DG](#) [2N3583](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE13](#) [NTE26](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#)