


GENERAL PURPOSE APPLICATION.  
DPAK FOR SURFACE MOUNT APPLICATIONS.

### FEATURES

- Low Collector Saturation Voltage  
:  $V_{CE(sat)}=1.0V(\text{Max.})$  at  $I_C=2A, I_B=0.2A$ .
- Straight Lead (IPAK, "L" Suffix)
- Complementary to KTA1040D/L.

### MAXIMUM RATING (Ta=25 )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	60	V
Collector-Emitter Voltage	$V_{CEO}$	60	V
Emitter-Base Voltage	$V_{EBO}$	7	V
Collector Current	$I_C$	3	A
Base Current	$I_B$	0.5	A
Collector Power Dissipation	$P_C$	Ta=25	1.0
		Tc=25	20
Junction Temperature	$T_j$	150	
Storage Temperature Range	$T_{stg}$	-55 150	





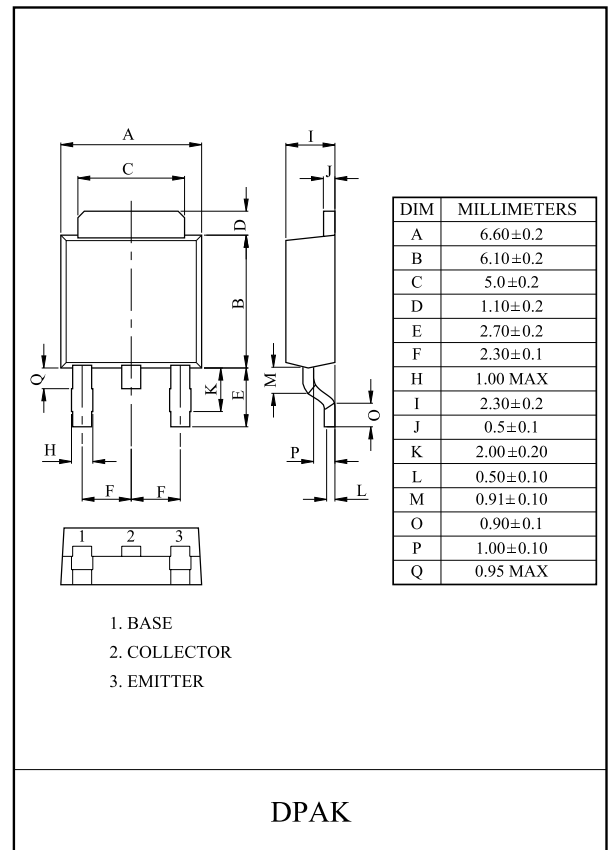


### ELECTRICAL CHARACTERISTICS (Ta=25 )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=60V, I_E=0$	-	-	100	$\mu A$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=7V, I_C=0$	-	-	100	$\mu A$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=50mA, I_B=0$	60	-	-	V
DC Current Gain	$h_{FE}$ (Note)	$V_{CE}=5V, I_C=0.5A$	100	-	300	-
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=2A, I_B=0.2A$	-	0.5	1.0	V
Base-Emitter Voltage	$V_{BE}$	$V_{CE}=5V, I_C=0.5A$	-	0.7	1.0	V
Transition Frequency	$f_T$	$V_{CE}=5V, I_C=0.5A$	-	30	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=10V, I_E=0, f=1MHz$	-	35	-	pF
Switching Time	Turn-on Time	$t_{on}$	-	0.65	-	$\mu s$
	Storage Time	$t_{stg}$	-	1.3	-	
	Fall Time	$t_f$	-	0.65	-	

Note :  $h_{FE}$  Classification Y:100~200, GR:150~300.

# KTC2020D

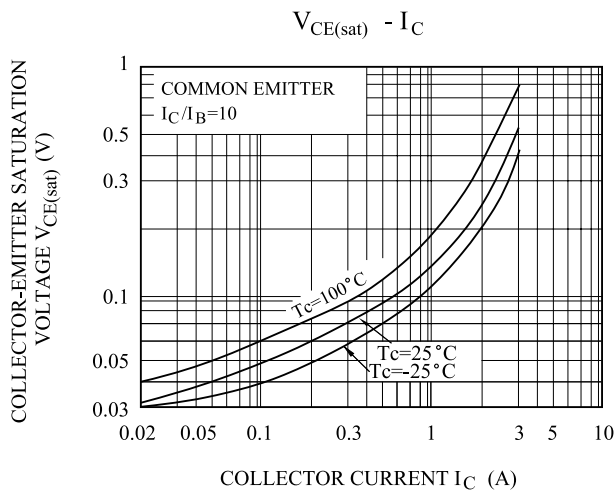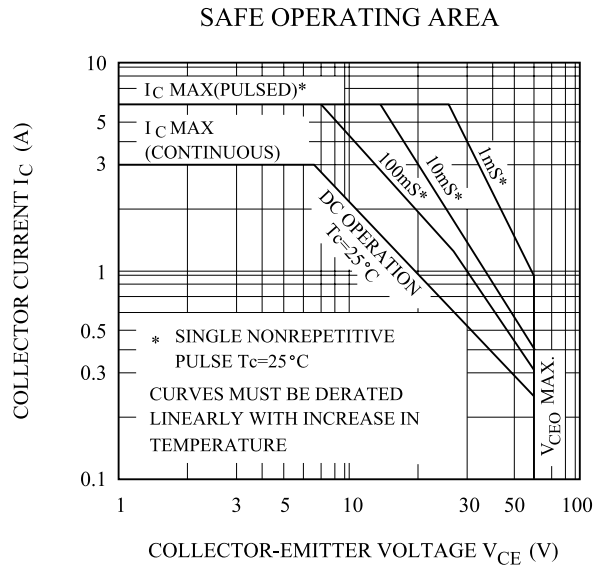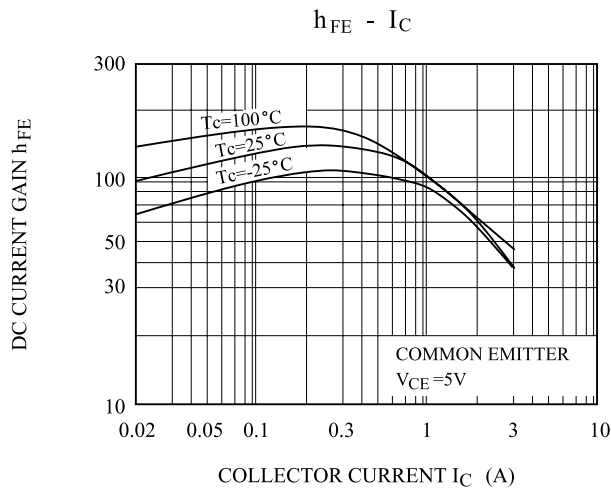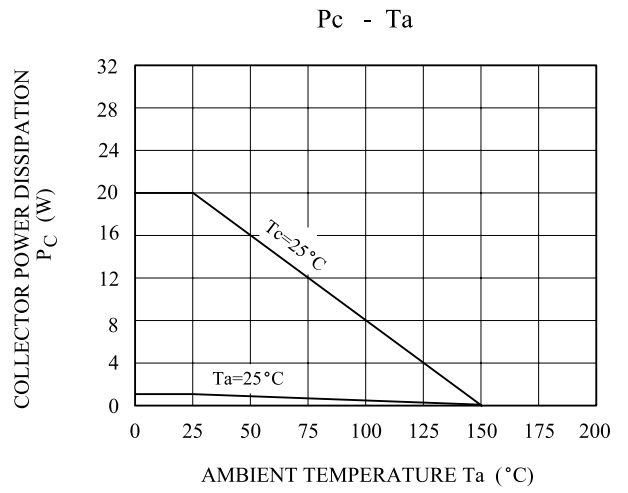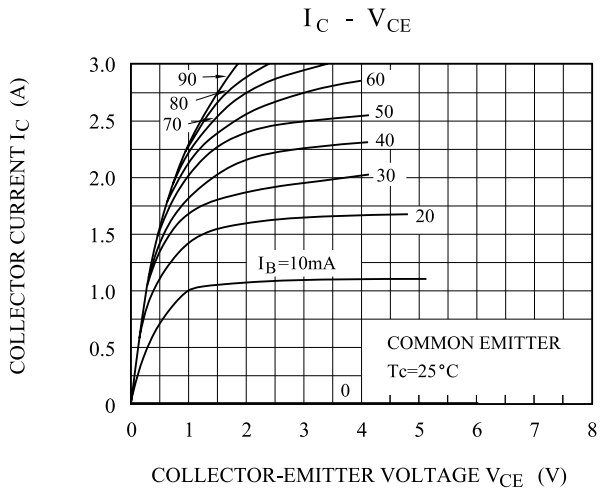

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [KEC manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)