


## TECHNICAL SPECIFICATIONS SN-Series

<b>Material:</b>	UL Recognised Plastic Material
<b>Operating Temperature:</b>	-55°C to +110°C
<b>Cable Entry:</b>	Top
<b>Thumbscrews:</b>	UNC 4-40
<b>Cable O.D:</b>	Up to 11,5mm
<b>Colour:</b>	Black or Light Grey

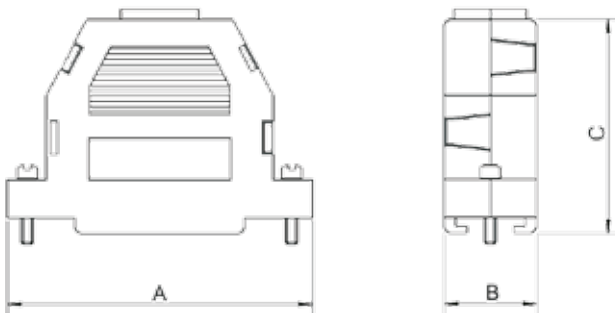

Size	A	B	C
9-way	30,5	15,5	39,2
15-way	40,1	15,5	39,6
25-way	53,6	16,0	43,0

## Ordering information:

Size:	P/N - Kitted:	Product Code BLACK:
9-way	2360-0101-01	MHCCOV 9-SN-BK
15-way	2360-0101-02	MHCCOV15-SN-BK
25-way	2360-0101-03	MHCCOV25-SN-BK

Size:	P/N - Kitted:	Product Code LIGHT GREY
9-way	2360-0101-11	MHCCOV 9-SN-LG
15-way	2360-0101-12	MHCCOV15-SN-LG
25-way	2360-0101-13	MHCCOV25-SN-LG

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [mh connectors](#) manufacturer:*

Other Similar products are found below :

[MHDCMR37-ULP](#) [C88E310000](#) [MHD45ZK25-DM25P-K](#) [MHCCOV-25SC-BK](#) [MHDTZK15-RA-K](#) [DSSKP15L-DB15S-K](#) [DSSKM15L-DB15S-K](#) [MHDM25-DM25P-K](#) [MHRJ126P4CR](#) [BNC4MML1MRG58](#) [RJ45SRB-RET-O](#) [MHDPPK25-Y-K](#) [MHCCOV-9ME](#) [BNCL2.0MRG58](#) [MHDD15-F-T-B-M](#) [MHDD9-M-T-B-M](#) [MHDM15-K](#) [MHDTZK25-K](#) [MHRJ126P6CR](#) [MHDM9-DB9P-K](#) [RJ45SRB-LGREY](#) [MHED-DS25S](#) [BNCL1.0MRG58](#) [MHDM25-K](#) [RG58SRB-G](#) [MHD45PK37-K](#) [MHDTPPK25-DB25SK](#) [MHDU45ZK09-K](#) [DA9-PMJ8-B-K](#) [MHD45ZK50-K](#) [MHDD25-M-T-B-S](#) [MHDB50SP](#) [MH3101S-8821](#) [RG58SRB-R](#) [MHRJ116P4CR](#) [MHTRI-M-9-K](#) [MHDD25-F-T-B-M](#) [MHDM9-DB9S-K](#) [MHDPPK-M-37-K](#) [MHDTPPK37-K](#) [DA9-SMJ8-R-K](#) [RG58SRB-BE](#) [MHDM25-DB25P-K](#) [GA0909FFLGK-RC](#) [MHCCOV-15SN-LG](#) [MHDTZK9-RA-K](#) [DSSKM25L-DB25P-K](#) [MHD45ZK9-DM9P-K](#) [MHDVSL25-K](#) [MHCCOV-25SC-LG](#)