


GENERAL PURPOSE APPLICATION.

### FEATURES

- Complementary to TIP42CF.

### MAXIMUM RATING (Ta=25 °C)





CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		$V_{CBO}$	100	V
Collector-Emitter Voltage		$V_{CEO}$	100	V
Emitter-Base Voltage		$V_{EBO}$	5	V
Collector Current	DC	$I_C$	6	A
	Pulse	$I_{CP}$	10	
Base Current		$I_B$	2	A
Collector Power Dissipation	Ta=25 °C	$P_C$	2	W
	Tc=25 °C		25	
Junction Temperature		$T_j$	150	°C
Storage Temperature Range		$T_{stg}$	-55 ~ 150	°C

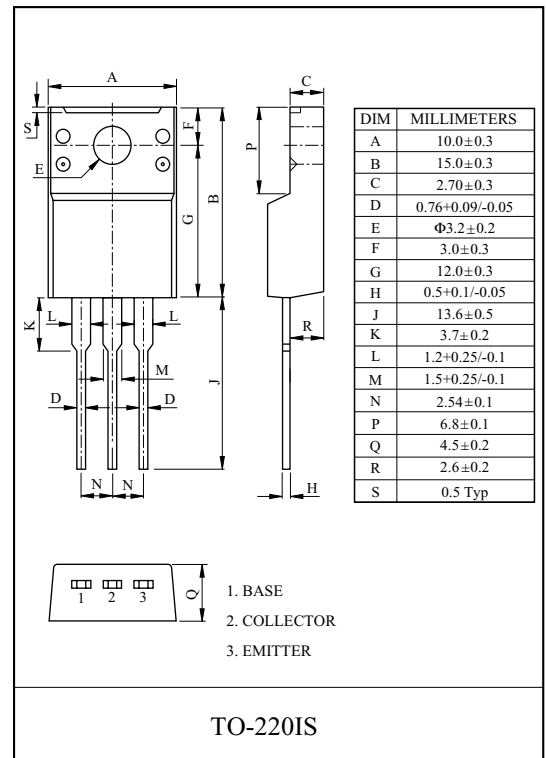

### ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Emitter Sustaining Voltage	$V_{CEO(SUS)}$	$I_C=30mA, I_B=0$	100	-	-	V
Collector Cut-off Current	$I_{CEO}$	$V_{CE}=60V, I_B=0$	-	-	0.7	mA
Collector Cut-off Current	$I_{CES}$	$V_{CE}=100V, V_{EB}=0$	-	-	400	μA
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=5V, I_C=0$	-	-	1	mA
DC Current Gain	$h_{FE}$	$V_{CE}=4V, I_C=0.3A$	30	-	-	
		$V_{CE}=4V, I_C=3A$	15	-	75	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=6A, I_B=600mA$	-	-	1.5	V
Base-Emitter On Voltage	$V_{BE(on)}$	$V_{CE}=4V, I_C=6A$	-	-	2.0	V
Transition Frequency	$f_T$	$V_{CE}=10V, I_C=500mA$	3.0	-	-	MHz

# TIP41CF

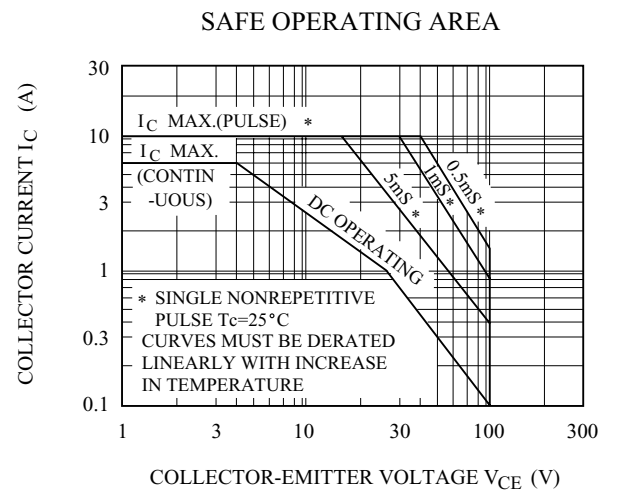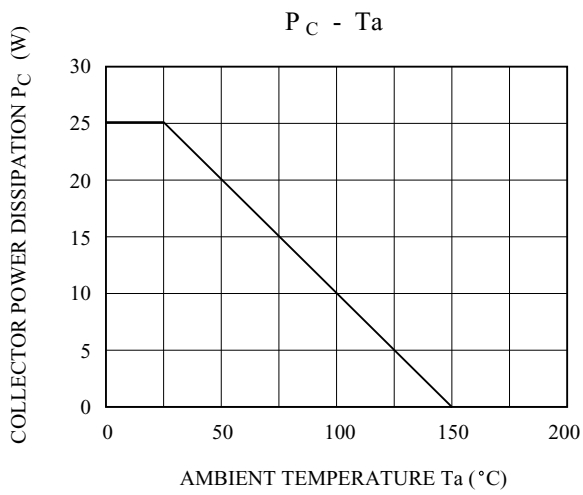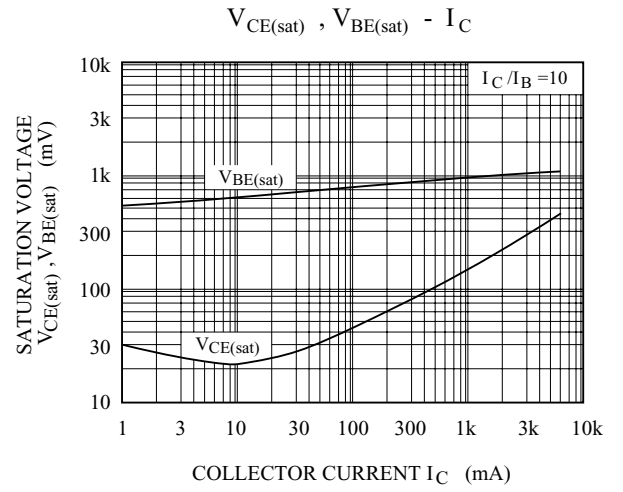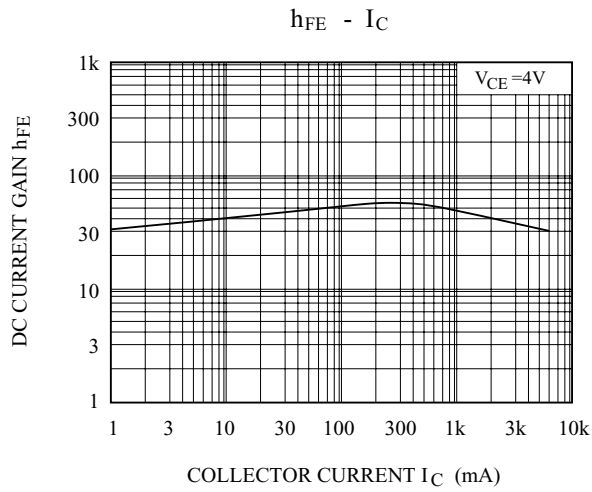

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [KEC manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N4403](#) [2N6728](#)  
[2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-](#)  
[TL-E](#) [MCH4021-TL-E](#) [Jantx2N5416](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#)  
[TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANTX2N3735](#) [JANSR2N2222AUB](#)  
[CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#)  
[MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#)