


## Schottky Diodes

### 1N5817FL ~ 1N5819FL

#### ■ Features

- Low power loss, high efficiency
- High current capability
- Low forward voltage drop
- High Surge Capability

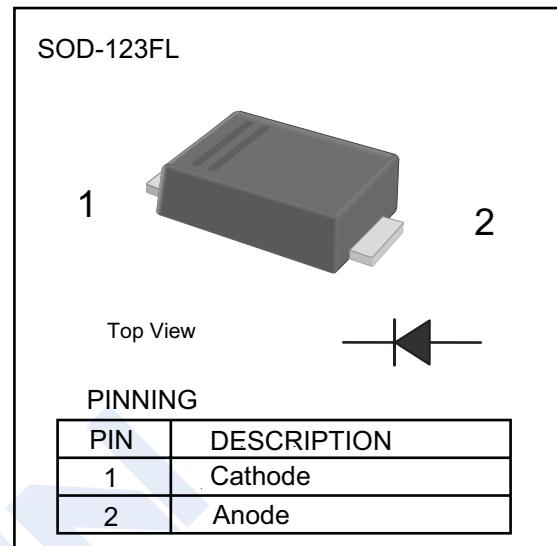

#### ■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	1N5817FL	1N5818FL	1N5819FL	Unit
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	20	30	40	V
RMS Voltage	V <sub>RMS</sub>	14	21	28	
DC Blocking Voltage	V <sub>DC</sub>	20	30	40	
Forward Voltage @ If=1A	V <sub>F</sub>	0.45	0.55	0.6	
Forward Voltage @ If=3.1A		0.75	0.875	0.9	
Average Forward Rectified Current @ T <sub>L</sub> =90°C	I <sub>FAV</sub>	1			A
Non-Repetitive Peak Forward Surge Current @8.3ms	I <sub>FSM</sub>	25			
Reverse Voltage Leakage Current Ta = 25°C	I <sub>R</sub>	1			mA
Ta = 100°C		10			
Typical Junction Capacitance	C <sub>J</sub>	110			pF
Junction Temperature	T <sub>J</sub>	125			°C
Storage Temperature range	T <sub>stg</sub>	-55 to 125			

#### ■ Marking

NO.	1N5817FL	1N5818FL	1N5819FL
Marking	SJ	SK	SL

## Schottky Diodes

### 1N5817FL ~ 1N5819FL

#### ■ Typical Characteristics

Fig.1 Forward Current Derating Curve

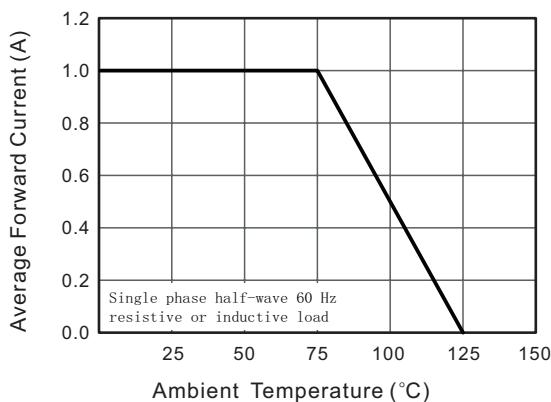


Fig.3 Typical Forward Characteristic

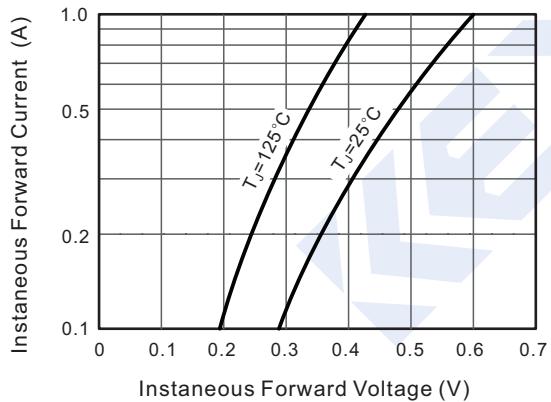


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

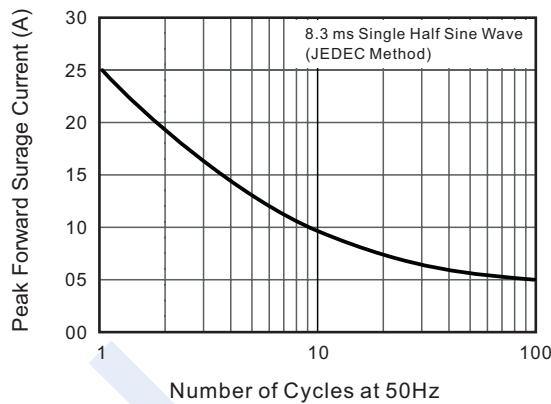


Fig.2 Typical Reverse Characteristics

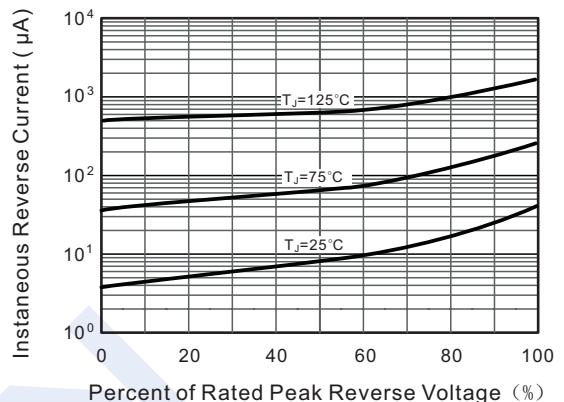


Fig.4 Typical Junction Capacitance


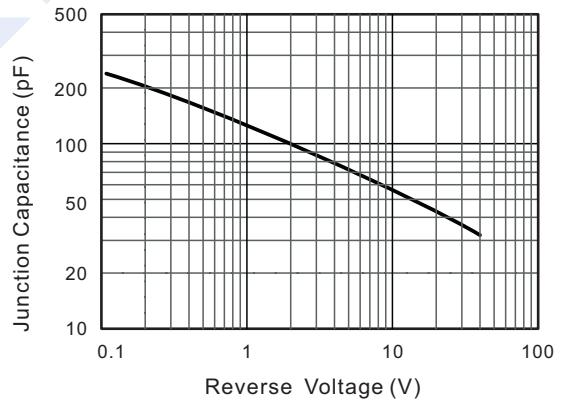


Fig.6-Typical Transient Thermal Impedance

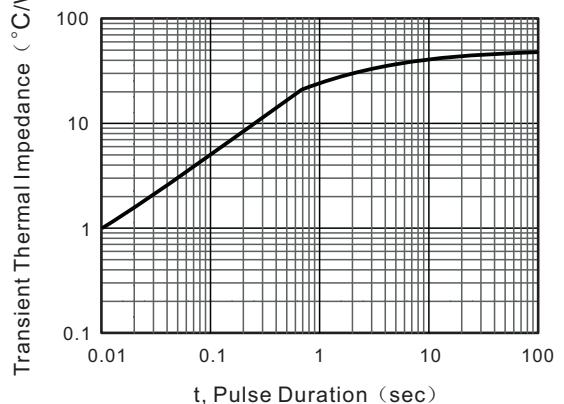


## Schottky Diodes

### 1N5817FL ~ 1N5819FL


#### ■ Package Outline Dimensions

Plastic surface mounted package; 2 leads

SOD-123FL

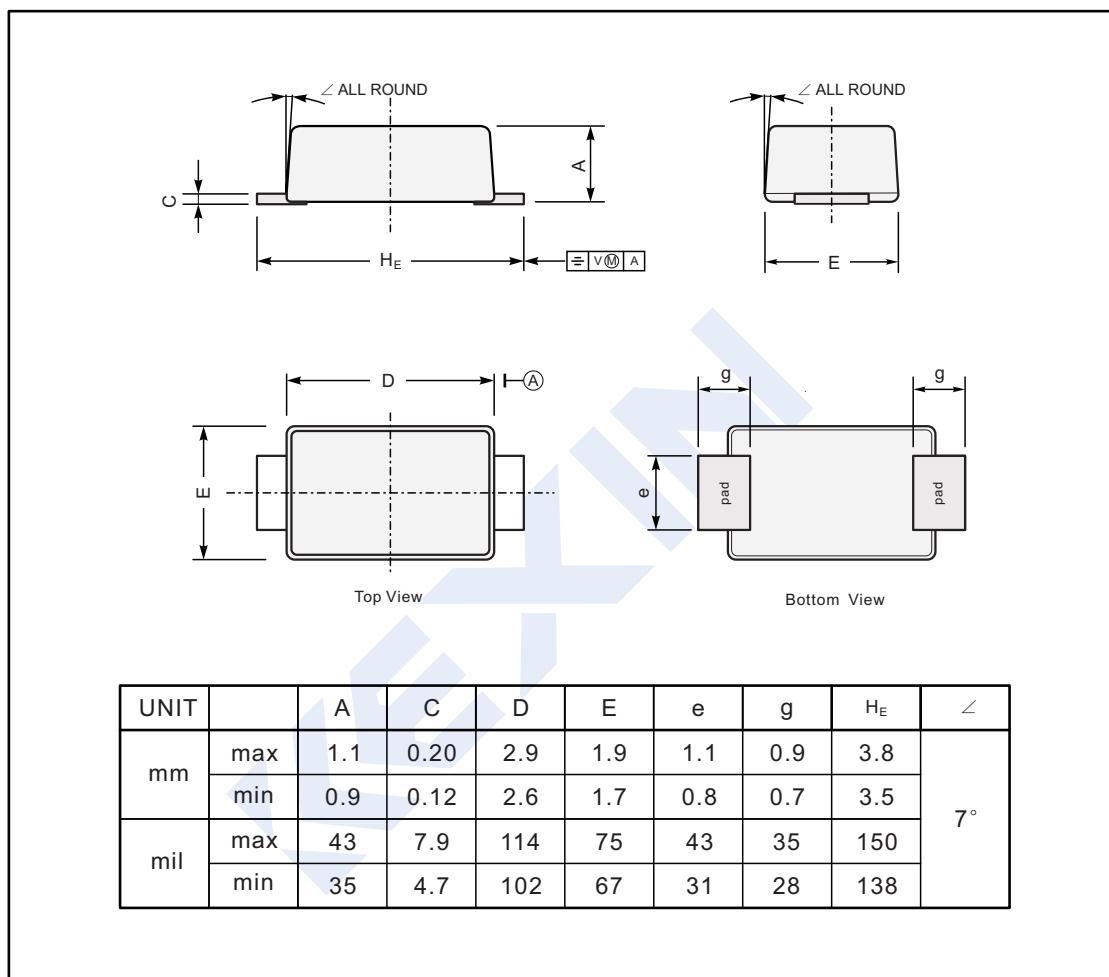

#### ■ The Recommended Mounting Pad Size

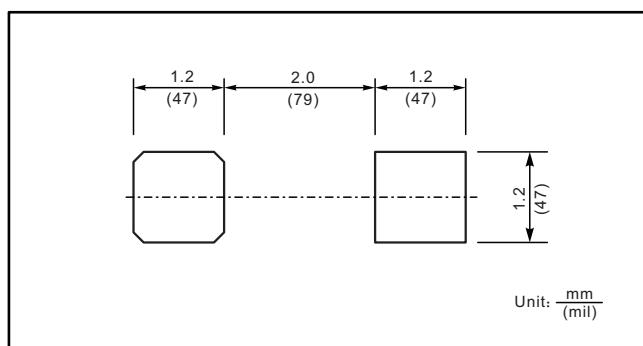

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Schottky Diodes & Rectifiers category:***

***Click to view products by KEXIN manufacturer:***

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)