
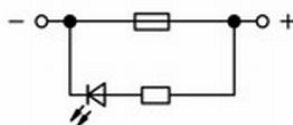


Item no.: 2006-1681/1000-413
 Product description: 2-conductor fuse terminal block for mini-automotive blade-style fuses with test option 24 V with blown fuse indication by LED
 Power consumption LED: 4.8 mA

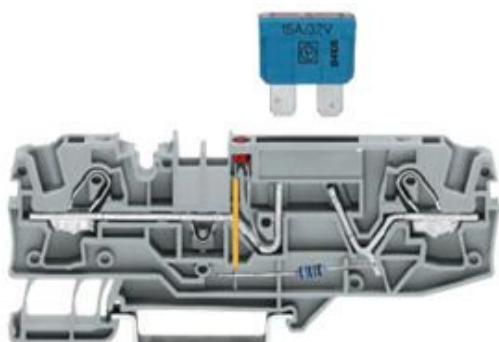

Produkt kann von Bild abweichen / product may differ

Packing unit 25 pieces

RoHS compliant

Cross section [AWG]	20 - 20 AWG
Cross section to [AWG]	8 AWG
Cross section to [AWG]	8 AWG
Weight	0 g
Width	0.295 in
Cross section [mm ²]	0.5 - 0.5 mm ²
Strip length	0.55 in
Height	1.295 in
Depth	3.791 in
Cross section to [mm ²]	6 mm ²
Width	7.5 mm
Measured shock voltage	8 kV
Cross section to [mm ²]	10 mm ²
Strip length from	13 mm
Strip length to	15 mm
Current intensity EN	25 A
Current intensity EN	30 A
Height	32.9 mm

Depth	96.3 mm
Measured voltage EN	800 V
No. of connection Points	2
No. of potentials	2



Pollution degree	3
Connection method	CAGE CLAMP®S Connection
Wiring method	s + f-st
Connection method	CAGE CLAMP®S Connection
Color	grey
Wiring type	Front-entry
Customs Tariff No.	85369085
Country of Origin	Deutschland
Mounting	TS 35

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [wago manufacturer](#):

Other Similar products are found below :

[750-460](#) [231-118/026-000](#) [231-303/026-000](#) [231-620/019-000](#) [257-403](#) [280-438](#) [280-831](#) [284-624](#) [210-111](#) [231-303/037-000](#) [231-446/001-000_NR](#) [232-216/026-000](#) [234-510](#) [264-726](#) [280-339](#) [0283-0671](#) [830-800/000-305](#) [750-512](#) [750-455](#) [51251782](#) [286-312](#) [713-1428/107-000](#) [731-138/048-000](#) [750-459](#) [750-517](#) [750-602](#) [793-3505](#) [826-172](#) [859-304](#) [280-335](#) [231-535/001-000](#) [2604-1105](#) [2604-1106](#) [2604-1504](#) [2606-1103/020-000](#) [2624-1103](#) [2626-3103/020-000](#) [821-104](#) [713-1107](#) [852-1411](#) [2106-1307](#) [2116-5307](#) [832-1205](#) [832-3604](#) [2009-110](#) [281-512/281-501](#) [286-336](#) [750-421](#) [750-838](#) [753-559](#)