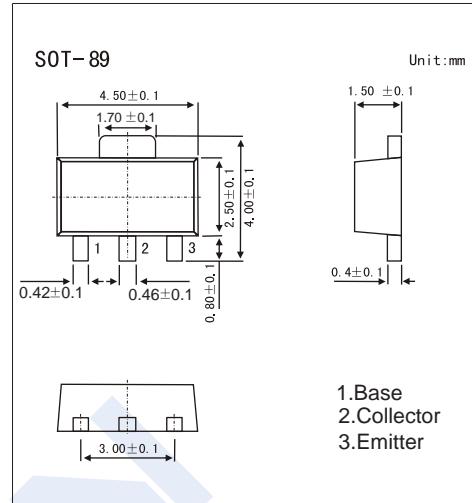


**NPN Transistors****2SD882****■ Features**

- Excellent h<sub>FE</sub> linearity and high h<sub>FE</sub>  
h<sub>FE</sub> = 60 to 400 (V<sub>CE</sub> = 2 V, I<sub>c</sub> = 1 A)

**■ Absolute Maximum Ratings Ta = 25°C**

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V <sub>CBO</sub>	40	V
Collector to Emitter Voltage	V <sub>CEO</sub>	30	V
Emitter to Base Voltage	V <sub>EBO</sub>	6	V
Collector Current to Continuous	I <sub>c</sub>	3	A
Collector Dissipation	P <sub>c</sub>	0.5	W
Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-55 to 150	°C

**■ Electrical Characteristics Ta = 25°C**

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V <sub>CBO</sub>	I <sub>c</sub> =100uA ,I <sub>e</sub> =0	40			V
Collector-emitter breakdown voltage	V <sub>CEO</sub>	I <sub>c</sub> = 10 mA , I <sub>b</sub> =0	30			V
Emitter-base breakdown voltage	V <sub>EBO</sub>	I <sub>e</sub> = 100 uA ,I <sub>c</sub> =0	6			V
Collector cut-off current	I <sub>cbo</sub>	V <sub>CB</sub> =40 V , I <sub>e</sub> =0			1	uA
Collector cut-off current	I <sub>ceo</sub>	V <sub>CE</sub> =30 V , I <sub>b</sub> =0			10	uA
Emitter cut-off current	I <sub>ebo</sub>	V <sub>EB</sub> =6V , I <sub>c</sub> =0			1	uA
DC current gain	h <sub>FE</sub>	V <sub>CE</sub> = 2V, I <sub>c</sub> = 1A	60		400	
		V <sub>CE</sub> =2V, I <sub>c</sub> = 100mA	32			
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>c</sub> =2A, I <sub>b</sub> = 0.2A			0.5	V
Base-emitter saturation voltage	V <sub>BE(sat)</sub>	I <sub>c</sub> =2A, I <sub>b</sub> = 0.2A			1.5	V
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> =5 V, I <sub>c</sub> =0.1mA,f = 10MHz	50			MHz


**■ Classification of h<sub>fe(1)</sub>**

Type	2SD882-R	2SD882-Q	2SD882-P	2SD882-E
Range	60-120	100-200	160-320	200-400
Marking	D882			

## NPN Transistors

## 2SD882

## ■ Typical Characteristics

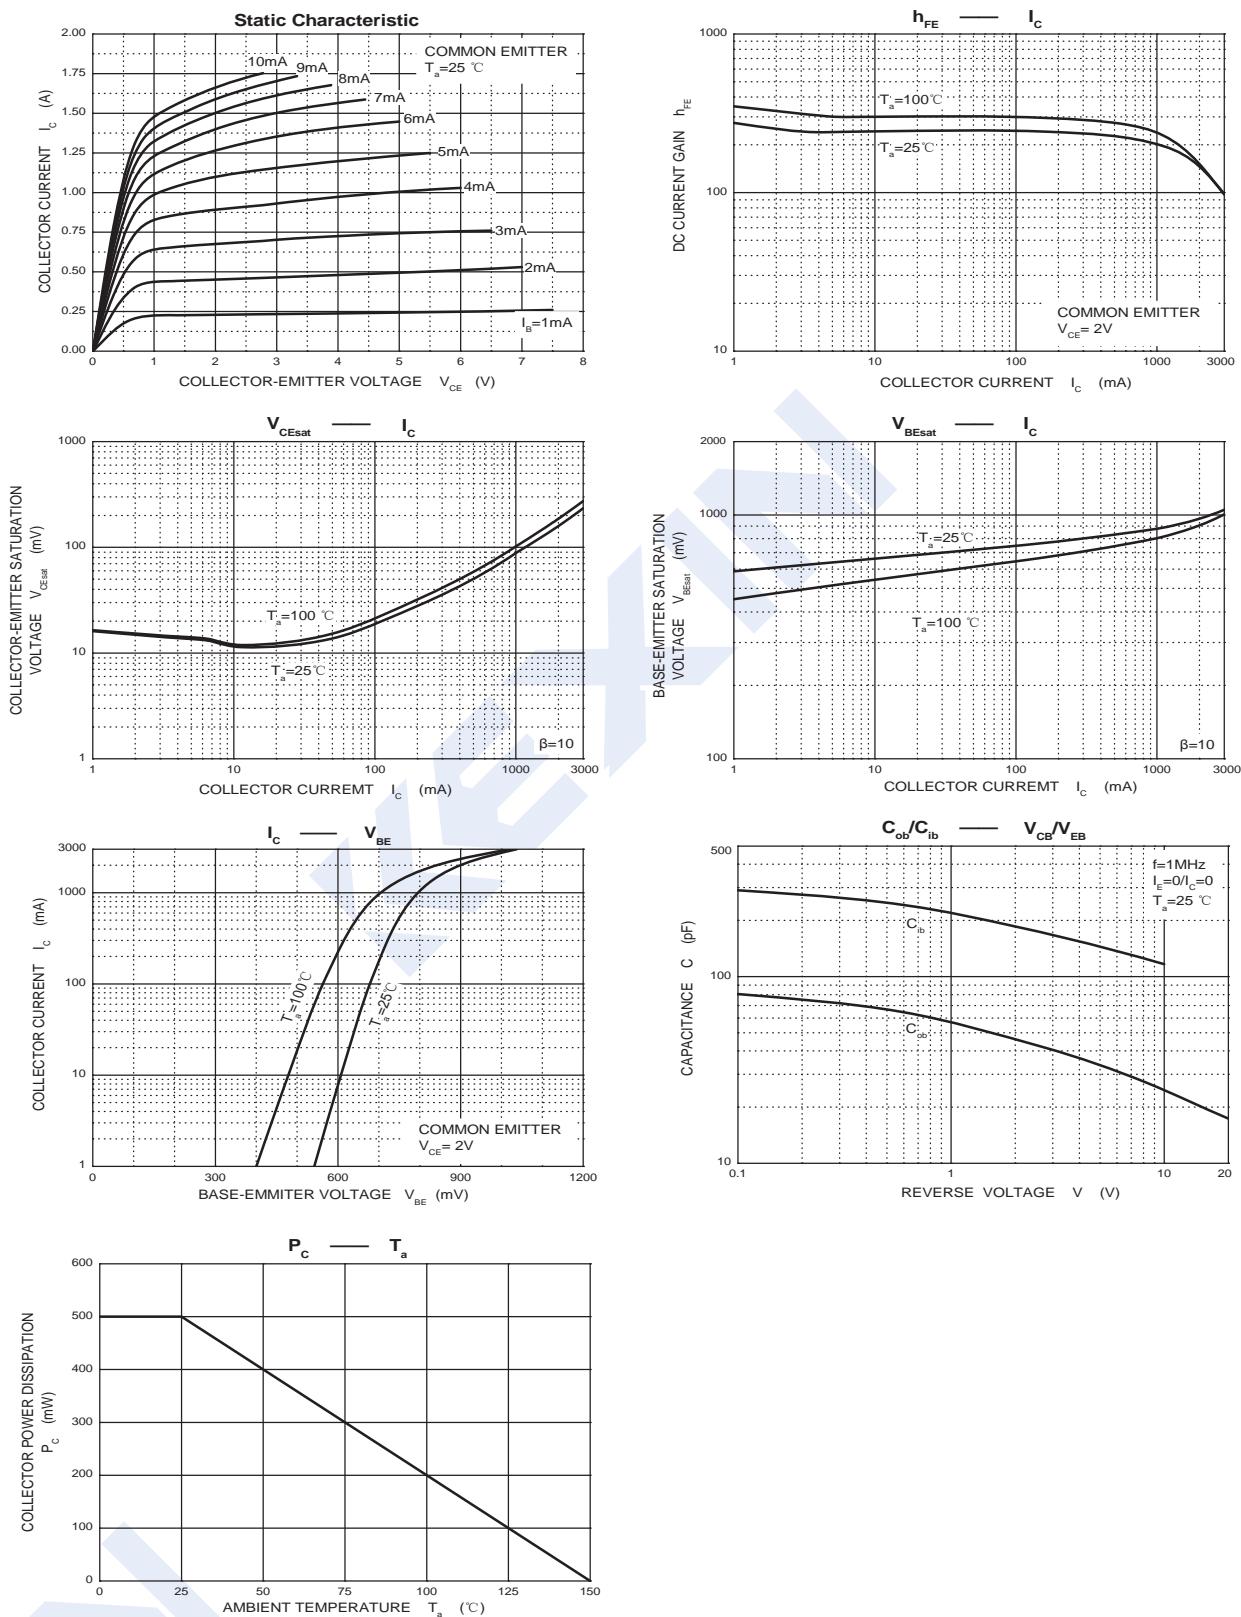

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by KEXIN manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T\)](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)  
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)