


Schottky Diodes

SD103AWS/BWS/CWS

■ Features

- Low Positive Pressure Drop.
- Can Ignore the Reverse Recovery Time.

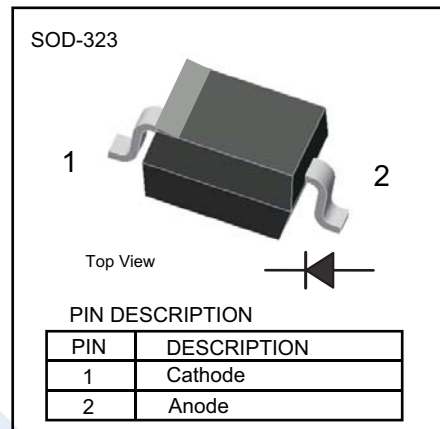

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating			Unit
		SD103AWS	SD103BWS	SD103CWS	
Peak Repetitive Reverse Voltage	V _{RRM}				V
Working Peak Reverse Voltage	V _{RWM}	40	30	20	
DC Reverse Voltage	V _R				
RMS Reverse Voltage	V _{R(RMS)}	28	21	14	
Non-Repetitive Peak Forward Current	I _{FM}	350			mA
Non-Repetitive Peak Forward Surge Current	I _{FSM}	1.5			A
Power Dissipation	P _d	200			mW
Thermal Resistance Junction to Ambient	R _{θJA}	625			°C/W
Junction Temperature	T _J	125			°C
Storage Temperature range	T _{stg}	-55 to 125			

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse breakdown voltage	V _R	I _R = 10 uA	V _R			V
Forward voltage Drop	V _{FM}	I _F = 20 mA			0.37	
		I _F = 200 mA			0.6	
Instantaneous Reverse current	I _{RM}	V _R = 30 V	SD103AWS		5	uA
		V _R = 20 V	SD103BWS			
		V _R =10 V	SD103CWS			
Total capacitance	C _T	V _R = 0 V, f= 1 MHz	10			pF
Reverse recovery time	t _{rr}	I _F =I _R =200mA, I _{rr} =0.1xI _R , R _L =100Ω	50			ns


■ Marking

Model	SD103AWS	SD103BWS	SD103CWS
Marking	S4	S5	S6

Schottky Diodes

SD103AWS/BWS/CWS

■ Typical Characteristics

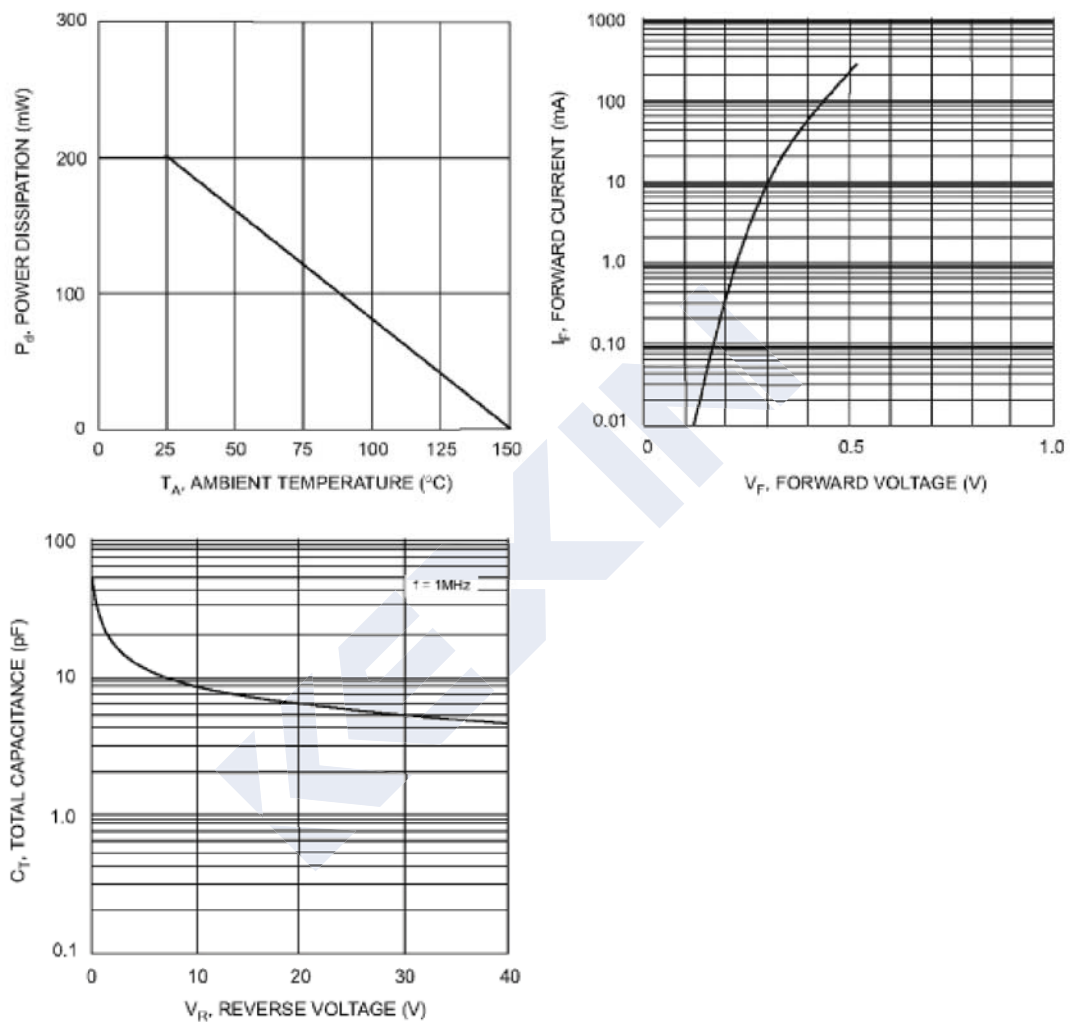


Schottky Diodes

SD103AWS/BWS/CWS


■ Package Outline Dimensions

Plastic surface mounted package; 2 leads

SOD-323

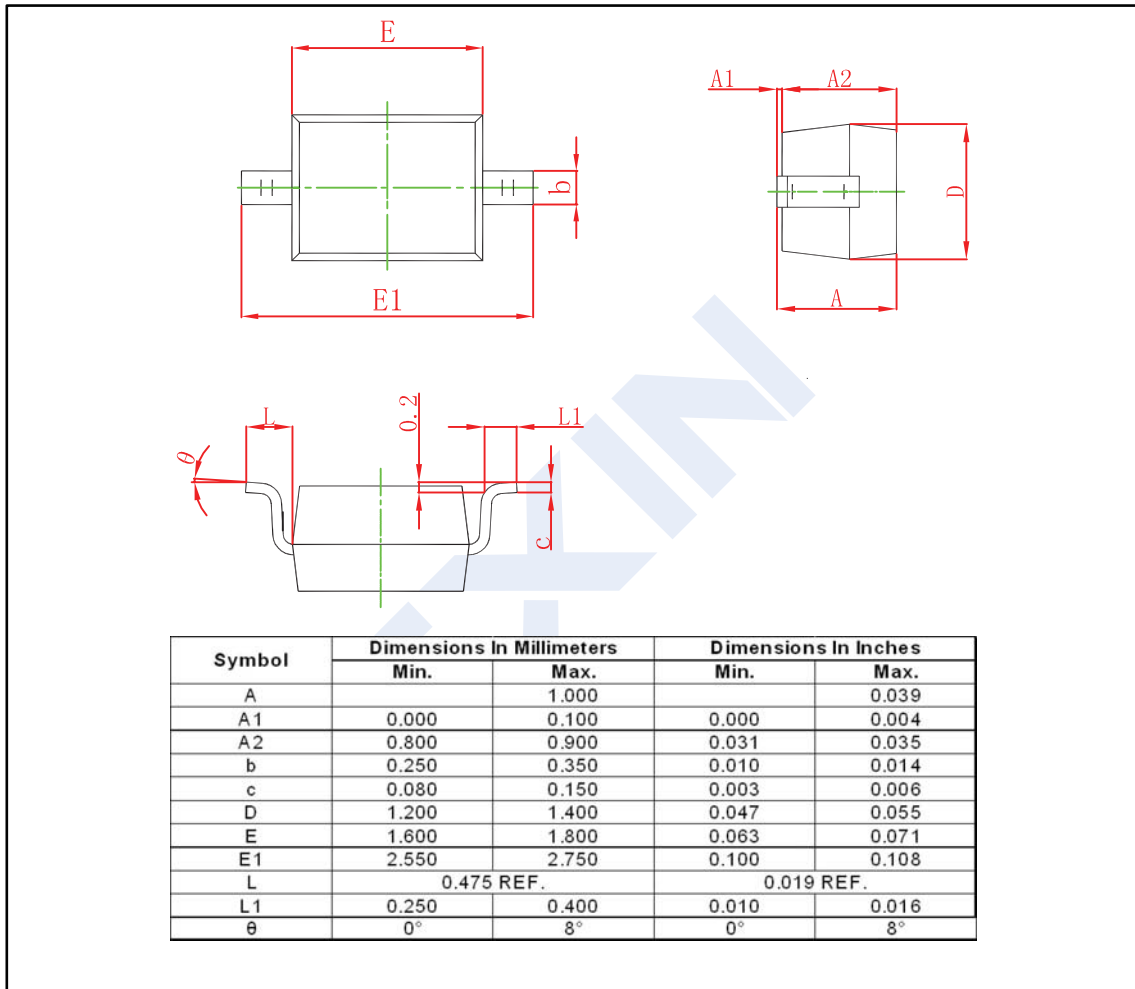

■ The Recommended Mounting Pad Size

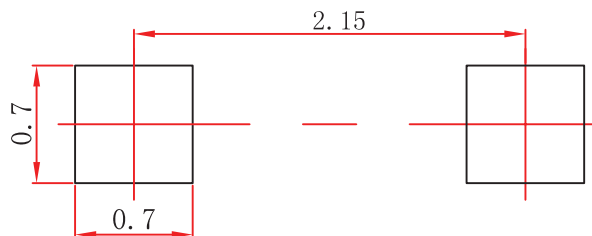

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [KEXIN](#) manufacturer:

Other Similar products are found below :

[CUS06\(Te85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(Te85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)