


Schottky Diodes

SS22FL ~ SS220FL

■ Features

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

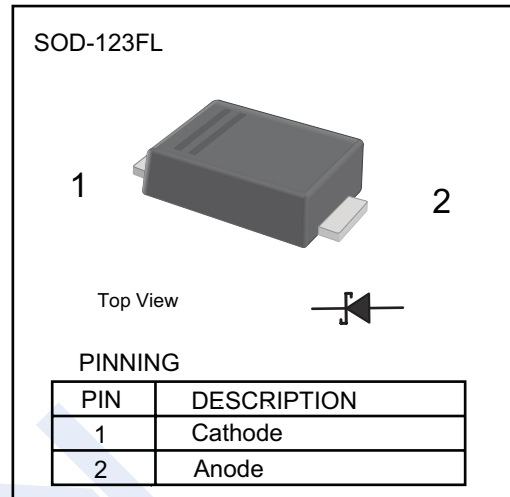

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	SS 22FL	SS 24FL	SS 26FL	SS 28FL	SS 210FL	SS 212FL	SS 215FL	SS 220FL	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	V
Surge Peak Reverse Voltage	V_{RSM}	14	28	42	56	70	84	105	140	
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200	
Averaged Forward Current	I_O	2								A
Peak forward surge current	I_{FSM}	50				40				
Instantaneous Forward Voltage at 2A	V_F	0.55		0.7		0.85		0.95		V
Maximum DC Reverse Current at rated DC blocking voltage	I_{R66}	$T_A=25^\circ\text{C}$ 0.5			$T_A=100^\circ\text{C}$ 0.3					mA
		5			3					
Typical Junction Capacitance *1	C_j	220			80					pF
Typical thermal resistance *2	R_{thJA}	65								$^\circ\text{C}/\text{W}$
Junction Temperature	T_j	125								$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to 150								

* 1 Measured at 1MHz and applied reverse voltage of 4V D.C

* 2 P.C.B. mounted with 2" × 2" (5×5 cm) copper pad areas.

■ Marking

NO.	SS22FL	SS24FL	S26FL	SS28FL	SS210FL	SS212FL	SS215FL	SS220FL
Marking	S22	S24	S26	S28	S210	S212	S215	S220

Schottky Diodes

SS22FL ~ SS220FL

■ Typical Characteristics

Fig.1 Forward Current Derating Curve

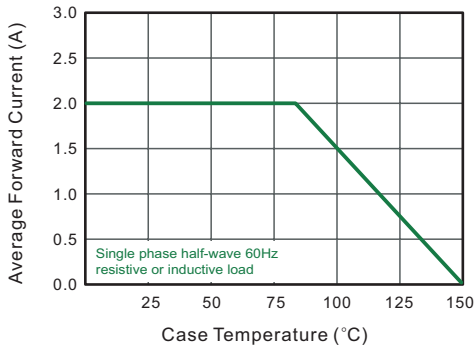


Fig.2 Typical Reverse Characteristics

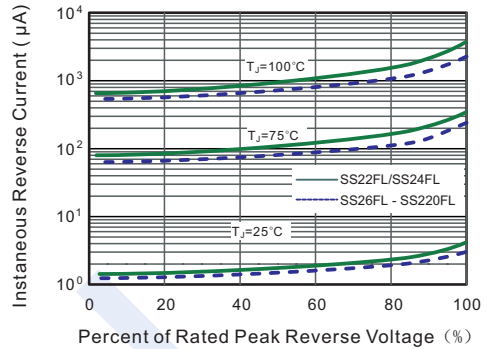


Fig.3 Typical Forward Characteristic

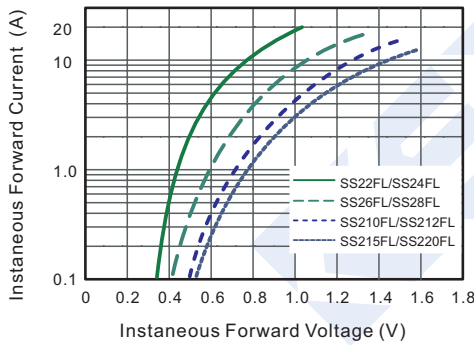


Fig.4 Typical Junction Capacitance

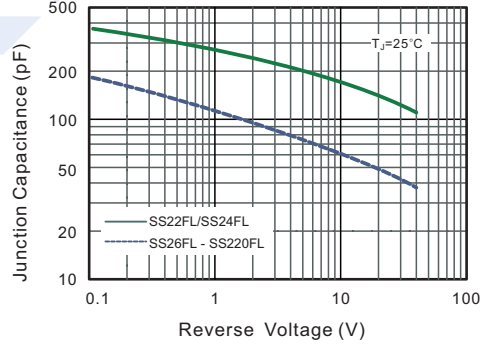


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


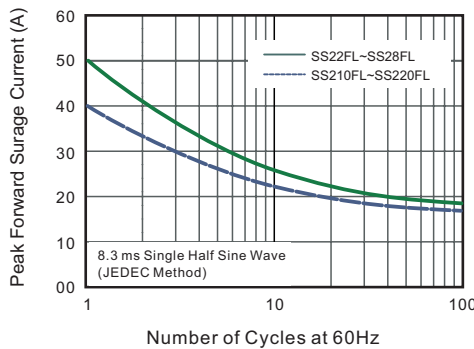


Fig.6- Typical Transient Thermal Impedance

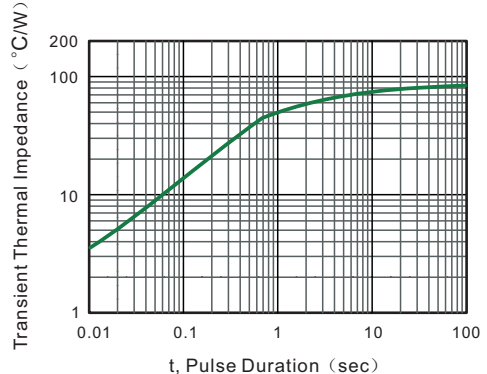


Schottky Diodes SS22FL ~ SS220FL


■ Package Outline Dimensions

Plastic surface mounted package; 2 leads

SOD-123FL

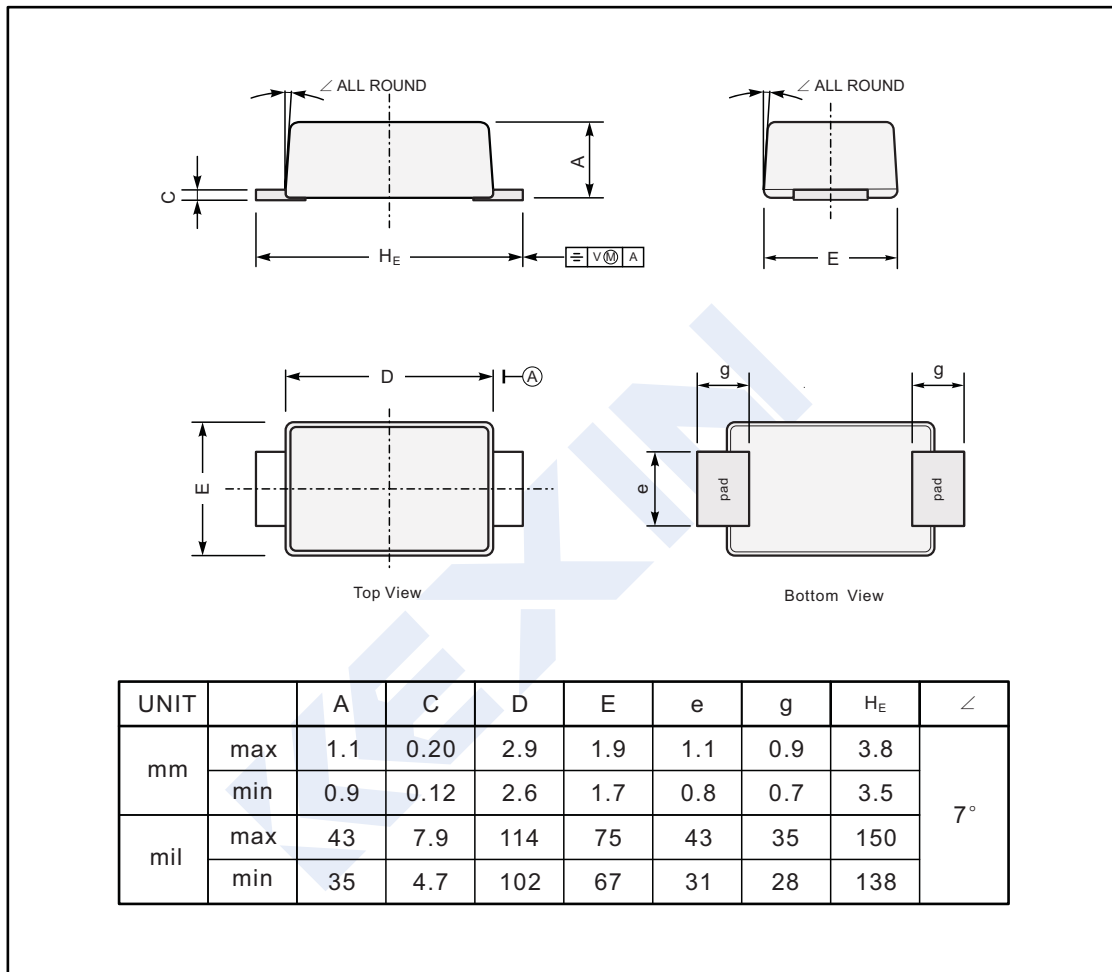

■ The Recommended Mounting Pad Size

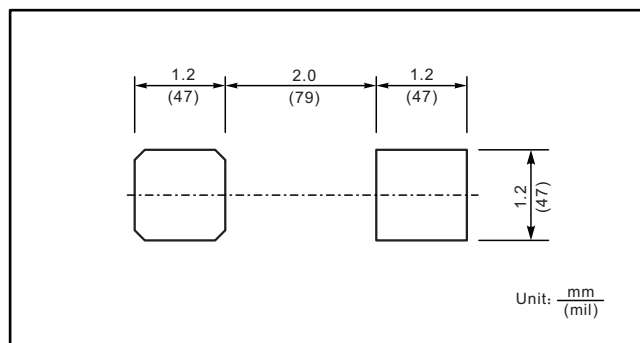

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [KEXIN](#) manufacturer:

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)