

Keysight Technologies U1250 Series Handheld Digital Multimeters

Data Sheet



Test more – more safely

The Keysight Technologies, Inc. U1250 Series handheld digital multimeters (DMMs) exceed your expectations by delivering powerful features and performance that meet your toughest requirements and applications. The series latest multimeters, the offering capabilities and functions you need.

Key Features

- Superior contrast from organic LED (OLED) display¹
- 50,000-count dual display
- Up to 0.025% basic DCV accuracy
- True-RMS AC and AC+DC² measurements
- K-type and J-type² temperature measurements
- Manual and automated (interval) data logging; internally to DMM and externally to PC
- CAT III 1000 V and CAT IV 600 V safety protection
- Built-in 20-MHz frequency counter²
- Built-in programmable square-wave generator²

Do More with Just One Instrument

The basic model, U1251B, expands your capabilities beyond typical DMM measurements to include data logging. The U1252B starts with the same foundation, and then adds a 20-MHz frequency counter and programmable square-wave generator—so you'd be able to perform more tests conveniently with one tool. What's more: both models come bundled with a complete set of accessories to equip you right from the start at no extra cost.

Offering the same functionality as the U1252B, the U1253B is the world's first OLED handheld DMM. You won't have to squint to be sure you're reading it right: On the go or on the bench, you'll get crystal-clear viewing indoors, even in dark, off-angle situations.

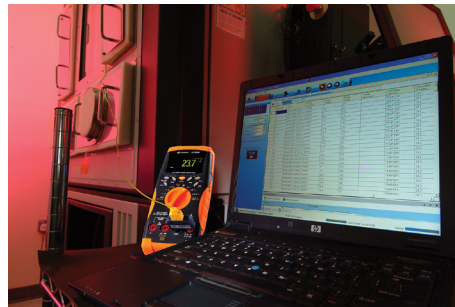


Figure 1. Automate recording of measurements with bundled GUI data-logging software.

Find Problems Quickly

Troubleshooting can be tricky, especially when you're dealing with elusive problems. With the U1250 Series' data logging capability, you can ensure that every reading gets recorded manually or at intervals you specify. Better yet: you can have virtually unlimited data logging saves when you connect any of the U1250 Series DMM to a PC with the optional IR-to-USB cable.

In addition, the U1250 Series lets you achieve greater confidence in your measurements with accurate true-RMS AC measurements, low DCV error rate of up to 0.025% and high-resolution display of 50,000 counts.

Uncompromising Ruggedness and Safety

The U1250 Series DMMs are housed in robust overmold enclosures, rated at CAT III 1000 V and CAT IV 600 V and operate over a wide temperature range of -20°C to $+55^{\circ}\text{C}$. Each DMM also include a 30 kA high energy fuse to further protect you against violent fuse failures during high-current measurements. Built tough and certified to stringent industrial standards, the U1250 DMM is what you need to face the demands of everyday tasks.

[1] U1253B model

[2] U1252B/U1253B models

Take a Closer Look



OLED display with approximately 160° viewing angle, and high contrast ratio of 2000:1 for crystal-clear viewing¹



50,000 count dual display with true-RMS reading capability



SHIFT key and one-stop function keys for easy access

Broad range of measurement functions, including temperature and capacitance

Built-in battery charging for optimum capacitance

20 MHz frequency counter²

Data logging to internal or external memory

Programmable square-wave generator for stimulation of digital circuits²

CAT III 1000 V and CAT IV 600 V overvoltage protection for assurance of your safety while you go about your task

[1] U1253B only
 [2] U1252B/U1253B only

DC Specifications

Function	Range	Resolution	Test Current/ Burden Voltage	Accuracy ± (% of reading + No. of Least Significant Digit)	
				U1251B	U1252B/U1253B
Voltage ^[1]	50.000 mV	0.001 mV	–	0.05 + 50 ^[2]	0.05 + 50 ^[2]
	500.00 mV	0.01 mV	–	0.03 + 5	0.025 + 5
	1000.0 mV	0.1 mV	–		
	5.0000 V	0.0001 V	–		
	50.000 V	0.001 V	–		
	500.00 V	0.01 V	–		
	1000.0 V	0.1 V	–	0.03 + 5	
Resistance ^[8]	500.00 Ω ^[3]	0.01 Ω	1.04 mA	0.08 + 10	0.05 + 10
	5.0000 kΩ ^[3]	0.0001 kΩ	416 μA	0.08 + 5	0.05 + 5
	50.000 kΩ	0.001 kΩ	41.2 μA		
	500.00 kΩ	0.01 kΩ	4.12 μA		
	5.0000 MΩ	0.0001 MΩ	375 nA	0.2 + 5	0.15 + 5
	50.000 MΩ ^[4]	0.001 MΩ	187 nA	1 + 10	1 + 5
	500.00 MΩ ^[4]	0.01 MΩ	187 nA	N/A	3+10 < 200 MΩ / 8+10 > 200 MΩ
	500.00 nS ^[5]	0.01 nS	187 nA	1 + 20	1 + 10
Current	500.00 μA	0.01 μA	0.06 V (100 Ω)	0.1 + 5 ^[6]	0.05 + 5 ^[6]
	5000.0 μA	0.1 μA	0.6 V (100 Ω)		
	50.000 mA	0.001 mA	0.09 V (1 Ω)	0.2 + 5 ^[6]	0.15 + 5 ^[6]
	440.00 mA	0.01 mA	0.9 V (1 Ω)		
	5.0000 A	0.0001 A	0.2 V (0.01 Ω)	0.3 + 10	0.3 + 10
	10.000 A ^[7]	0.001 A	0.4 V (0.01 Ω)		
Diode Test ^[8]	–	0.1 mV	1.04 mA	0.05 + 5	

[1] Input impedance: Refer to Table A on page 9.

[3] The accuracy of 500 Ω and 5 kΩ is specified after NULL function, which is used to subtract the test lead resistance and the thermal effect.

[4] For the range of 50 MΩ and 500 MΩ, the R.H. is specified for <60%.

[5] The accuracy is specified for <50 nS and after NULL function with open test lead.

[6] Always use the NULL function to zero out thermal effect with open test lead before measuring the signal. If the NULL function is not used, an additional 20 counts needs to be added to the DC current accuracy. Thermal effect could occur due to the following:

- Wrong operation to measure the high voltage of 50 V ~ 1000 V for resistance, diode, and mV measurements.
- After battery-charging has completed.
- After measuring a current greater than 440 mA, it is suggested that the meter be left to cool down for twice the measuring time used.

[7] Current can be measured up to 10 A continuously. An additional 0.5% needs to be added to the specified accuracy if the signal measured is in the range of 10 A~20 A for 30 seconds maximum. After measuring a current of > 10 A, leave the meter to cool down for twice the measuring time used before application of low current measurement.

[8] Maximum open voltage: <+ 4.2 V.

U1251B AC Voltage Specifications

Function	Range	Resolution	Accuracy ± (% of reading + No. of Least Significant Digit)			
			Frequency			
			30 Hz ~ 45 Hz	45 Hz ~ 1 kHz	1 kHz ~ 5 kHz	5 kHz ~ 30 kHz
True Rms Ac Voltage ^{[1] [2]}	50.000 mV	0.001 mV	1.0+60	0.6+40	1.0+40	1.6+60
	500.00 mV	0.01 mV		0.6+25		
	1000.0 mV	0.1 mV	1.0+25	1.0+40	3.5+120	
	5.0000 V	0.0001 V				
	50.000 V	0.001 V				
	500.00 V	0.01 V	0.6+40	1.0+40	N/A	
	1000.0 V	0.1 V			N/A	

U1251B AC Current Specifications

Function	Range	Resolution	Accuracy ± (% of reading + No. of Least Significant Digit)		
			Frequency		
			30 Hz ~ 45 Hz	45 Hz ~ 2 kHz	2 kHz ~ 20 kHz
Ac Current ^[2]	500.00 µA ^[4]	0.01 µA	1.5+50	0.8+20	3.0+80
	5000.0 µA	0.1 µA	1.5+40		3.0+60
	50.000 mA	0.001 mA	2.0+40[6]	0.8+20	3+60, <3 A/5 kHz
	440.00 mA	0.01 mA			
	5.0000 A	0.0001 A			
	10.000 A ^[5]	0.001 A			

U1252B/U1253B AC Voltage Specifications

Function	Range	Resolution	Accuracy ± (% of reading + No. of Least Significant Digit)				
			Frequency				
			20 Hz ~ 45 Hz	45 Hz ~ 1 kHz	1 kHz ~ 5 kHz	5 kHz ~ 15 kHz	15 kHz~100 kHz ^[8]
True Rms Ac Voltage ^{[1] [2] [9]}	50.000 mV	0.001 mV	1.5+60	0.4+40	0.7+40	0.75+40	3.5+120
	500.00 mV	0.01 mV		0.4+25	0.4+25		
	1000.0 mV	0.1 mV	1.5+60	0.4+25	0.4+25	1.5+40	3.5+120
	5.0000 V	0.0001 V					
	50.000 V	0.001 V					
	500.00 V	0.01 V	0.4+40	0.4+40	0.4+40	N/A	N/A
	1000.0 V	0.1 V				N/A	N/A

[1] Input impedance: Refer to Table A on page 9.

[3] The accuracy of 500 Ω and 5 kΩ is specified after NULL function, which is used to subtract the test lead resistance and the thermal effect.

[4] For the range of 50 MΩ and 500 MΩ, the R.H. is specified for <60%.

[5] The accuracy is specified for <50 nS and after NULL function with open test lead.

[6] Always use the NULL function to zero out thermal effect with open test lead before measuring the signal. If the NULL function is not used, an additional 20 counts needs to be added to the DC current accuracy. Thermal effect could occur due to the following:

- Wrong operation to measure the high voltage of 50 V ~ 1000 V for resistance, diode, and mV measurements.
- After battery-charging has completed.
- After measuring a current greater than 440 mA, it is suggested that the meter be left to cool down for twice the measuring time used.

[7] Current can be measured up to 10 A continuously. An additional 0.5% needs to be added to the specified accuracy if the signal measured is in the range of 10 A~20 A for 30 seconds maximum. After measuring a current of > 10 A, leave the meter to cool down for twice the measuring time used before application of low current measurement.

[8] Maximum open voltage: <+ 4.2 V.

U1252B/U1253B AC Current Specifications

Function	Range	Resolution	Accuracy ± (% of reading + No. of Least Significant Digit)			
			Frequency			
			20 Hz ~ 45 Hz	45 Hz ~ 1 KHz	1 KHz ~ 20 KHz	20 KHz~100 KHz ^[7]
TRUE Rms Ac Current ^{[2] [9]}	500.00 µA ^[4]	0.01 µA	1.0+20	0.7+20	0.75+20	5.0+80
	5000.0 µA	0.1 µA				
	50.000 mA	0.001 mA				
	440.00 mA	0.01 mA	1.5+20 ^[6]	3+60, <3 A/5 kHz	1.5+20	N/A
	5.0000 A	0.0001 A				
	10.000 A ^[5]	0.001 A				

U1252B/U1253B AC+DC Voltage Specifications

Function	Range	Resolution	Accuracy ± (% of reading + No. of Least Significant Digit)				
			Frequency				
			30 Hz ~ 45 Hz	45 Hz ~ 1 kHz	1 kHz ~ 5 kHz	5 kHz ~ 15 kHz	15 kHz~100 kHz ^[4]
True Rms Ac Voltage ^{[1] [2]}	50.000 Mv	0.001 Mv	1.5+80	0.4+60	0.7+60	0.8+60	3.5+220
	500.00 mV	0.01 mV					
	1000.0 mV	0.1 mV	1.5+65	0.4+30	0.4+30	0.8+45	3.5+125
	5.0000 V	0.0001 V					
	50.000 V	0.001 V			0.6+30	1.5+45	
	500.00 V	0.01 V	0.4+30	0.4+30	N/A	N/A	N/A
	1000.00 V	0.1 V					
			0.4+45	0.4+45	N/A	N/A	

[1] Input impedance: Refer to Table A on page 9.

[2] AC mV/V and AC µA/mA/A specifications are true RMS AC coupled, valid from 5% to 100% of range. The crest factor may be up to 3 at full scale, up to 5 at half-scale, except for 1000 mV and 1000 V ranges, where the crest factor is 1.5 at full scale and 3 at half scale.

[4] Input current >35 µArms.

[5] Current can be measured from 2.5 A up to 10 A continuously. An additional 0.5% needs to be added to the specified accuracy if the signal measured is in the range of 10 A ~ 20 A for 30 seconds maximum. After measuring a current of >10 A, leave the meter to cool down for twice the measuring time used before application of low current measurement.

[6] Input current < 3 Arms.

[7] The additional error to be added as frequency >20 kHz and signal input <10% of range: 3 counts of LSD per kHz.

[8] The additional error to be added as frequency >15 kHz and signal input <10% of range: 3 counts of LSD per kHz.

[9] Crest factor ≤ 3.0 at full scale, 5.0 at half scale except the 1000 mV and 1000 V ranges where it is 1.5 at full scale, 3.0 at half scale. For non-sinusoidal waveform, add 0.1% of reading ± 0.3% of range.

U1252B/U1253B AC+DC Current Specifications

Function	Range	Resolution	Accuracy ± (% of reading + No. of Least Significant Digit)		
			Frequency		
			30 Hz ~ 45 Hz	45 Hz ~ 1 kHz	1 kHz ~ 20 kHz
True Rms Ac Current ^[10]	500.00 µA ^[6]	0.01 µA	1.1+25	0.8+25	0.8+25
	5000.0 µA	0.1 µA			
	50.000 mA	0.001 mA	1.2+25	0.9+25	0.9+25
	440.00 mA	0.01 mA			
	5.0000 A	0.0001 A	1.8+30[8]	0.9+30	3.3+70, <3 A/5 kHz
	10.000 A ^[7]	0.001 A		0.9+25	

U1251B/U1252B Temperature Specifications

Thermocouple Type	Range		Resolution	Accuracy	
	°C	°F		°C	°F
K	-200 ~ 1372 °C	-328 ~ 2502 °F	0.1 °C/0.1 °F	0.3% + 3 °C	0.3% + 6 °F
J (for U1252A/U1252B)	-210 ~ 1200 °C	-346 ~ 2192 °F	0.1 °C/0.1 °F	0.3% + 3 °C	0.3% + 6 °F

U1253B Temperature Specifications

Thermocouple Type	Range		Resolution	Accuracy	
	°C	°F		°C	°F
K	-200 ~ -40 °C	-104 ~ -40 °F	0.1 °C/0.1 °F	1% + 3 °C	1% + 5.4 °F
	-40 ~ 1372 °C	-40 ~ 2502 °F	0.1 °C /0.1 °F	1% + 1 °C	1% + 1.8 °F
J	-210 ~ -40 °C	-346 ~ -40 °F	0.1 °C /0.1 °F	1% + 3 °C	1% + 5.4 °F
	-40 ~ 1200 °C	-40 ~ 2192 °F	0.1 °C /0.1 °F	1% + 1 °C	1% + 1.8 °F

Capacitance Specifications

Range	Resolution	Accuracy	Measuring Rate at Full Scale	Max. Display
10.000 nF	0.001 nF	1% + 8	4 times/sec.	11000 counts
100.00 nF	0.01 nF			
1000.0 nF	0.1 nF			
10.000 µF	0.001 µF			
100.00 µF	0.01 µF			
1000.0 µF	0.1 µF			
10.000 mF	0.001 mF	3% + 10	0.1 times/sec.	
100.00 mF	0.01 mF		0.01 times/sec	

Frequency Specifications^[5]

Range	Resolution	Accuracy		Min. Input Frequency
		U1251B/2B	U1253B	
99.999 Hz	0.001 Hz	0.02%+3 ^[9]	0.02%+3 ^[9]	1 Hz
999.99 Hz	0.01 Hz	0.02%+3, <600 kHz	0.02%+3, <600 kHz	
9.9999 kHz	0.0001 kHz			
99.999 kHz	0.001 kHz			
999.99 kHz	0.01 kHz			

U1251B Frequency Sensitivity During Voltage Measurement

Frequency Sensitivity And Trigger Level				
Input Range	Minimum Sensitivity (R.M.S. Sine Wave)		Trigger Level For Dc Coupling	
(Maximum input for specified accuracy = 10 x Range or 1000 V)	20 Hz - 100 kHz	>100 kHz ~ 200 kHz	< 100 kHz	>100 kHz ~ 200 kHz
50.000 mV	10 mV	15 mV	10 mV	15 mV
500.00 mV	25 mV	35 mV	60 mV	70 mV
1000.0 mV	40 mV	50 mV	100 mV	150 mV
5.0000 V	0.25 V	0.5 V	0.5 V / 1.25 V (< 100 Hz)	0.6 V
50.000 V	2.5 V	5 V	5 V	6 V
500.00 V	25 V	N/A	50 V	N/A
1000.0 V	50 V	N/A	300 V	N/A

U1252B/U1253B Frequency Sensitivity During Voltage Measurement

Frequency Sensitivity And Trigger Level				
Input Range	Minimum Sensitivity (R.M.S. Sine Wave)		Trigger Level For Dc Coupling	
(Maximum input for specified accuracy = 10 x Range or 1000 V)	20 Hz ~ 200 kHz	>200 kHz ~ 500 kHz	< 100 kHz	>100 kHz ~ 500 kHz
50.000 mV	10 mV	25 mV	10 mV	25 mV
500.00 mV	70 mV	150 mV	70 mV	150 mV
1000.0 mV	120 mV	300 mV	120 mV	300 mV
5.0000 V	0.3 V	1.2 V	0.6 V	1.5 V
50.000 V	3 V	5 V	6 V	15 V
500.00 V	30 V < 100 kHz	N/A	60 V	N/A
1000.0 V	50 V < 100 kHz	N/A	120 V	N/A

Frequency Sensitivity During Current Measurement

Input Range	Minimum Sensitivity (R.m.s. Sine Wave) 20 Hz ~ 20 KHz
500.00 μ A	100 μ A
5000.0 μ A	250 μ A
50.000 mA	10 mA
440.00 mA	25 mA
5.0000 A	1 A
10.000 A	2.5 A

[1] Input impedance: Refer to Table A on page 9.

[2] Crest factor ≤ 3.0 at full scale, 5.0 at half scale except the 1000 mV and 1000 V ranges where it is 1.5 at full scale, 3.0 at half scale. For non-sinusoidal waveform, add 0.1% of reading \pm 0.3% of range.

[3] The additional error to be added as frequency >20 kHz and signal input <10% of range: 3 counts of LSD per kHz.

[4] The additional error to be added as frequency >15 kHz and signal input <10% of range: 3 counts of LSD per kHz.

[6] Input current >35 μ Arms.

[7] Current can be measured from 2.5 A up to 10 A continuously. An additional 0.5% needs to be added to the specified accuracy if the signal measured is in the range of 10 A ~ 20 A for 30 seconds maximum. After measuring a current of >10 A, leave the meter to cool down for twice the measuring time used before application of low current measurement.

[8] Input current < 3 Arms.

[9] For non-square wave signals, add 5 counts.

[10] AC voltage and AC current specifications are true RMS AC coupled, valid from 5% to 100% of range.

Peak Hold

Signal Width	Accuracy for DC mV/Voltage/Current
Single event > 1 ms	2% + 400 for all ranges
Repetitive > 250 μ s	2% + 1000 for all ranges

Duty Cycle and Pulse Width^[1]

Function	Mode	Range	Accuracy at Full Scale
Duty Cycle	DC Coupling	0.01% ~ 99.99%	0.3% per kHz + 0.3%
Pulse Width	500 ms	0.01 ms	0.2% + 3
	2000 ms	0.1 ms	0.2% + 3

[1] The positive or negative pulse width must be greater than 10 μ s, and the duty cycle range should be considered. The pulse width range is determined by the frequency of the signal.

U1252B/U1253B Frequency Counter Specifications

Division	Range	Resolution	Accuracy \pm (% of reading + No. of Least Significant Digit)		Sensitivity	Min. Input Frequency	Maximum Measurement Level
			U1252B	U1253B			
1 (secondary display "-1-")	99.999 Hz	0.001 Hz	0.02% + 3 ^[1]	0.02% + 3 ^[1]	100 mV R.M.S.	0.5 Hz	< 30 Vpp
	999.99 Hz	0.01 Hz	0.002% + 5, <985 kHz	0.002% + 5, < 985 kHz			
	9.9999 kHz	0.0001 kHz					
	99.999 kHz	0.001 kHz					
	999.99 kHz	0.01 kHz					
9.9999 MHz	0.0001 MHz	0.002% + 5, < 1 MHz		200 mV R.M.S.			
100 (secondary display "-100-")	9.9999 MHz	0.0001 MHz	0.002% + 5, < 20 MHz	0.002% + 5, < 20 MHz	400 mV R.M.S.	1 MHz	
	99.999 MHz	0.001 MHz	MHz		600 mV R.M.S.		

U1252B/U1253B Square Wave Output

Output ^[2]	Range	Resolution	Accuracy
Frequency	0.5, 1, 2, 5, 6 ^[6] , 10, 15, 20, 25, 30, 40, 50, 60, 75, 80, 100, 120, 150, 200, 240, 300, 400, 480, 600, 800, 1200, 1600, 2400, 48000 Hz	0.01 Hz	0.005% + 2
Duty Cycle ^[3]	0.39% ~ 99.60%	0.390625%	0.4% of full scale ^[4]
Pulse Width ^[4]	1/Frequency	Range/256	0.2 ms + Range/256
Amplitude	Fixed 0 ~ +2.8 V	0.1 V	0.2 V

Display Rate

Function	Times/Second
ACV	7
ACV + dB	7
DCV	7
AC + DC V	2
Ω /nS	14
Diode	14
Capacitance	4 (< 100 μ F)
DCI	7
ACI	7
AC + DC I	2
Temperature	6
Frequency	1 (>10 Hz)
Duty cycle/Pulse width	0.5 (>10 Hz)

Manual and Interval Data Logging

Logging Type	Maximum Data Points ^[5]		
	U1251B	U1252B	U1253B
MANUAL	100	100	100
INTERVAL	200	200	1000

Decibel (Db) Calculation

dB Base	Reference	Default Reference
1 m Ω (dBm)	1-9999 Ω	50 Ω
1 V (dBV)	1 V	1 V

[1] All frequency counters are susceptible to errors. Shielding inputs from external noise pickup is critical to minimize measurement errors. For non-square wave signals, add 5 counts.

[2] Output impedance: 3.5 k Ω maximum.

[3] The positive or negative pulse width must be greater than 50 μ s for adjustment of the duty cycle or pulse width under different frequencies. Otherwise, the accuracy and range will be different from the specifications defined.

[4] For signal frequencies greater than 1 kHz, an addition of 0.1% per kHz is added to the accuracy.

[5] For data logging to PC, maximum number of data points is dependent on available hard disk space.

[6] For the U1253B model.

Input Impedance

Table A

Function	Range	U1251B	U1252B/U1253B
DC Voltage	50 mV to 1000 mV	10 M Ω	10 M Ω
	5 V to 1000 V	10 M Ω (nominal), with 10 M Ω in parallel at dual display	10 M Ω (nominal), with 10 M Ω in parallel at dual display
AC Voltage	50 mV to 1000 mV	10 M Ω in parallel with < 100 pF	10 M Ω in parallel with < 100 pF
	5 V to 1000 V		
AC + DC Voltage	50 mV to 1000 mV	N/A	10 M Ω
	5 V to 1000 V		10 M Ω (nominal) in parallel with 10 M Ω , < 100 pF

General Specifications

Display

- Both primary and secondary displays are 5-digit on the LCD display.
- Both the primary and secondary displays offer a maximum resolution of 50,000 counts.
- Automatic polarity indication.

Connectivity

- IR to USB

Power Consumption

- 105 mVA/420 mVA (with backlight) maximum (U1251B)
- 165 mVA/480 mVA (with backlight) maximum (U1252B)
- 420 mVA maximum (U1253B)

Battery Type

- 9 V Alkaline battery (ANSI/NEDA 1604A or IEC 6LR61)
- 9 V Carbon-zinc battery (ANSI/NEDA 1604D or IEC6F22)
- 7.2 V or 8.4 V Ni-MH Rechargeable battery

Battery Life

- U1251B: 72 hours typical
- U1252B: 36 hours typical
- U1253B: 8 hours typical

Operating Environment

- Full accuracy at $-20\text{ }^{\circ}\text{C}$ to $55\text{ }^{\circ}\text{C}$; and to 80% RH for temperatures up to $35\text{ }^{\circ}\text{C}$, decreasing linearly to 50% RH at $55\text{ }^{\circ}\text{C}$
- 0 to 2000 m altitude per IEC 61010-1 2nd Edition CAT III, 1000 V/CAT IV, 600 V

Storage Compliance

- $40\text{ }^{\circ}\text{C}$ to $70\text{ }^{\circ}\text{C}$ with battery removed

Safety Compliance

- IEC 61010-1:2001/EN610101-1:2001
- Canada: CSA C22.2 No. 61010-1:2004

Measurement Category

- CAT III 1000 V / CAT IV 600 V

Emc Compliance

- Certified to IEC/EN 61326: 2002, CISPR 11, and equivalents for Group 1, Class A

Common Mode Rejection Ratio (CMRR)

- U1251B/U1252B: $>90\text{ dB}$ at DC, 50/60 Hz $\pm 0.1\%$ (1 kW unbalanced)
- U1253B: $>100\text{ dB}$ at DC, 50/60 Hz $\pm 0.1\%$ (1 kW unbalanced)

Normal Mode Rejection Ratio (NMRR)

- U1251B/U1252B: $>60\text{ dB}$ at DC, 50/60 Hz $\pm 0.1\%$
- U1253B: $>90\text{ dB}$ at DC, 50/60 Hz $\pm 0.1\%$

Temperature Coefficient

- 0.15 * (specified accuracy)/ $^{\circ}\text{C}$ (from $20\text{ }^{\circ}\text{C}$ to $18\text{ }^{\circ}\text{C}$ or $28\text{ }^{\circ}\text{C}$ to $55\text{ }^{\circ}\text{C}$)

Shock and Vibration

- Tested to IEC/EN 60068-2

Dimensions (HxWxD)

- 203.5 mm x 94.4 mm x 59.0 mm

Weight

- U1251B: $504\pm 5\text{ g}$ with battery
- U1252B/U1253B: $527\pm 5\text{ g}$ with battery

Warranty

- 3 years for main unit
 - 3 months for standard accessories unless otherwise specified.
-

Ordering Information



U1251B



U1252B



U1253B

Standard Shipped Accessories

Description	Applicable Models		
	U1251B	U1252B	U1253B
Alligator clips	■	■	■
SMT grabbers	–	–	–
Fine-tip test probes	–	–	–
Test probe leads (4-mm)	■	■	■
Mini grabber	–	–	–
Alkaline 9 V battery	■	–	–
Rechargeable Ni-MH battery with power adapter	–	■	■
Soft carrying case	–	–	–
Certificate of Calibration	■	■	■
Test Report	■	■	■
Quick Start Guide	■	■	■

Optional Accessories

Measuring Accessories (Non-temperature)



U1161A Extended Test Lead Kit

Includes two test leads (red and black), two test probes, medium-sized alligator clips and 4-mm banana plugs.

- Test leads: CAT III 1000 V, CAT IV 600 V, 15 A
- Test probes: CAT III 1000 V, CAT IV 600 V, 15 A
- Medium Sized Alligator Clips: CAT III 1000 V, CAT IV 600 V, 15 A
- 4-mm banana plugs: CAT II 600 V, 10 A



U1162A Alligator Clips

- One pair of insulated alligator clips (red and black). Recommended for use with Keysight standard test leads.
- Rated CAT III 1000 V, CAT IV 600 V, 15 A.



U1163A SMT Grabbers

- One pair of SMT grabbers (red and black). Recommended for use with Keysight standard test leads.
- Rated CAT II 300 V, 3 A.



U1164A Fine-tip Test Probes

- One pair of fine-tip test probes (red and black). Recommended for use with Keysight standard test leads.
- Rated CAT II 300 V, 3 A.

Optional Accessories (continued)

Measuring Accessories (Non-temperature, continued)



U1168A Standard Test Lead Kit

Includes two test leads (red and black), 19-mm and 4-mm test probes, alligator clips, fine-tip test probes, SMT grabbers and mini grabber (black).

- Test leads: CAT III 1000 V, CAT IV 600 V, 15 A
- Test probes (19mm tip): CAT II 1000 V, 15 A
- Test probes (4-mm tip): CAT III 1000 V, CAT IV 600 V, 15 A (highly recommended for CAT IV environment)
- Alligator clips: CAT III 1000V, CAT IV 600 V, 15 A
- Fine-tip test probes: CAT II 300 V, 3 A
- SMT grabber: CAT II 300 V, 3 A
- Mini grabber: CAT II 300 V, 3 A



U1169A Test Probe Leads

Includes two test leads (red and black), and a pair each of 19-mm and 4-mm test probes.

- Test leads: CAT III 1000 V, CAT IV 600 V, 15 A
- Test probe (19-mm tip): CAT II 1000 V, 15 A
- Test probes (4-mm tip): CAT III 1000 V, CAT IV 600 V, 15 A (highly recommended for CAT IV environment)



U1583B AC Current Clamp

- Dual range: 40 A and 400 A
- Rated CAT III 600 V
- BNC-to-banana-plug adapter provided for use with DMMs

Measuring Accessories (Temperature)



U1180A Thermocouple Adapter+Lead Kit, J and K Types

Includes thermocouple adapter, thermocouple bead J-type and thermocouple bead K-type.

- T/C adapter J/K-type
- T/C bead J-type: $-20\text{ }^{\circ}\text{C}$ to $200\text{ }^{\circ}\text{C}$
- T/C bead K-type: $-20\text{ }^{\circ}\text{C}$ to $200\text{ }^{\circ}\text{C}$



U1181A Immersion Temperature Probe

- Type-K T/C for use in oil and other liquids
- Measurement range: $-50\text{ }^{\circ}\text{C}$ to $700\text{ }^{\circ}\text{C}$
- Includes adapter U1184A for connection to DMM



U1182A Industrial Surface Temperature Probe

- Type-K T/C for use on still surfaces
- Measurement range: $-50\text{ }^{\circ}\text{C}$ to $400\text{ }^{\circ}\text{C}$
- Includes adapter U1184A for connection to DMM




U1183A Air Temperature Probe

- Type-K T/C for use in air and non-caustic gas
- Measurement range: $-50\text{ }^{\circ}\text{C}$ to $800\text{ }^{\circ}\text{C}$
- Includes adapter U1184A for connection to DMM



U1184A Temperature Probe Adapter

- Mini-connector-to-banana-plug adapter for use with DMM



U1185A J-type Thermocouple and Adapter

- T/C adapter J/K-type
- T/C bead J-type: $-20\text{ }^{\circ}\text{C}$ to $200\text{ }^{\circ}\text{C}$

Measuring Accessories (Temperature, continued)



U1186A K-type Thermocouple and Adapter

- T/C adapter J/K-type
- T/C bead J-type: $-20\text{ }^{\circ}\text{C}$ to $200\text{ }^{\circ}\text{C}$

Cable



U1173A IR-to-USB Cable

- For remote control and data logging to PC
- Max. baud rate: 19,200 bits per second

Carrying Case



U1172A Transit Case (Aluminium-clad)

- The robust casing to transport your DMM and accessories
- Aluminum-clad, black panel construction
 - Dimension: 18" (H) x 13" (W) x 6" (D)
 - Weight: 4 kg



U1174A Soft Carrying Case

- The convenient way to carry your DMM and essential accessories
- Dimension: 9" (H) x 5" (W) x 3" (D)

Hanging Kit



U1171A Magnetic Hanging Kit

- For fastening of DMM to a steel surface so both hands are free.

AC Adaptor



U1170A AC Adaptor

- Includes AC power cord based on country

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



www.keysight.com/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/handhelddmm

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-07-10-14)



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Leads](#) category:

Click to view products by [Keysight](#) manufacturer:

Other Similar products are found below :

[R928010000](#) [R928142000](#) [1301430020](#) [15101](#) [15115](#) [15117](#) [15301](#) [15303](#) [15304](#) [15102](#) [15120](#) [15308](#) [15408](#) [15302](#) [15306](#) [15307](#) [15403](#)
[15407](#) [15409](#) [15501](#) [15506](#) [EM3782-12-7#](#) [EM4702-12-0](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [2524-A-60](#) [924961-C](#)
[924964-C](#) [924966-C](#) [924967-C](#) [LB1F-2R-RED](#) [LB1F-2R-YLW](#) [2500](#) [2501](#) [2524-A-48](#) [2977-J-48](#) [R928051000](#) [R928141000](#) [R928143000](#)
[R948131000](#) [BU-1449-E-12-2](#) [BU-1480-E-24-0](#) [BU-1481-E-12-2](#) [BU-1481-E-24-2](#) [LB1F-2R-BLK](#) [LB1F-2R-BLUE](#) [EM3542-1#](#) [EM3782-](#)
[12-8#](#) [6345](#)