

Thermal motor protector
Temperature limiter
Thermal cut-out

B

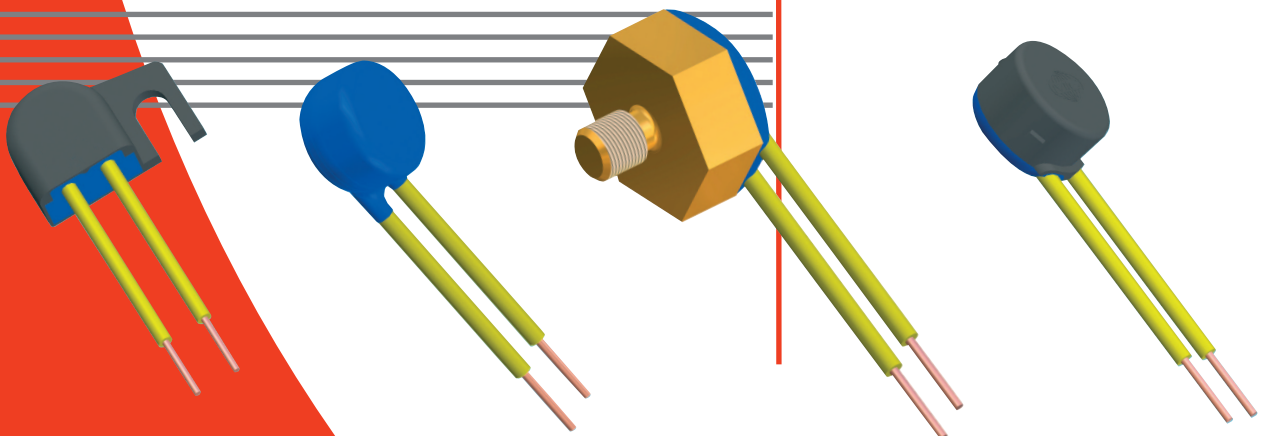
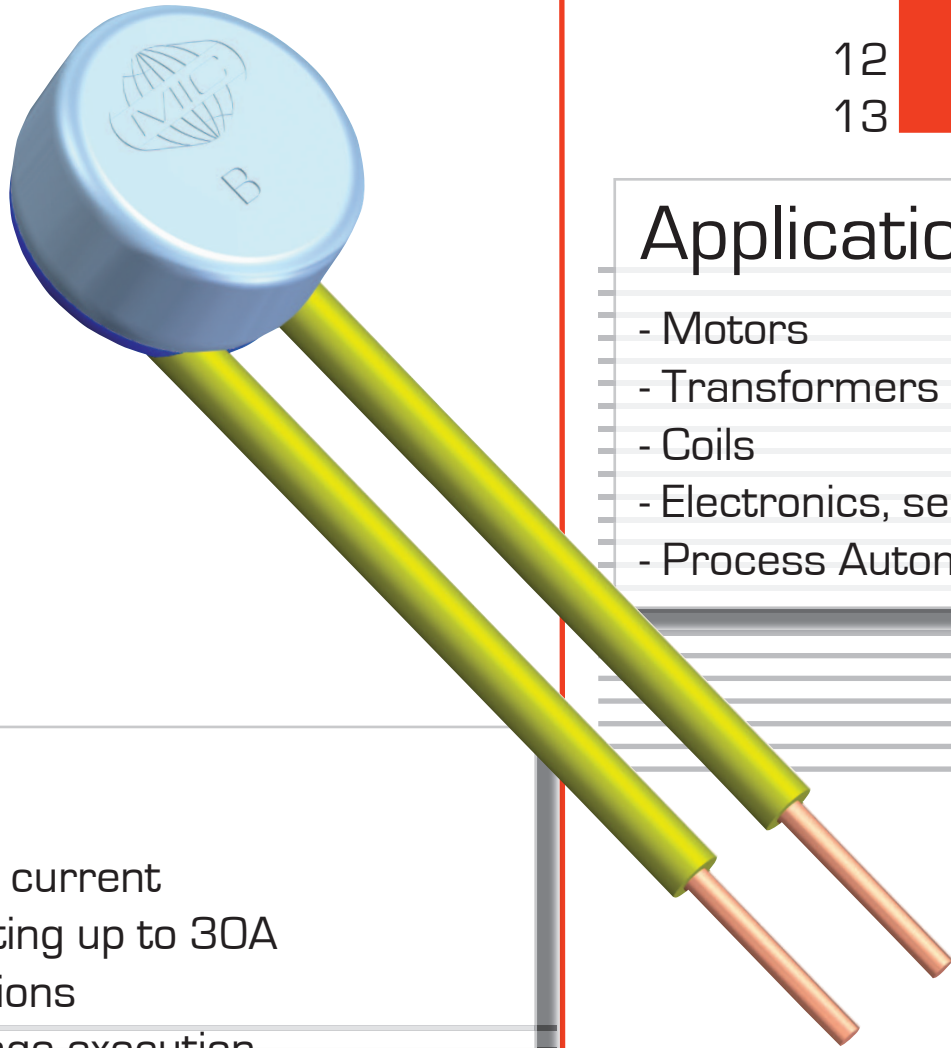
12
13

Applications

- Motors
- Transformers
- Coils
- Electronics, sensors
- Process Automation

Benefits

- Non-sensitive to current
- High current rating up to 30A
- Manifold executions
- Special low voltage execution







MICROTHERM



Microtherm International Cooperation

Technical data





type ratings	control			
	B12A / E		B12B / G	B13N / T
version	normally closed		normally open	normally closed/ open
rated current at 250 V 50/60 Hz (cos φ 0.95 / 0.6)	6.3 A / 6.0 A	10.0 A / 6.0 A	5.0 A / 1.6 A	1...100 mA (24 Vdc)
switching cycles under rated current	10,000	5,000	5,000	10,000
max. current under failure conditions at 250 V 50/60 Hz (cos φ 0.95)	30.0 A			-
switching cycles under max. current	100			-
temperature rating T _a (steps in 5 K)	70 °C ... 190 °C	70 °C ... 160 °C	70 °C ... 155 °C	70 °C ... 160 / 155 °C
tolerances	standard: ± 5 K			
feature of automatic action	1.B.M, 2.B, 1.C		1.B	-
contact resistance (incl. wire of 100 mm)	< 50 mΩ			
hysteresis	30 K ± 15 K ¹⁾			
dielectric strength (standard insulation)	2 kV			-
shock / vibration testing (similar to EN 50155)	400 m/s ² sine half wave / 100 m/s ² 5 Hz ... 2.000 Hz sine			
resistances to impregnation	tight against ordinary resins and lacquers			
degrees of protection provided by enclosures (EN 60529)	IP00			
suitable for use in protection category	I, II			-
approvals	VDE / ENEC 	EN 60730-1 / -2-9		no approval required to voltage ratings lower than 42 V
	UL 	UL 2111 / UL 873 ²⁾		
	CSA / cUL 	C22.2 No. 77 / C22.2 No. 24 ²⁾		
	CQC 	GB14536.1-1998 / GB14536.10-1996 ²⁾		

¹⁾ at the T_a (upper and lower) limits the hysteresis could deviate ²⁾ on request













Standard wire (length 100 ± 10 mm, stripped 6 ± 1 mm)

lead	code	temperature max.	operating voltage max.	approx. diameter insulation	approx. cross section diameter ²⁾	UL style
stranded white	L300 ¹⁾	150 °C	300 V	1.50 mm	AWG24 / 0.25 mm ²	3398
	L310			1.82 mm	AWG20 / 0.50 mm ²	
	L320			2.10 mm	AWG18 / 1.00 mm ²	
	L360 ¹⁾	200 °C	600 V	1.20 mm	AWG24 / 0.25 mm ²	10086
	L370			1.60 mm	AWG20 / 0.50 mm ²	
	L380			1.80 mm	AWG18 / 1.00 mm ²	
solid yellow	L410	150 °C	300 V	1.66 mm	AWG20 / 0.80 mm	3398
	L440	200 °C	300 V	1.54 mm	AWG20 / 0.80 mm	1332

¹⁾ B13 only ²⁾ AWG20 is recommended


control type	nc	no	code	illustration	drawing dimensions (mm)	technical specification	approvals ¹⁾
B12 B13	A N	B T	U253			shrink cap potted	VDE, UL, cUL
B12 B13	A N	B T	U186			cap of PPS potted	VDE, UL, cUL

Specific variations

control type	nc	no	code	illustration	drawing dimensions (mm)	technical specification	approvals ¹⁾
B12 B13	A N	B T				not insulated potted	VDE, UL, cUL, CSA
B12 B13	A N	B T	U112			coated T _a max. 160°C	VDE, UL, cUL
B12 B13	A N	B T	U294			housing of PPS potted T _a max. 160°C	VDE, UL, cUL
B12 B13	A N	B T	A800			not insulated potted	VDE, UL, cUL
B12 B13	E N	G T	G402			aluminium housing thread M4x6 potted T _a max. 150 °C	VDE, UL, cUL
B12 B13	E N	G T	G714			brass housing thread M4x5 potted T _a max. 150 °C	VDE, UL, cUL

¹⁾ B12 only

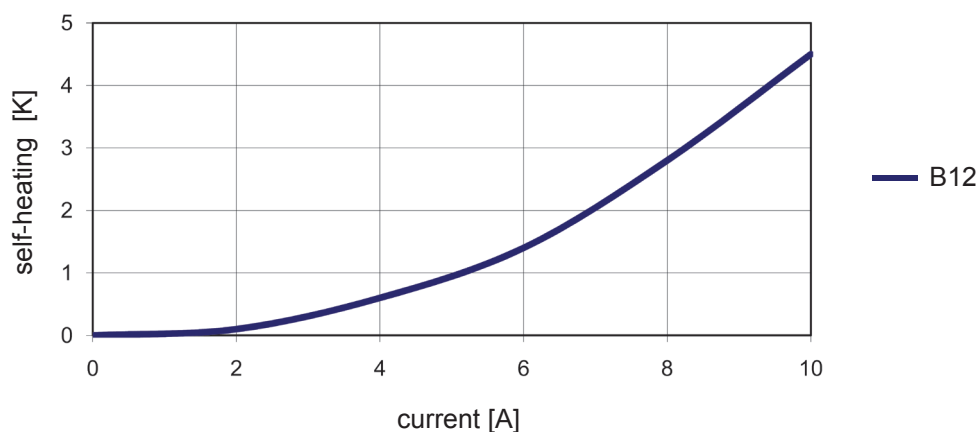Heating by current




The diagram is measured with a thermal control without any insulation in an oil bath.

Attention:

The heating depends on the thermal conduction of the control to the equipment or part which should be protected.

Ordering and marking example

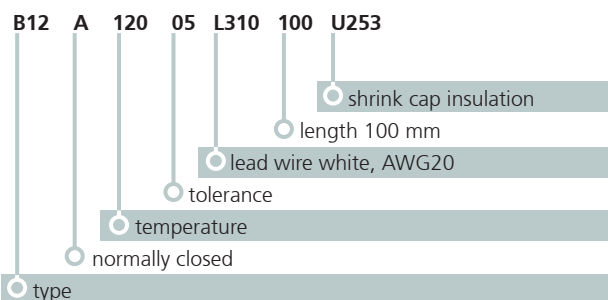Ordering example



Marking

- B12A** type (B12 nc)
12005 response temperature (120°C), tolerance ($\pm 5K$)
051D date of manufacture (May 2011), country (D=Germany)



Representation office:

Microtherm GmbH
Taschenwaldstraße 3
Postfach 1208
D-75112 Pforzheim

Fon: +49 (0)7231 787-0
Fax: +49 (0)7231 787-155
E-Mail: info@microtherm.de
Internet: www.microtherm.de

Deviations from standard controls on request.

MICROTHERM



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Microtherm](#) manufacturer:

Other Similar products are found below :

[05EN1034\(115/M\)](#) [52N12T044\(225/175\)](#) [05N1034\(80/M\)](#) [T11A07005U112L310100](#) [B12A10005U112L310100](#) [B12A12005U112L310100](#)
[B12A16005U112L370100](#) [A130 05EN4172](#) [05N1034\(90/M\)](#) [05N1034\(65/M\)](#) [B12A18010U253L370100](#) [52N12T944\(200/160\)](#)
[55H12T944\(250/200\)](#) [T11A09005U112L310100](#) [T11A12005U112L310100](#) [B12A12505U112L310100](#) [T11A08005U112L310100](#)
[B12A06005U112L310100](#) [T11A11005U112L310100](#) [T11A12505L310100U112](#) [T11A10005U112L310100](#) [05N1034\(55/M\)](#)
[03EN151044\(50/35\)](#)