

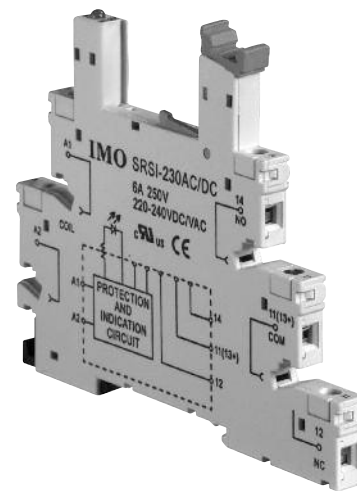



## Characteristics

Ambient temperature	-40 to 70 °C
Rated voltage	250VAC
Rated current	6A (Per pole)
Insulation voltage (min.)	5000VAC
Protection degree	IP20
Socket material	PA66+GF V0 (UL)
Contacts spring material	QSn6.5-0.1
Retainer	No
Modules (on request)	Self-contained
Terminal torque	0.6Nm
Wire strip length	7mm



## Outline dimensions

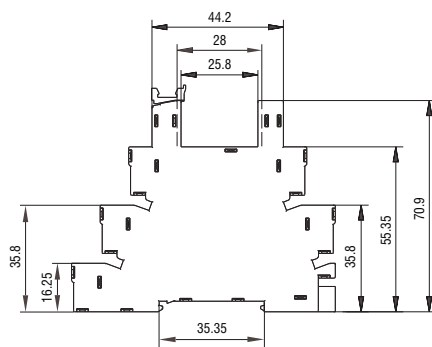


## Socket/relay compatibility

Socket P/N	Input voltage	Relay coil voltage
SRSI-24AC/DC	6 to 24VDC/VAC	6 to 24VDC
SRSI-60AC/DC	48 to 60VDC/VAC	48 to 60VDC
SRSI-110AC/DC	110 to 125VDC/VAC	60VDC
SRSI-230AC/DC	220 to 240VDC/VAC	60VDC

Note: Input voltage polarity not required

## SRSI- CC20 Busbar available in 20 way

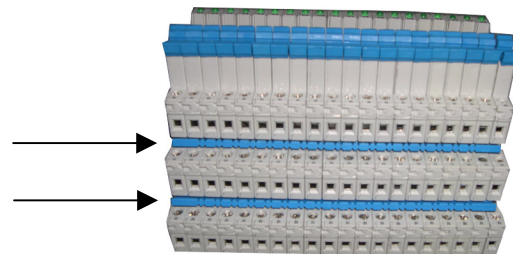

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for imo manufacturer:*

Other Similar products are found below :

[20.155MV/12-E](#) [MC14N-S-10110AC](#) [MB09-S-10=24](#) [DPS-1-030-24](#) [SRF-1C-SL-12VDC](#) [MB09-S-1024](#) [LDC18RRS](#) [SFSYE0111](#)  
[21.1500M/6-E](#) [20.3304M/2-E](#) [21.910M/5-E](#) [20.95MA/2-E](#) [21.95MHF/2-E](#) [PE69-4032](#) [DPS-1-060-24](#) [CS20A-A2](#) [CS20A-U1](#) [VFC02](#)  
[MSSTC11DA06](#) [20.95MHF/3-E](#) [B3T10](#) [XKL-040-21](#) [20.3304M/4-E](#) [SRDH-1A-SL-24VDC](#) [20.2500M/5-E](#) [21.155MH/12](#) [SRRHN-2CN-](#)  
[SL-12VDC](#) [20.920M/5-E](#) [MC10N-S-10110AC](#) [21.1550MF/8-E](#) [20.910M/6-E](#) [20.95MH/3-E](#) [21.95MV/3](#) [MA05-S-01230AC](#) [SRRHN-2CN-](#)  
[SL-5VDC](#) [LB69-4040](#) [20.3001M/6](#) [21.1500M/3-E](#) [SFSYE0311](#) [21.95MHF/6-E](#) [20.95MV/2-E](#) [20.155MV/4-E](#) [20.155MH/4-E](#) [20.950M/2-E](#)  
[MT5 1-50-FAR](#) [BS3P3REDO](#) [MB12-S-10=24](#) [MA05-S-1024DC](#) [20.155MVF/8-E](#) [20.2500MV/8-E](#)