



# SMT Power Inductor - ME3220



- Miniature power inductor: 2.5 x 3.2 base x 2.0 mm tall
- Specified by NSC for their LM2830 Buck Converter

**Designer's Kit C386** contains samples of all values

**Core material** Ferrite

**Core and winding loss** See [www.coilcraft.com/coreloss](http://www.coilcraft.com/coreloss)

**Terminations** RoHS tin-silver over tin over nickel over silver. Other terminations available at additional cost.

**Weight** 56 – 65 mg

**Ambient temperature** -40°C to +85°C with (40°C rise) Irms current.

**Maximum part temperature** +125°C (ambient + temp rise). [Derating](#).

**Storage temperature** Component: -40°C to +125°C.

Tape and reel packaging: -40°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

**Packaging** 2000/7" reel; 7000/13" reel Plastic tape: 12 mm wide, 0.25 mm thick, 4 mm pocket spacing, 2.25 mm pocket depth

**PCB washing** Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787\\_PCB\\_Washing.pdf](Doc787_PCB_Washing.pdf).

| Part number <sup>1</sup> | Inductance <sup>2</sup><br>(µH) | DCR<br>max <sup>3</sup><br>(Ohms) | SRF<br>typ <sup>4</sup><br>(MHz) | Isat (A) <sup>5</sup> |             |             | Irms (A) <sup>6</sup> |              |
|--------------------------|---------------------------------|-----------------------------------|----------------------------------|-----------------------|-------------|-------------|-----------------------|--------------|
|                          |                                 |                                   |                                  | 10%<br>drop           | 20%<br>drop | 30%<br>drop | 20°C<br>rise          | 40°C<br>rise |
| ME3220-102ML_            | 1.0±20%                         | 0.058                             | 170.7                            | 2.7                   | 3.0         | 3.2         | 2.0                   | 2.6          |
| ME3220-152ML_            | 1.5±20%                         | 0.068                             | 138.0                            | 2.2                   | 2.5         | 2.7         | 1.6                   | 2.2          |
| ME3220-222ML_            | 2.2±20%                         | 0.104                             | 92.6                             | 1.8                   | 2.1         | 2.2         | 1.5                   | 2.0          |
| ME3220-332ML_            | 3.3±20%                         | 0.138                             | 75.6                             | 1.5                   | 1.6         | 1.7         | 1.4                   | 1.6          |
| ME3220-472ML_            | 4.7±20%                         | 0.190                             | 58.2                             | 1.2                   | 1.4         | 1.5         | 1.0                   | 1.3          |
| ME3220-562ML_            | 5.6±20%                         | 0.200                             | 52.5                             | 1.1                   | 1.3         | 1.4         | 1.0                   | 1.3          |
| ME3220-682ML_            | 6.8±20%                         | 0.270                             | 46.2                             | 1.0                   | 1.1         | 1.2         | 0.88                  | 1.1          |
| ME3220-822ML_            | 8.2±20%                         | 0.290                             | 45.2                             | 0.98                  | 1.0         | 1.1         | 0.80                  | 1.0          |
| ME3220-103KL_            | 10±10%                          | 0.434                             | 39.9                             | 0.78                  | 1.0         | 1.1         | 0.63                  | 0.87         |
| ME3220-123KL_            | 12±10%                          | 0.470                             | 37.5                             | 0.76                  | 0.88        | 0.98        | 0.61                  | 0.84         |
| ME3220-153KL_            | 15±10%                          | 0.520                             | 32.5                             | 0.70                  | 0.80        | 0.90        | 0.58                  | 0.83         |
| ME3220-183KL_            | 18±10%                          | 0.696                             | 31.7                             | 0.66                  | 0.75        | 0.80        | 0.49                  | 0.70         |
| ME3220-223KL_            | 22±10%                          | 0.787                             | 29.4                             | 0.59                  | 0.67        | 0.71        | 0.47                  | 0.64         |
| ME3220-273KL_            | 27±10%                          | 1.19                              | 26.1                             | 0.56                  | 0.63        | 0.67        | 0.40                  | 0.54         |
| ME3220-333KL_            | 33±10%                          | 1.27                              | 23.0                             | 0.50                  | 0.57        | 0.60        | 0.39                  | 0.53         |
| ME3220-393KL_            | 39±10%                          | 1.38                              | 22.6                             | 0.45                  | 0.51        | 0.54        | 0.34                  | 0.47         |
| ME3220-473KL_            | 47±10%                          | 1.80                              | 20.7                             | 0.40                  | 0.46        | 0.49        | 0.30                  | 0.45         |
| ME3220-563KL_            | 56±10%                          | 2.10                              | 20.3                             | 0.37                  | 0.42        | 0.45        | 0.27                  | 0.43         |
| ME3220-683KL_            | 68±10%                          | 2.30                              | 16.3                             | 0.34                  | 0.38        | 0.41        | 0.26                  | 0.38         |
| ME3220-823KL_            | 82±10%                          | 3.00                              | 13.7                             | 0.30                  | 0.34        | 0.36        | 0.25                  | 0.34         |
| ME3220-104KL_            | 100±10%                         | 3.50                              | 13.3                             | 0.28                  | 0.32        | 0.34        | 0.24                  | 0.32         |

1. Please specify **termination** and **packaging** codes:

**ME3220-104KLC**

**Termination:** **L** = RoHS tin-silver over tin over nickel over silver.

Special order:

**T** = RoHS tin-silver-copper (95.5/4/0.5) or **S** = non-RoHS tin-lead (63/37).

**Packaging:** **C** = 7" machine-ready reel. EIA-481 embossed plastic tape (2000 parts per full reel).

**B** = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter **C** instead.

**D** = 13" machine-ready reel. EIA-481 embossed plastic tape (7000 parts per full reel).

2. Inductance measured at 100 kHz, 0.1 Vrms, 0 Adc using Coilcraft SMD-A fixture in Agilent/HP 4284A impedance analyzer.

3. DCR measured on a micro-ohmmeter and Coilcraft CCF858 test fixture.

4. SRF measured using Agilent/HP 8753D network analyzer and Coilcraft SMD-D test fixture.

5. DC current at 25°C that causes the specified inductance drop from its value without current.

[Click for temperature derating information](#).

6. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.

[Click for temperature derating information](#).


7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.




# SMT Power Inductor – ME3220 Series



## Typical L vs Frequency

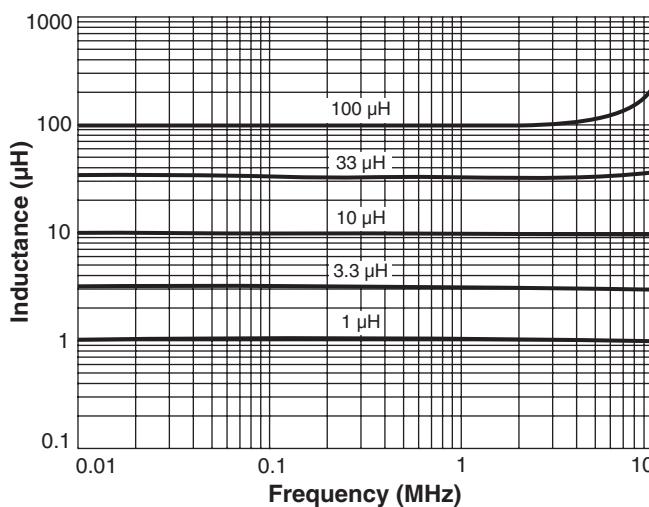

## Typical L vs Current

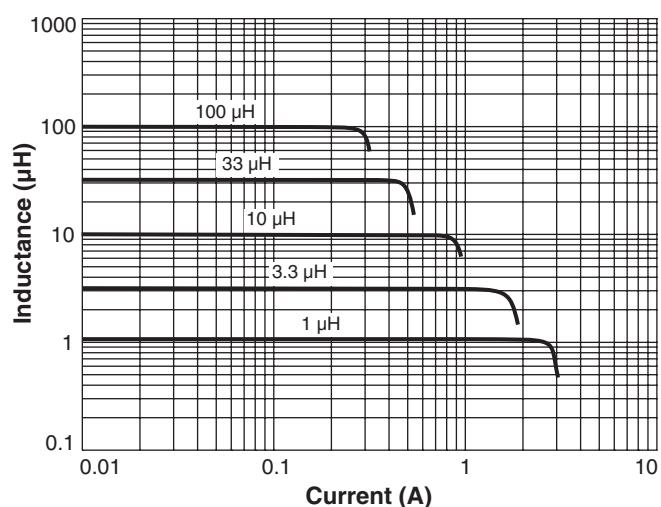

## Typical Temperature Rise vs Current

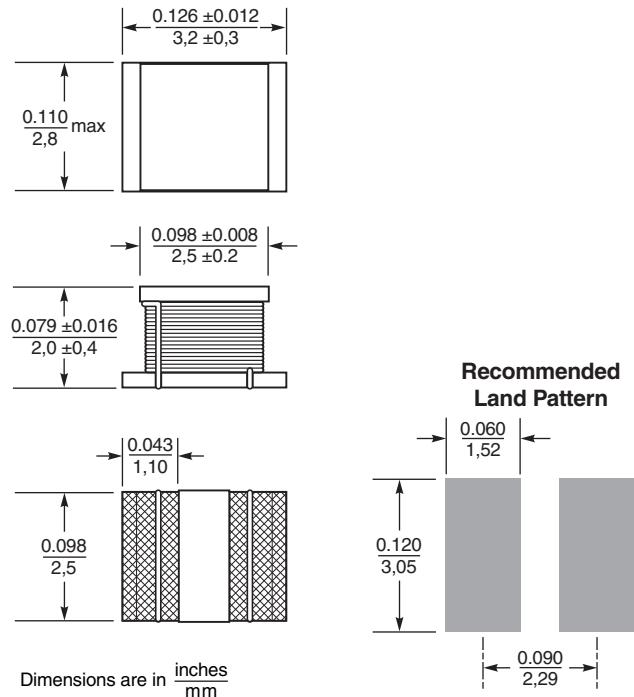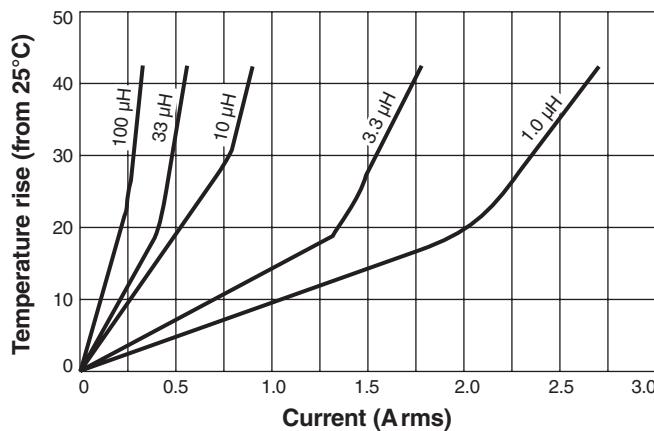

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Fixed Inductors category:***

***Click to view products by Coilcraft manufacturer:***

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)  
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)  
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)  
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)  
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)