

## T-1 (3mm) SOLID STATE LAMP

Part Number: WP710A10HD

Bright Red


### **Features**

- Low power consumption.
- Popular T-1 diameter package.
- General purpose leads.
- Reliable and rugged.
- Long life solid state reliability.
- Available on tape and reel.
- RoHS compliant.

### Description

The Bright Red source color devices are made with Gallium Phosphide Red Light Emitting Diode.

## **Package Dimensions**

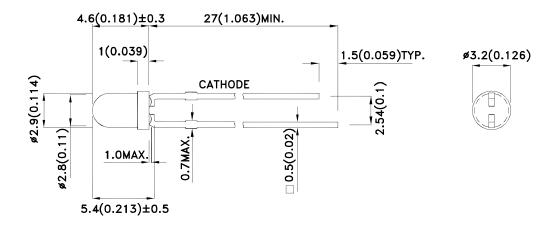

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is  $\pm 0.25(0.01")$  unless otherwise noted.
- Lead spacing is measured where the leads emerge from the package.
   The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

SPEC NO: DSAL9710 **REV NO: V.1 DATE: JUL/08/2011** APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.H.Wu





PAGE: 1 OF 6

ERP: 1101029240

## **Selection Guide**

Part No.	Dice	Lens Type	lv (mcd) [2] @ 10mA		Viewing Angle [1]
			Min.	Тур.	201/2
WP710A10HD	10A10HD Bright Red (GaP)		1.2	3	40°

- Notes: 1.  $\theta$ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value. 2. Luminous intensity/ luminous Flux: +/-15%.

## Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Bright Red	700		nm	IF=20mA
λD [1]	Dominant Wavelength	Bright Red	660		nm	I=20mA
Δλ1/2	Spectral Line Half-width	Bright Red	45		nm	IF=20mA
С	Capacitance	Bright Red	40		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Bright Red	2.25	2.5	V	IF=20mA
lR	Reverse Current	Bright Red		10	uA	VR = 5V


- Notes: 1.Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V.

### Absolute Maximum Ratings at TA=25°C

Parameter	Bright Red	Units	
Power dissipation	62.5	mW	
DC Forward Current	25	mA	
Peak Forward Current [1]	130	mA	
Reverse Voltage	5	V	
Operating/Storage Temperature	-40°C To +85°C	1	
Lead Solder Temperature [2]	260°C For 3 Seconds		
Lead Solder Temperature [3]	260°C For 5 Seconds		


- 1/10 Duty Cycle, 0.1ms Pulse Width.
   2mm below package base.
   5mm below package base.


SPEC NO: DSAL9710 **REV NO: V.1** DATE: JUL/08/2011 PAGE: 2 OF 6 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.H.Wu ERP: 1101029240

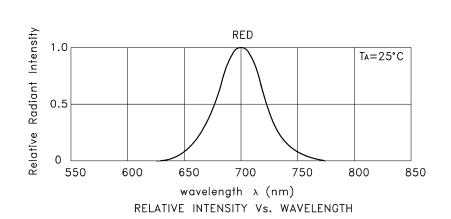



## **Bright Red**


## **WP710A10HD**













SPATIAL DISTRIBUTION

SPEC NO: DSAL9710 APPROVED: WYNEC REV NO: V.1 CHECKED: Allen Liu DATE: JUL/08/2011 DRAWN: Y.H.Wu PAGE: 3 OF 6 ERP: 1101029240

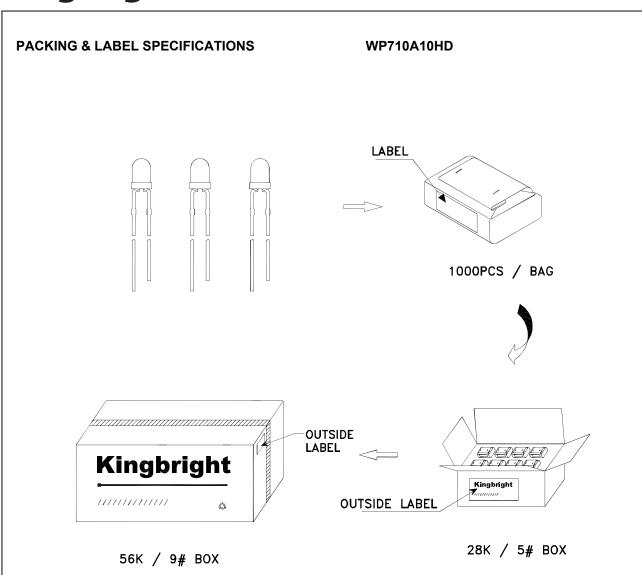


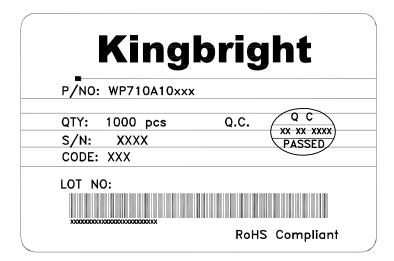

SPEC NO: DSAL9710 APPROVED: WYNEC REV NO: V.1 CHECKED: Allen Liu DATE: JUL/08/2011 DRAWN: Y.H.Wu PAGE: 4 OF 6 ERP: 1101029240


### **PRECAUTIONS**

1. The lead pitch of the LED must match the pitch of the mounting holes on the PCB during component placement. Lead—forming may be required to insure the lead pitch matches the hole pitch. Refer to the figure below for proper lead forming procedures. (Fig. 1)

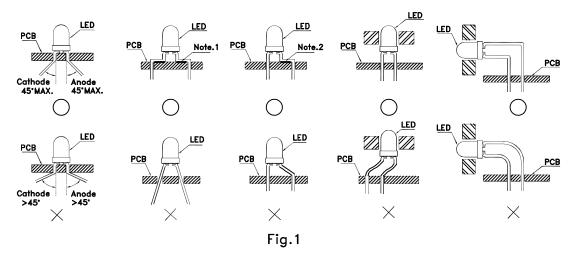

 $"\bigcirc$  " Correct mounting method "imes" Incorrect mounting method


- 2. When soldering wire to the LED, use individual heat—shrink tubing to insulate the exposed leads to prevent accidental contact short—circuit. (Fig.2)
- 3.Use stand—offs (Fig.3) or spacers (Fig.4) to securely position the LED above the PCB.




- 4. Maintain a minimum of 2mm clearance between the base of the LED lens and the first lead bend. (Fig. 5 and 6)
- 5. During lead forming, use tools or jigs to hold the leads securely so that the bending force will not be transmitted to the LED lens and its internal structures. Do not perform lead forming once the component has been mounted onto the PCB. (Fig. 7)

SPEC NO: DSAL9710 APPROVED: WYNEC REV NO: V.1 CHECKED: Allen Liu DATE: JUL/08/2011 DRAWN: Y.H.Wu PAGE: 5 OF 6 ERP: 1101029240


6. Do not bend the leads more than twice. (Fig. 8)



7. During soldering, component covers and holders should leave clearance to avoid placing damaging stress on the LED during soldering.

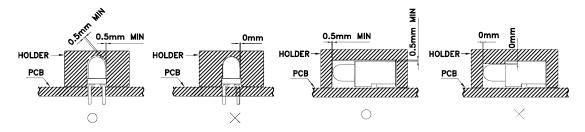

- 8. The tip of the soldering iron should never touch the lens epoxy.
- 9. Through—hole LEDs are incompatible with reflow soldering.
- 10. If the LED will undergo multiple soldering passes or face other processes where the part may be subjected to intense heat, please check with Kingbright for compatibility.
- 11. Recommended Wave Soldering Profile for Kingbright Thru-Hole Products

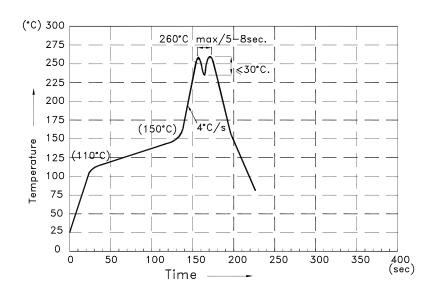

### NOTES:

- 1.Recommend the wave temperature 245°C $\sim$ 260°C.The maximum soldering temperature should be less than 260°C.
- 2.Do not apply stress on epoxy resins when temperature is over  $85^{\circ}\text{C}.$
- 3. The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
- 4.During wave soldering, the PCB top-surface temperature should be kept below 105°C.
- 5.No more than once.

SPEC NO: DSAL9710 REV NO: V.1 DATE: JUL/08/2011 PAGE: 6 OF 6
APPROVED: WYNEC CHECKED: Allen Liu DRAWN: Y.H.Wu ERP: 1101029240

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Standard LEDs - Through Hole category:

Click to view products by Kingbright manufacturer:

Other Similar products are found below:

LTL-10254W LTL-1214A LTL-2231AT LTL-3251A LTL-4262N LTL-433P LTL-5234 LTL87HTBK LTW-87HD4B HLMP-EL30-PS0DD 1L0532V23G0TD001 NSPW500CS NTE30036 NTE30044 NTE30059 NTE3020 LD CQDP-1U3U-W5-1-K

LP379PPG1C0G0300001 SLR-342MC3F SLX-LX3044GD SLX-LX3044ID SLX-LX3044YD 1.90690.3330000 SSS-LX4673ID-410B

1L0532Y24I0TD001 264-7SYGD/S530-E2 HLMP-1301-G00FG HLMP1385 LTL-10224W LTL-1224A LTL-1234A LTL-2251AT LTL-403HR LTL-4222 LU7-E-B 4380H1 HLMP-3962-F0002 HLMP-GG15-R0000 323-2SURD/S530-A3 L53SRC/E-Z L-7679C1ZGC

4302T1-5V 4306D23 4363D1/5 WP1503SRC/J4 WP153GDT WP153YDT WP1543SGC WP1543SURC WP53MGD