

# 3.3V, HCMOS, SMD Oscillator



Model: F4100 SERIES

RoHS Compliant / Pb Free

Rev. 1/16/2014

Page 1 of 2

[http://www.foxonline.com/need\\_a\\_sample.htm](http://www.foxonline.com/need_a_sample.htm)



## • PART NUMBER SELECTION

Part Number	Model Number	Frequency Stability <sup>1</sup>	Operating Temperature (°C)	Frequency Range (MHz)
116-Frequency-xxxxx	F4100	±100PPM	-10 ~ +70	0.012 ~ 170.000
117-Frequency-xxxxx	F4100R	±100PPM	-40 ~ +85	0.012 ~ 170.000
124-Frequency-xxxxx	F4105	±50PPM	-10 ~ +70	0.012 ~ 170.000
125-Frequency-xxxxx	F4105R	±50PPM	-40 ~ +85	0.012 ~ 170.000
126-Frequency-xxxxx	F4106	±25PPM	-10 ~ +70	0.012 ~ 165.000
127-Frequency-xxxxx	F4106R	±25PPM*	-40 ~ +85	0.012 ~ 156.520
128-Frequency-xxxxx	F4108	±20PPM*	-10 ~ +70	0.012 ~ 162.000

## • ELECTRICAL CHARACTERISTICS


PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	0.012 ~ 170.000 MHz
Storage Temperature Range (T <sub>STG</sub> )	-55°C ~ +125°C
Supply Voltage (V <sub>DD</sub> )	3.3V ± 10%
Input Current (I <sub>DD</sub> )	
0.012 ~ 0.040 MHz	3mA
0.040+ ~ 1.500 MHz	6mA
1.500+ ~ 32.000 MHz	15mA
32.000+ ~ 50.000 MHz	20mA
50.000+ ~ 67.000 MHz	25mA
67.000+ ~ 170.000 MHz	40mA
Output Symmetry (50% V <sub>DD</sub> )	
0.012 ~ 50.000 MHz	45% ~ 55%
50.000+ ~ 170.000 MHz	40% ~ 60%
Rise Time (10% ~ 90% V <sub>DD</sub> ) (T <sub>R</sub> )	
0.012 ~ 80.000 MHz	6nS
80.000+ ~ 125.000 MHz	4nS
125.000+ ~ 170.000 MHz	3nS
Fall Time (90% ~ 10% V <sub>DD</sub> ) (T <sub>F</sub> )	
0.012 ~ 80.000 MHz	6nS
80.000+ ~ 125.000 MHz	4nS
125.000+ ~ 170.000 MHz	3nS
Output Voltage (V <sub>OL</sub> )	10% V <sub>DD</sub>
(V <sub>OH</sub> )	90% V <sub>DD</sub> Min
Output Current (I <sub>OL</sub> )	2mA Min
(I <sub>OH</sub> )	-2mA Min
Output Load (HCMOS)	15pF
Standby Current	10µA
Start-up Time (T <sub>s</sub> )	
0.012 ~ 32.000 MHz	5mS
32.000+ ~ 170.000 MHz	10mS
Output Disable Time <sup>2</sup>	150nS
Output Enable Time <sup>2</sup>	
0.012 ~ 32.000 MHz	5mS
32.000+ ~ 170.000 MHz	10mS
Jitter (FO ≥ 100MHz)	
12kHz ~ 20MHz	0.3pS Typ.
RMS Period	2.5pS Typ.
Cycle-to-Cycle	20pS Typ.

<sup>1</sup>Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, aging, shock, and vibration. \*Excludes Shock/Vibration

<sup>2</sup>An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

Note: A 0.01µF bypass capacitor should be placed between V<sub>DD</sub> (Pin 4) and GND (Pin 2) to minimize power supply line noise. Drawing is for reference to critical specifications defined by size measurements.

Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary. All specifications subject to change without notice.

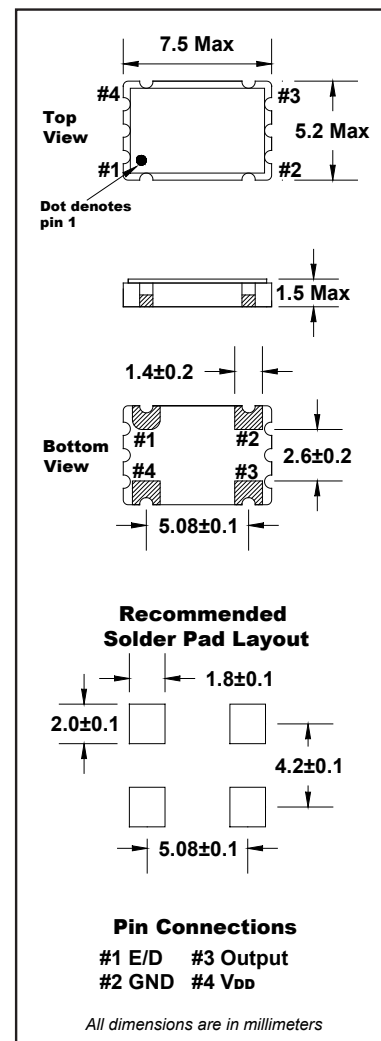

## • ENABLE / DISABLE FUNCTION<sup>2</sup>

INH (Pin 1)	OUTPUT (Pin 3)
OPEN <sup>2</sup>	ACTIVE
'1' Level V <sub>IH</sub> ≥ 70% V <sub>DD</sub>	ACTIVE
'0' Level V <sub>IL</sub> ≤ 30% V <sub>DD</sub>	High Z

# 3.3V, HCMOS, SMD Oscillator



Model: F4100 SERIES

RoHS Compliant / Pb Free

Rev. 1/16/2014

Page 2 of 2

[http://www.foxonline.com/need\\_a\\_sample.htm](http://www.foxonline.com/need_a_sample.htm)




## • TAPE SPECIFICATIONS (millimeters)

MODEL	A	B	C	D	E	F	STD Reel QTY
F4100 Series	∅1.5	4.0	8.0	7.5	16.0	2.15	2,000

## • REEL SPECIFICATIONS (millimeters)

MODEL	G	H	I	J	K	L	M
F4100 Series	2.0	∅13	∅21	∅80	∅255	17.5	2.0

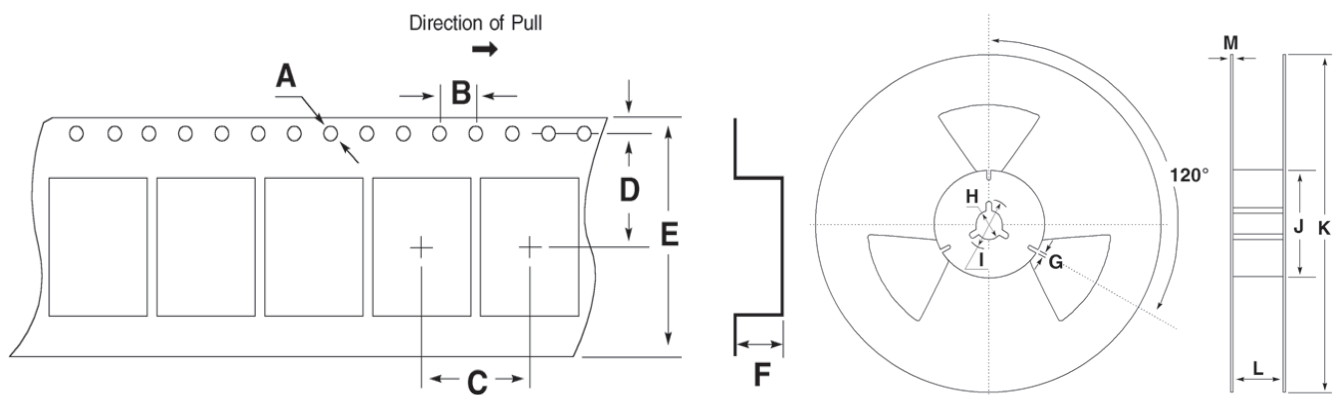

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Clock Oscillators](#) category:*

*Click to view products by [Fox](#) manufacturer:*

Other Similar products are found below :

[EP1400SJTSC-125.000M](#) [601137](#) [601252](#) [CSX750FBC-24.000M-UT](#) [CSX750FBC-33.333M-UT](#) [CSX750FCC-3.6864M-UT](#) [F335-12](#) [F335-25](#) [F535L-50](#) [DSC506-03FM2](#) [ASA-20.000MHZ-L-T](#) [ASA-25.000MHZ-L-T](#) [ASA-27.000MHZ-L-T](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [MXO45HS-2C-66.6666MHZ](#) [NBXDBB017LN1TAG](#) [NBXHBA019LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8003AC-11-33S-2.04800X](#) [SiT8256AC-23-33E-156.250000X](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [SMA4306-TL-H](#) [F335-24](#) [F335-40](#) [F335-50](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [CSX750FBC-20.000M-UT](#) [CSX-750FBC33333000T](#) [CSX750FBC-4.000M-UT](#) [CSX750FBC-7.3728M-UT](#) [CSX750FBC-8.000M-UT](#) [CSX-750FCC14745600T](#) [CSX750FCC-16.000M-UT](#) [CSX-750FCC40000000T](#) [CSX750FCC-4.000M-UT](#) [ASA-22.000MHZ-L-T](#) [ASA2-26.000MHZ-L-T](#) [ASA-40.000MHZ-L-T](#) [ASA-48.000MHZ-L-T](#) [ASA-60.000MHZ-L-T](#) [ASF1-3.686MHZ-N-K-S](#) [XLH735025.000JU4I8](#)